
















# LED Light Bulb Replacement Program

## Light Bulb Cross Reference Guide

OLD Style	LED Bulb Replacement Options	OLD Style	LED Bulb Replacement Options
G4 20 Watt Halogen	<b>41000P</b> Warm White <b>41001P</b> Cool White  Back Pin  Side Pin	<b>41020P</b> Warm White <b>41021P</b> Cool White 	<b>DUAL COLOR</b> - ONE BULB - TWO COLORS - ONE SWITCH Turn switch on to display color LED. Turn switch off and on again within 2 seconds for white LED. Turn switch off, wait for more than 2 seconds, turn switch back on for color LED. <b>41050P</b> Warm White/Blue <b>41051P</b> Warm White/Red <b>41052P</b> Cool White/Blue <b>41053P</b> Cool White/Red
G4 20 Watt Halogen	<b>41010P</b> Warm White <b>41011P</b> Cool White  Back Pin  Side Pin	<b>41030P</b> Warm White <b>41031P</b> Cool White 	#70 - 2W #161 - 3W #168 - 5W #194 - 4W WEDGE 
G4 20 Watt Halogen	<b>41070P</b> Warm White <b>41071P</b> Cool White 	<b>41072P</b> Warm White Halogen Look-Alike 	#906 - 9W #912 - 13W #921 - 18W WEDGE 
G4 20 Watt Halogen	<b>41040P</b> Warm White <b>41041P</b> Cool White 	<b>LED Replacement Light Bulbs</b>	
G4 Red or Blue Color	<b>41022P</b> Blue <b>41023P</b> Red 	<b>41032P</b> Blue <b>41033P</b> Red 	<ul style="list-style-type: none"> <li>• <b>Multi-Voltage 10-30 Volts DC (works with 12V and 24V unless noted in the chart)</b></li> <li>• <b>SAVE! Time and \$\$\$</b></li> <li>• Simple Conversion - just replace the light bulb</li> <li>• No need to hire an electrician</li> <li>• Replacement LEDs available for most popular bulbs</li> <li>• High Output SMD2835 or SMD5050 LEDs</li> <li>• More energy efficient, up to 80%</li> <li>• Less Heat and no special handling</li> <li>• <b>NEW!</b> Socket Adapters - 3 styles</li> </ul>

## SCAN-STRIP LED

The **Scan-Strip** can be used for general lighting, courtesy accent or anywhere extra illumination is needed; under gunwales, inside storage lockers, fish boxes or coolers.

- NEW Super Bright 2835 LEDs
- Available in Cool White, Blue, Red and Green
- Lifespan 50,000 + Hours
- 120° Beam Angle
- 12 Volt
- Can be installed in engine rooms and exterior locations (IP68)
- Ideal for under gunwale lighting
- SS Mounting Screws Included
- 3-year warranty
- 4" (4" L x 7/8" W x 1/2" H)
- 8" (9" L x 7/8" W x 1/2" H)
- 16" (16-1/8" L x 7/8" W x 1/2" H)
- 36" (36" L x 7/8" W x 1/2" H)


**\* IGNITION PROTECTION CERTIFIED**  
**Meets Requirements and Standards for SAE J1711**  
**USCG, ABYC & NMMA**

4" Scan-Strip 5 LEDs  
**41354P** White (5,500K)  
**41357P** Blue

8" Scan-Strip 17 LEDs  
**\* 41346P** White (5,500K)  
**\* 41347P** Blue  
**41348P** Red  
**41349P** Green

16" Scan-Strip 34 LEDs  
**\* 41350P** White (5,500K)  
**\* 41351P** Blue  
**41352P** Red  
**41353P** Green

36" Scan-Strip 85 LEDs  
**41358P** White (5,500K)  
**41359P** Blue

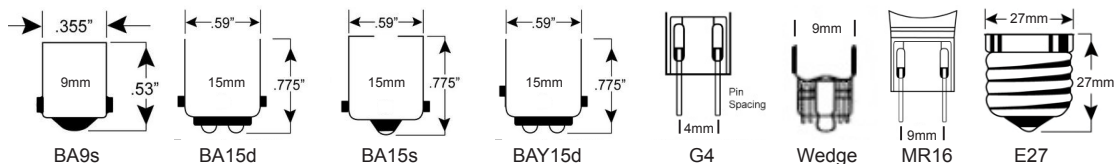




























**BASE GUIDE**





# LED Light Bulb Replacement Program

## Light Bulb Cross Reference Guide

OLD Style		LED Bulb Replacement Options	OLD Style	LED Bulb Replacement Options	
#68 - 8W #90 - 8W #94 - 13W #1004 - 12W #1076 - 21W #1142 - 18W #1176 - 17W #306 - 14W 24V #308 - 19W 24V #1204 - 19W 24V #1692 - 17W 24V	 BA15d 	<b>41080P</b> Warm White <b>41081P</b> Cool White 	#71 - 10W #78202 - 10W #72 - 10W 24V #78205 - 10W 24V 31mm 	<b>41100P</b> Warm White <b>41101P</b> Cool White 	
		<b>41086P</b> Warm White <b>41087P</b> Cool White 	#78203 - 5W #78204 - 5W 24V 37mm 	<b>41102P</b> Warm White <b>41103P</b> Cool White 	
		<b>41090P</b> Warm White 	42mm 	<b>41104P</b> Warm White <b>41105P</b> Cool White 	<b>41106P</b> Warm White <b>41107P</b> Cool White 
#1034 - 23W #1157 - 27W	 BAY15d	<b>41082P</b> Warm White <b>41083P</b> Cool White 	#69 - 10W #70 - 10W #70-1 - 10W #211-2 - 15W #212-2 - 10W #78206 - 10W #67-1 - 10W 24V #78207 - 10W 24V 	<b>41110P</b> Warm White <b>41111P</b> Cool White 	<b>41112P</b> Warm White <b>41113P</b> Cool White 
		<b>41088P</b> Warm White <b>41089P</b> Cool White 	MR-16 20 Watt Halogen 	<b>41008P</b> Warm White <b>41009P</b> Cool White 	
#93 - 13W #1003 - 12W #1073 - 21W #1141 - 18W #1156 - 27W	 BA15s	<b>41084P</b> Warm White 			
#53 - 2W #57 - 4W #67 - 8W #1816 - 4W #1895 - 4W	 BA9s	<b>41075P</b> Warm White  <b>12 Volt only</b> 	<b>41120P</b> 	<b>G4 Adapters</b> <b>41121P</b> 	<b>41122P</b> 

### G4 BI-PIN SOCKET ADAPTERS

Make your LED light bulb replacement a smooth transition with these three adapters. Replacing your halogen and incandescent bulbs just became easier.

- More Options
- Better Choices
- Smarter Solutions

The G4 Socket inside the BA15 Adapters (**41120P** & **41121P**) rotate up to 120° to provide the proper LED bulb orientation inside the light fixture. **ENDLESS COMBINATIONS!**



it swivels

### Two LED Colors in a single Flex-Strip



**41514P** 21" Length Blue-White  
**41515P** 21" Length Red-White  
**41516P** 48" Length Blue-White  
**41517P** 48" Length Red-White

- ◆ LED innovation when two colors are needed
- ◆ Power wires on both ends - connect for longer runs or cut for shorter lengths
- ◆ Two Color Combinations BLUE/COOL WHITE or RED/COOL WHITE
- ◆ Rated IP68 - install anywhere on the boat
- ◆ 12 Volts DC - very low current (amp) draw
- ◆ Requires a "double throw" switch (on/off/on)
- ◆ Can use optional Flex-Trak for mounting 14mm wide

### COLOR TEMPERATURE



WARM WHITE 2,800K - 3,200K



COOL WHITE 5,800K - 6,200K

Plastic channel for mounting 14mm wide Flex-Strips. Screw Flex-Trak to mounting surface then snap Flex-Strip into channel.

### FLEX-TRAK 41731

