



2025 LIGHTING CATALOG

LED Ceiling Lights

A2.5 Flush Mount 2.5" 4 COLOR LED Down Light

Scandvik's A2.5 LED Down Light with class leading output, sealed weatherproof construction and simple 2-wire installation is a favorite amongst boat builders. Intelligent circuitry allows color changing from White, Blue, Red, Green without specialized switches or controllers. Only a simple 2-position (on/off) toggle switch is needed. Switch light off and on again within 1.5 seconds to cycle through each of the four colors. Turning the light off for more than 1.5 seconds resets the light to White. This **316 Stainless Steel** fixture is suitable for overhead exterior locations such as T-tops, hard tops and mezzanines. Simple butterfly clips hold the A2.5 firmly in place.



#41416P A2.5 4-COLOR Down Light

- 286 Lumen (Daylight White 5500-6300K)
- 10-30 VDC
- IP67



A3 Flush Mount 3" LED Down Light

Scandvik's A3 LED Down Light is offered as single or bi-color lighting and can be dimmed when paired with the Tortuga PWM dimmer. A3 features a snap over bezel in Polished **316 Stainless Steel**, White or Black polycarbonate. A3 mounts securely overhead using just two flathead screws (included). Single color light are 2-wire (on/off) and bi-color are 3-wire (on/off/on). It is a good choice for general lighting on smaller boats or as under cabinet lighting for any size vessel. Other applications include hard tops, arches, walkway overhangs and shower stalls.




316 Stainless Steel Trim




White Plastic Trim



Black Plastic Trim

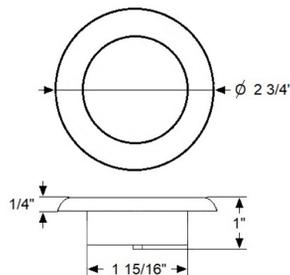

2-3/4" SS Trim

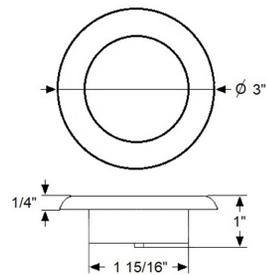

3" Plastic Trim

- 170 Lumen (Warm White 2900-3200K)
- 242 Lumen (Cool White 5500-6300K)
- 12 VDC
- IP67



Warm White

- #41368P Flush Mount, **316 Stainless Steel** Trim
- #41379P Flush Mount, White Trim
- #41393P Flush Mount, Black Trim
- #41300P Flush Mount packaged with SS, White & Black Trim

Cool White

- #41420P Flush Mount, **316 Stainless Steel** Trim
- #41421P Flush Mount, White Trim
- #41422P Flush Mount, Black Trim
- #41301P Flush Mount packaged with SS, White & Black Trim

Dual Color, Warm White with Blue Night Light

- #41376P Flush Mount, **316 Stainless Steel** Trim
- #41377P Flush Mount, White Trim
- #41394P Flush Mount, Black Trim
- #41302P Flush Mount packaged with SS, White & Black Trim

Dual Color, Warm White with Red Night Light

- #41386P Flush Mount, **316 Stainless Steel** Trim
- #41385P Flush Mount, White Trim
- #41395P Flush Mount, Black Trim
- #41303P Flush Mount packaged with SS, White & Black Trim

LED Ceiling Lights

A3 Surface Mount 3" LED Down Light



3" Plastic Trim

White Trim

- #41317P Surface Mount, Warm White
- #41423P Surface Mount, Cool White
- #41380P Surface Mount, White/Blue



2-3/4" SS Trim



316 Stainless Steel Trim Ring with Chromed Plastic Spacer

- #41373P Surface Mount, Warm White
- #41378P Surface Mount, Warm White with Blue
- #41387P Surface Mount, Warm White with Red

A3C Flush Mount LED Down Light

Scandvik's A3C LED Down Light is offered as a single or bi-color lighting and can be dimmed when paired with the Tortuga PWM dimmer. A3C features a snap over bezel in Polished **316 Stainless Steel**, White or Black polycarbonate. A3C mounts with 2 simple butterfly clips and/or two flat head screws. It is a good choice for general lighting in the headliner or as under cabinet lighting for any size vessel. Other applications include hard tops, arches, walkways, overhangs and shower stalls.




316 Stainless Steel Trim



White Plastic Trim



Black Plastic Trim

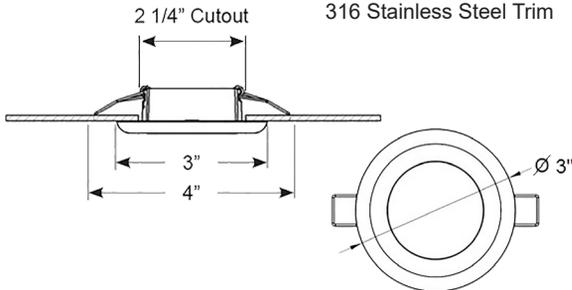


- 300 Lumen (Warm White 2900-3200K)
- 12 VDC
- IP67

- #41290P Warm White (stainless steel, white and black trim rings)
- #41291P Cool White (stainless steel, white and black trim rings)
- #41292P Warm White/Blue (stainless steel, white and black trim rings)
- #41293P Warm White/Red (stainless steel, white and black trim rings)

S3 Surface Mount 2-Color LED Down Light

Scandvik's S3 LED **slim (7/16" profile)** surface mount down light is offered as a bi-color (White/Blue) light. The S3 is a 3-wire fixture (on/off/on) and features a snap over bezel in Polished **316 Stainless Steel** or White polycarbonate. The light is secured with two mounting screws (included) and is designed for T-Tops and hard top applications. This light is not available in single color however it is often used as such by terminating the third leg.




Diameter:
2-7/8" - Stainless Steel Trim
2-3/4" - White trim



- #41670P Cool White/Blue - Stainless Steel Trim
- #41671P Warm White/Blue - Stainless Steel Trim
- #41672P Cool White/Blue - White Trim
- #41673P Warm White/Blue - White Trim



- 228 Lumen White / 48 Lumen Blue
- 10-30 VDC
- IP67



LED Ceiling Lights


B3 Surface Mount LED Down Light

Scandvik's B3 LED slim (3/8" profile) surface mount single color down light is manufactured to be simple and budget friendly. The SS polished snap over trim ring is a nice upgrade from the inferior chrome plastic bezels of the past. The fixture is popular as a T-Top light as it looks like a flush mount light without the hassle of cutting holes.



- 95 Lumen White / 13 Lumen Blue
- 10-30 VDC
- IP67

#41320P Cool White
#41321P Blue

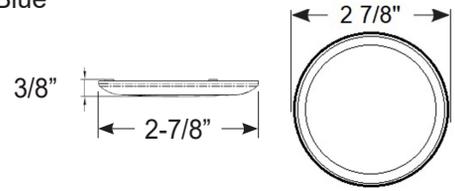

R3 Gimbal Recessed Mount LED Down Light

Scandvik's R3 LED Down Light is offered as a high power 3W single warm white (2850-3200K) or 4-color RGBW. The adjustable eyeball design with 15-degree tilt to highlight bars, galleys and artwork. Intelligent circuitry allows color changing from White, Blue, Red, Green without specialized switches or controllers. Only a simple 2-position toggle switch is needed (on/off). Switch light off and on again with 1.5 seconds to cycle through each of the four colors. Turning the light off for more than 1.5 seconds resets the light to White. Single color WW fixture is dimmable. Simple butterfly clips hold the R3 firmly in place.





- 70-80 Lumen Warm White (2850-3200K)
- 10-30 VDC
- IP65
- Mounting Hole: 2-5/8"
- Dimensions: 3-1/8" Dia. x 1-3/8" D

#41483P Warm White

- White (5500-6300K)
- 8-30 VDC
- IP65
- Mounting Hole: 2-5/8"
- Dimensions: 3-1/8" Dia. x 3/4" D

#41484P RGBW - 4 Color

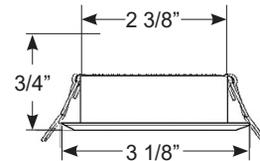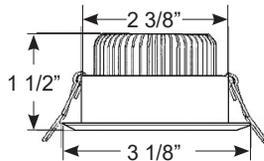


A4 LED Down Light



- 180 Lumens Warm White (4500K)
- 10-30 VDC
- IP67

#41369P 4" LED Warm White Ceiling Light
#41559P 4" LED 4-Color Ceiling Light
(Lumens W:204 G:137 B:31 R:30)

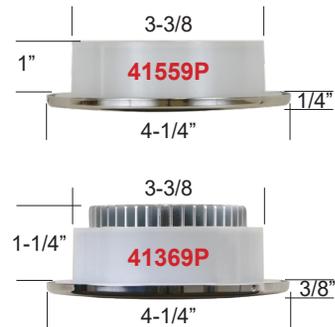


A6 LED Down Light



- 350 Lumens Warm White (4500K)
- 10-30 VDC
- IP67

#41370P 6" LED Warm White Ceiling Light
#41561P 6" LED 4-Color Ceiling Light
(Lumens W:264 G:180 B:38 R:44)

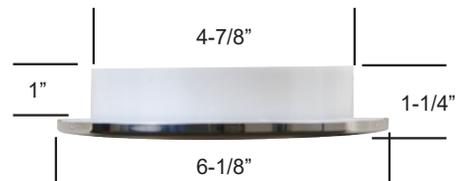

Surface Mount Ceiling / Dome Lights

LED Dual-Color Low-Profile Dome Light



- Lumens: White:320 / Blue:45
- 12/24 VDC, 6 W
- 30 LED Warm White (2900-3200K)
- 26 LED Blue
- Plastic housing
- Surface mount
- IP65
- Touch Switch
- Switch glows Blue




#41461P LED Warm White / Blue

- Lumens: White:320 / Red:60
- 12/24 VDC, 6 W
- 30 LED Warm White (2900-3200K)
- 26 LED Red
- Plastic housing
- Surface mount
- IP65
- Touch Switch
- Switch glows Blue



#41462P LED Warm White / Red

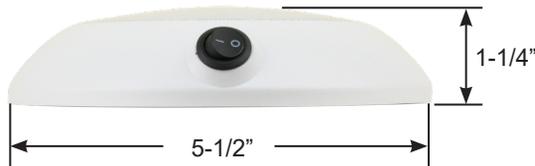

- 328 Effective Lumens
- 12 VDC, 4.4W
- Dimmable when connected to an external dimming module (steady volt, non PWM)
- 24 x 0.2 Watt 2835 LEDs
- Warm White (2900-3200K)
- Plastic housing with high impact plastic lens
- Surface Mount
- IP66

#41340P LED Ceiling Light with Switch



3/4" High

- 720 Effective Lumens
- 12/24 VDC
- 51 x 0.5 Watt 2835 LEDs
- Natural White (4500K)
- Plastic housing with high impact plastic lens
- Surface mount, 3 SS Screws Included
- IP67
- Three Stage Dimming Touch Switch
- Switch glows Blue

#41323P Dome Light with Touch Switch

LED Traditional SS Dome Light



- 229 Lumens
- 12 VDC, 1.7 W
- New LED version
- Stainless Steel
- Prismatic plastic lens
- Surface Mount
- 150 ° Beam Angle

- Side mounted on/off switch. Illuminated by 20 SMD 2835 warm white (4000K) LED's (compares with a 20 Watt Halogen bulb)

#41324P LED 5-1/2" Dia. x 1-1/2" High


#41325P LED 6-3/4" Dia. x 1-5/8" High

Surface Mount Lights

LED 7" Oval Dome Light with Touch Switch

#41322

- 680 Effective Lumens
- 12/24 VDC
- 42 x 0.5 Watt 2835 LEDs
- Natural White (4500K)
- Plastic housing with high impact plastic lens
- Surface mount, 2 SS Screws Included
- IP67
- Three Stage Dimming Touch Switch
- Switch glows Blue

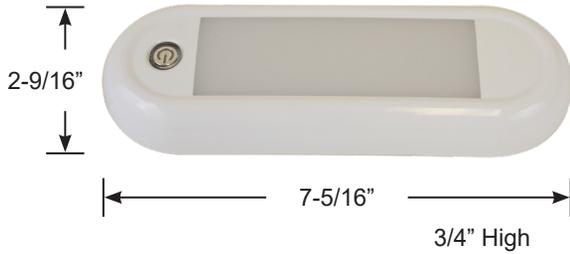

LED 6" Rail Light with Motion Switch

#41465

- 195 Effective Lumens
- 12/24V
- 22 x 0.2 Watt 2835 LEDs
- Color White
- Aluminum housing with high impact plastic lens
- Surface mount, 2 SS Screws included
- IP67
- Motion Switch (Light stays on 35 seconds after last movement)




#41472P Natural White Bunk Light

- Lumens: 515
- 10-30 VDC, 10.8 Watt
- Surface Mount
- 54 x 2835 Natural White LEDs
- Touch Switch
- IP67
- Dimensions: 11-7/8" L x 2-1/4" W x 1/2" D



LED 12" & 24" Rail Lights

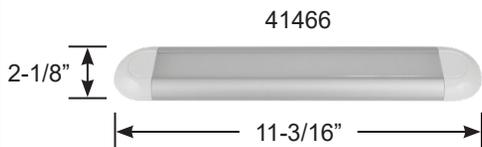

#41467 24"

- 820 Effective Lumens
- 118 x 0.2 Watt 2835 LEDs
- Other specifications the same as 12" rail light

#41466 12"

- 550 Effective Lumens
- 12/24 VDC
- 58 x 0.2 Watt 2835 LEDs
- Color White
- Aluminum housing with high impact plastic lens
- Surface mount, 2 SS Screws included
- IP67
- Without switch



Surface Mount Lights


#41364 LED Cabin Light with Switch

- 535 Lumen
- Dimmable when connected to an external dimming module
- 12/24 VDC, 9 Watt
- 32 x 0.5 Watt Samsung 5630 LEDs
- Warm White (3000K)
- Polycarbonate housing and diamond cut lens
- Surface Mount
- IP40 (for interior use)
- Dimensions: 13" L x 2-3/4" W x 7/8" H



#41480 Warm White & Blue Bunk Light

- Lumens: 760 (White), 123 (Blue)
- 10-30 VDC, 7.6 Watt
- Surface Mount
- LEDs: 33 White, 30 Blue
- Touch Switch
- IP67
- Dimensions: 10" L x 1-3/4" W x 1/2" D

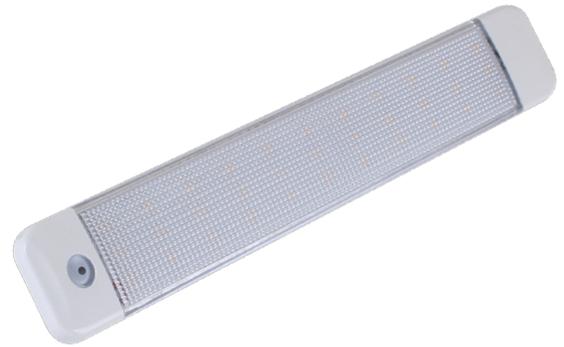

LED 6" & 12" RGBW+ COLOR CHANGE RAIL LIGHT




Scandvik's New 6" and 12" RGBW+ Color Change LED Rail Light with class leading output, sealed weatherproof construction is a favorite amongst Boatbuilders. Intelligent circuitry allows color changing without specialized switches or controllers. Simple 2-wire connections with any on/off switch is all that is required to cycle from White to Blue to Red to Green. Switch off for more than 4 seconds resets the color to white. Light also has a dynamic color-change fade setting in the last sequence that allows the light to cycle through a range of colors on its own.

For surface mount or T-top and Bimini top applications. Includes rail mounting brackets for 3/4" to 1-1/2" diameters

- IP65
- 10-30VDC
- 9 PCS RGBW LEDs (6")
- 24 PCS RGBW LEDs (12")
- Cool White, Blue, Red, Green, +Dynamic Color Change Mode
- Lumens W:147, G:136, B:25, R:68
- Extruded Aluminum Body

#41761P 6" RGBW & Fade
#41763P 12" RGBW & Fade

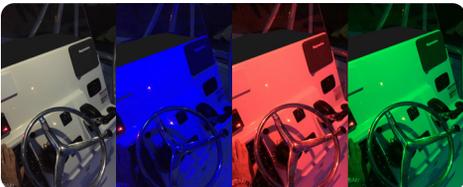

#41763P






#41181

Included Mounting Bracket allows mounting to aluminum t-top tubes



#41761P

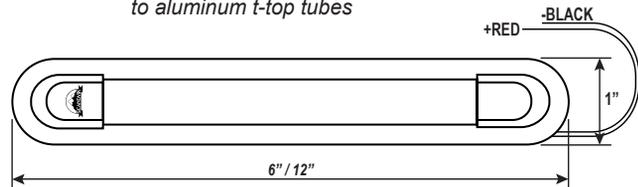


Cabin and Reading Lights



#19052P LED Polished Brass

- 154 Lumen
- 12/24 VDC, 3.1 Watt
- Adjustable swivel light
- On/off rocker switch
- 16 SMD 2835 Warm White (2900-3200K) LED
- 120° Beam Angle

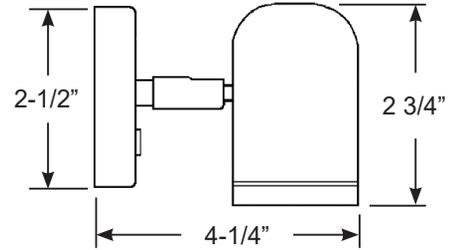


#19053P LED 304 Stainless Steel



#41365 LED Frosted Glass Shade

- 290 Lumen
- 12/24 VDC, 1.5 Watt
- Adjustable swivel light
- On/off rocker switch
- 304 Stainless Steel
- White frosted glass shade
- 0.12 A @ 12V, 0.06 A @ 24 V
- Warm White (2900-3200K) LED
- 340° Beam Angle

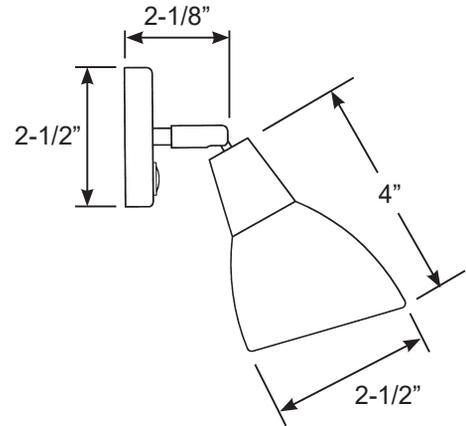


#41330 Halogen Chrome

- 12 Volt - 10 Watt G4 Halogen bulb
- Adjustable swivel light
- Chrome plated brass
- On/off rocker switch




#41366 LED Chrome

- 12/24 VDC
- Adjustable swivel light
- Chrome plated brass
- On/off rocker switch
- Dimmable

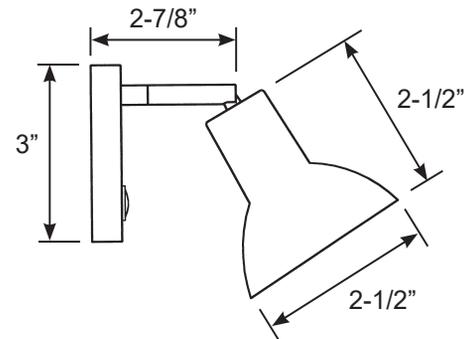


Cabin and Reading Lights

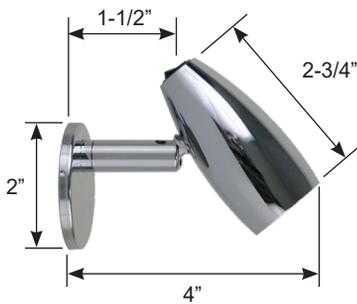

#41396P LED Micro Reading Light

- 120 Lumen
- Adjustable swivel light
- Chrome plated brass
- On/off rocker switch
- 12/24 VDC, 2.0 Watt
- 12 x 0.2 Watt LEDs
- Warm White (2,900-3,200K)
- Beam Angle 120°
- LED Lifetime: 50,000 hours

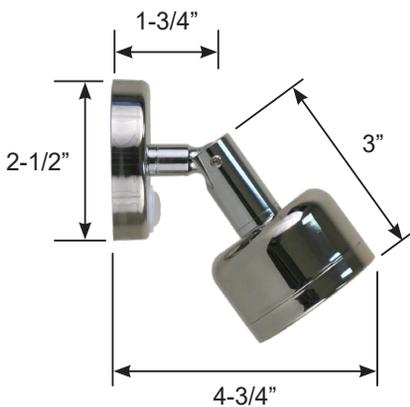

#41397P LED Allure Reading Light

- 140 - 160 Lumen
- Dimmable
- Adjustable swivel light
- 304 Stainless Steel
- On/off rocker switch
- 12/24 VDC, 3.1 Watt
- 1 x 3.0 Watt LED
- Warm White (2,850-3,200K)
- Beam Angle 110°
- LED Lifetime: 50,000 hours






Engine Room / Utility Lights



#41590P E-330 LED Compact Engine Room Light

- 727 Lumen
- 12/24 V, 10 Watt
- 33 x 0.5 Watt 2835 LEDs
- Cool White (5700-6300K)
- Polycarbonate Lens with plastic housing
- Beam Angle: 120°
- Surface Mount (wire can exit from bottom or end of fixture)
- IP67

MARINE
IGNITION
PROTECTED

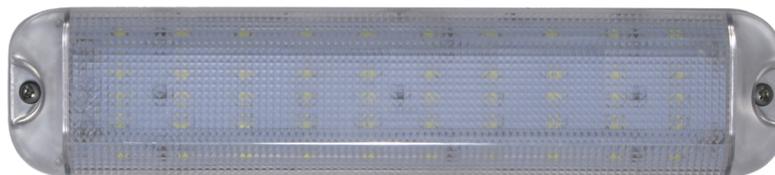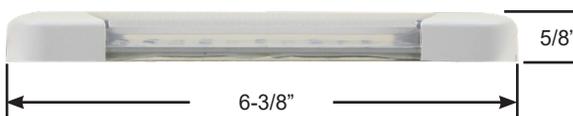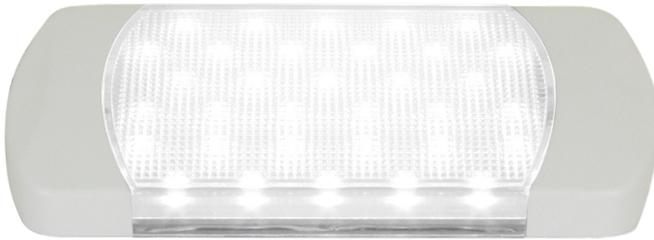

41389P



MARINE
IGNITION
PROTECTED




#41388P E-360

Lumen: 1,154
12 V, 13.2 Watt
LED Quantity: 36 (4 rows of 9 SMD2835 LEDs)

#41389P E-500

Lumen: 1,520
12/24 V, 18 Watt
LED Quantity: 50 (5 rows of 10 SMD2835 LEDs)

Protection: IP65
LED Type: SMD5630 Cool White (5,500K-6,300K)
Beam Angle: 120°
Surface Mount (hardware included)
Wire can exit from bottom or end of fixture
Dimensions: 13" L x 2-3/4" W x 1" H

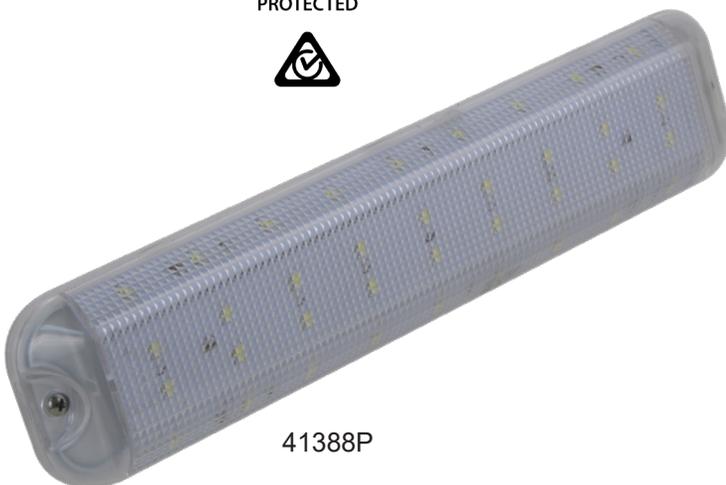

41388P

Engine Room / Utility Lights



#41593P E-1680 LED Engine Room / Utility Light

This super-bright, vibration resistant LED light meets the expectations of next generation vessels, refits or upgrades. The fixture can be powered by your DC battery system, AC generator/shore power or both. If connected to both, the PC board automatically switches to DC power, when AC power is lost. Meets the Requirements and Standards for SAE J1171. USCG. ABYC & NMMA. Includes trim ring for surface mount installation

168
SUPER
BRIGHT
LED'S



- 3400 Lumen (similar to 2 x T8 fluorescent)
- Flush or Surface Mount
- Single or dual voltage
- 30 Watt
- 168 Super-Bright 2835 LEDs
- Cool White (6000K)
- Beam Angle: 120°
- IP67
- Stainless Steel mounting hardware included
- 3-Year Warranty

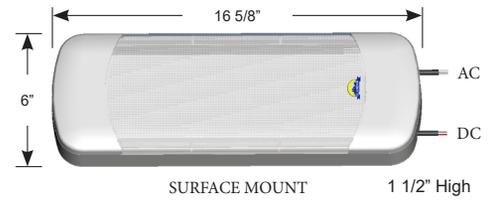

Bracket Mount LED Spreader / Deck Lights

Bracket Mount Spreader Light





Scandvik's LED Spreader Light is the perfect solution to illuminate your deck or cockpit. Featuring five, daylight white 3W LEDs providing 900 effective lumen output. A white Zytel® composite housing was designed specifically for the rigors of the marine environment. An adjustable stainless steel bracket mounting solution allows you to aim the light where it is needed most. Guaranteed against corrosion, discoloration and water intrusion. Three year Manufacturers Warranty.

- 900 Lumens
- 12/24 V, 12 Watt
- UV Resistant Polycarbonate housing
- Polycarbonate Lens
- IP67
- Comparable to a 120 Watt halogen bulb

#41440P White

#41441P Black

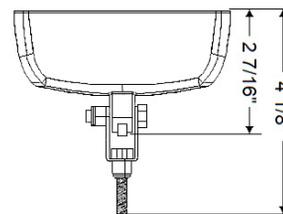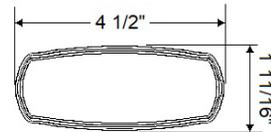

Lighting



Compact Size LED Spreader Light



- 610 Lumens
- 12/24 VDC, 5 Watt
- 3 x 3W LEDs
- UV Resistant Polycarbonate housing
- Polycarbonate Lens
- IP67
- Comparable to a 75W halogen bulb


#41445P White

#41446P Black



- High Quality Composition Frames
- 2 x 5 Watt Cree 3535 LEDs
- Polycarbonate Lens
- UV Resistant
- 500 Lumen
- IP68

#41435 Bracket Mount

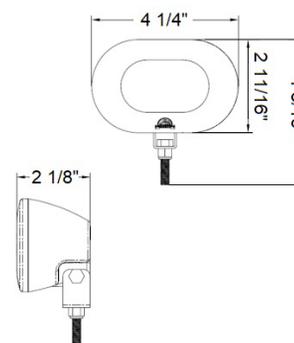



- High Quality Composition Frames
- 2 x 5 Watt Cree 3535 LEDs
- Hidden Mounting Screws
- Polycarbonate Lens
- UV Resistant
- 500 Lumen
- IP68

#41436 Flush Mount White


#41437 Flush Mount Black



Installation Video



Flush Mount LED Spreader / Deck Lights

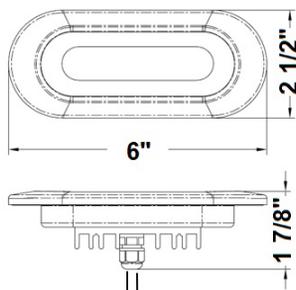

FLUSH MOUNT 5x3 WATT

- 900 Lumens
- 12/24 V, 12 Watt
- Polycarbonate Frame
- Polycarbonate Lens
- UV Resistant
- Hidden Mounting Screws
- Cool white LED color (5,500 - 6,300K)
- Temperature of LED: less than 158° with 77° ambient temperature



#41343 Flush Mount with White Trim


#41356 Flush Mount with Black Trim

- Five 3 Watt Samsung 3535 LEDs
- Equivalent to 120 Watt Halogen bulbs
- LED Lifetime: 50,000 Hours
- LED Beam angle: 110°
- 0.8 Amp draw at 12 Volt
- IP67
- Fits previous model cutout
- Dimensions: 6" W x 2-1/2" H x 1-3/4" D
- Cutout: 4-1/2" W x 1-1/2" H

#41201 White Trim Ring Only

#41202 Black Trim Ring Only

Flush Mount 3x5 Watt

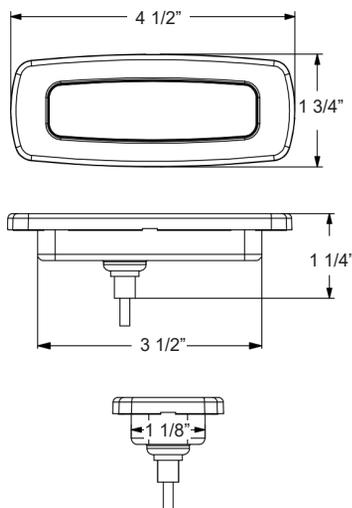


- 700 Lumens (equivalent to 100W halogen bulb)
- 12/24 Volt (10-30VDC), 6.0 Watt
- Flush Mount Spreader Light
- High Quality Composition Frame
- Polycarbonate Housing / UV Resistant
- Hidden Mounting Screws
- Daylight White LED (5500-6300K)
- 3 x 5 Watt Samsung 3535 LED's
- 125° Beam Angle
- 0.5 Amp Draw at 12 Volts
- IP68
- Dimensions: 4-1/2" L x 1-3/4" W x 1-1/4" D
- Cutout: 3-9/16" x 1-3/16"



#41450P White

#41451P Black

Oval LED Courtesy Light with Blue Light

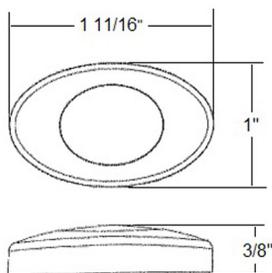

Small Size Surface Mount 2-LED Light with Polished 304 Stainless Steel trim. Suitable for interior or exterior installation. Stainless Steel mounting screws included.

- 5 Lumens
- 12 V - 0.4 W, 0.03 Amp
- IP67

#41460 304 Stainless Steel Trim



Cockpit Lights & Courtesy Lights



Single Color Cockpit Light

- Surface Mount
- Polycarbonate housing and lens
- 5 x 0.5 W Warm White LED
- 128 Lumens
- 12 V - 2 Watt
- IP-67



#41371P LED Cockpit Light



Single Color Cockpit Light

- Flush Mount
- Polycarbonate housing and lens
- 5 x 0.5 W Warm White LED
- 128 Lumens
- DC12V - 9 Watt
- IP-67



#41372P LED Cockpit Light



Dual Color Cockpit Light

- Flush Mount
- Polycarbonate housing and lens
- Auto switches from White to Blue
- 5 x 0.5 W Two Color LED - Cool White and Blue
- Cool White: 141 Lumens / Blue: 32 Lumen
- DC10-30V - 2.4 Watt
- IP-67




#41367P LED Cockpit Light



H-5 COB LED

LED Courtesy Lights features a **316 Stainless Steel** snap on trim ring

- Surface Mounted
- 12 V - 1.2 Watt
- 1pc COB LED for a more unified output (No Dotting)
- Warm White: 66 Lumen / Blue: 16 Lumen
- IP67

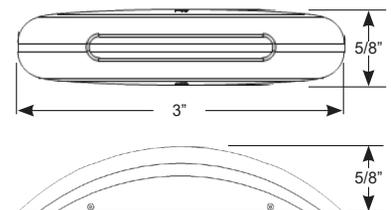

#41570P Warm White LED

#41571P Blue LED




Side Illumination



R-5 COB LED

LED Courtesy lights with polished **316 Stainless Steel** trim.

- 12 V - 0.4 W, 0.03 Amp
- 5 x TOP LEDs
- Surface Mounted
- IP67
- 2-5/8" W x 13/16" H x 1/2" D

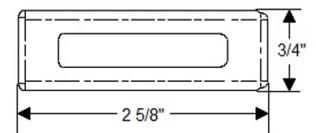

Down Illumination



#41381 Daylight White Side Illumination, 15 Lumen

#41382 Blue Side Illumination, 3.5 Lumen


#41383 Daylight White Down Illumination, 15 Lumen

#41384 Blue Down Illumination, 3.5 Lumen




Task and Locker Lights

O-5 COB LED

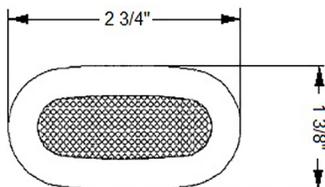

LED Surface Mount Courtesy Light. ABS housing with white or stainless steel snap on trim. 5 x 0.4 Watt white LEDs (4,500K) or 5 TOP blue LED's. LED beam angle is 120°. White is 15 lumens and blue is 2.8 lumens. 12 V, IP65. Dimensions 2-7/8" L x 1-1/2" W x 7/16" D.



- #41360 White LED with white trim
- #41339 Blue LED with white trim
- #41361 White LED with **316 Stainless Steel** trim
- #41362 Blue LED with **316 Stainless Steel** trim



Surface Mount LED Courtesy/Locker Light



Scandvik's LED Surface Mount Locker Light is offered in a touch switch or motion sensing design. The Touch version has a blue led backlit touch switch for easy nighttime location. The motion sensor switch version is triggered by temperature and movement (both of which are necessary to trigger the light within 6'). Lights feature a **316 Stainless Steel** Bezel and are designed for wet locations. Ideal for Hatch, Locker and Closet illumination. Mounting Hardware included.

Dimensions with Stainless Steel Trim: 4 5/16"L x 1-1/16"W x 1/2"H (11/16" for Motion Sensor)

- 210 Lumen (Warm White 2900-3200K)
- 10-30VDC
- IP67

- #41741P Warm White - Locker Light with Touch Switch, **316 Stainless Steel** Trim.
- #41743P Cool White - Locker Light with Touch Switch, **316 Stainless Steel** Trim.
- #41740P Warm White - Locker Light with Touch Switch without Stainless Steel Trim.
- #41742P Cool White - Locker Light with Touch Switch without Stainless Steel Trim.

- #41746P Warm White - Locker Light with Motion-Sensor Switch, **316 Stainless Steel** Trim.
- #41748P Cool White - Locker Light with Motion-Sensor Switch, **316 Stainless Steel** Trim.
- #41745P Warm White - Locker Light with Motion-Sensor Switch without Stainless Steel Trim
- #41747P Cool White - Locker Light with Motion-Sensor Switch without Stainless Steel Trim

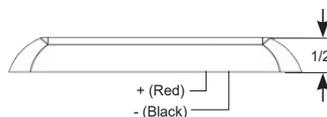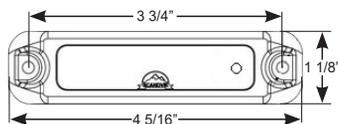

41741P




41746P

Surface Mount LED Courtesy/Locker Light

- 12VDC, 4" 1.2W, 8" 3W
- Polycarbonate Housing
- 2-Wire Connection
- 0.2W 2835 LED, 4" x 6, 8" x 15
- Daylight White 4500K
- Use with or without Included gasket
- Wires exit light in the middle of the back. Gasket has channel on back to route wires to the end of the light if needed.
- IP67
- Dimensions: 4" or 8" long (1/4" longer with gasket) x 5/8" wide (3/4" with gasket) x 1/2" high (5/8" with gasket)



- #41640 4" Daylight White 73 Lumens
- #41641 4" Blue 14 Lumens
- #41643 4" RGBW Lumens W:43 G:27 B:7 R:7
- #41644 8" Daylight White 176 Lumens
- #41645 8" Blue 23 Lumens
- #41647 8" RGBW Lumens W:107 G:67 B:17 R:17

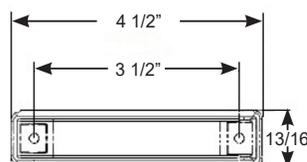


SCAN-STRIP 4 - Color RGBW LED




16" RGBW SCAN-STRIP (30 LED)



8" RGBW SCAN-STRIP (15 LED)




- RGBW LEDs
- Colors Daylight White (4000-4500K), Blue, Red, Green
- Lifespan 30,000 + Hours
- 120° Beam Angle
- 12/24 V (10-30VDC)
- Watts 8" = 1.2
- Watts 16" = 2.4
- Watts 20" = 3.1
- Lumens 8" White = 94
- Lumens 16" White = 180
- Lumens 20" White = 234
- IP65
- Ideal for under gunwale lighting
- SS Mounting Screws Included
- 8" (8-7/8" L x 7/8" W x 1/2" H)
- 16" (16" L x 7/8" W x 1/2" H)
- 20" (20" L x 7/8" W x 1/2" H)

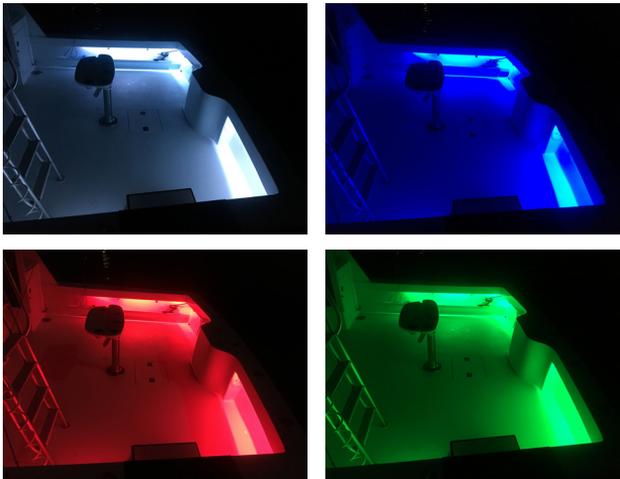


Scan-Strip 4-Color RGBW LED builds on the popularity of our original single color Scan-Strip LED. Simple 2-wire connections with any on/off switch is all that is required to cycle from White to Blue to Red to Green. Switch off for more than 4 seconds resets the color to white.


#41650

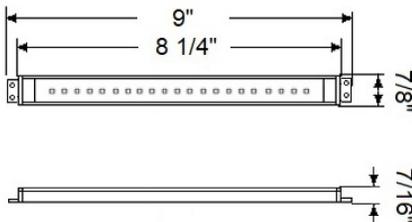

#41651

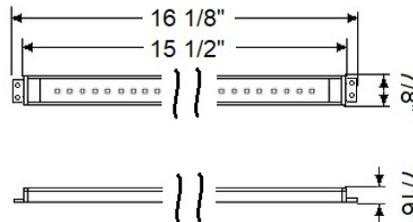

#41652

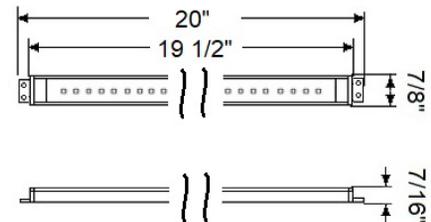

BULK PACKAGING

- #41650** 8" Scan-Strip 15 RGBW LEDs
- #41651** 16" Scan-Strip 30 RGBW LEDs
- #41652** 20" Scan-Strip 39 RGBW LEDs

RETAIL PACKAGING

- #41650P**
- #41651P**
- #41652P**

SCAN-STRIP LED



4" SCAN-STRIP (5 LED)




8" SCAN-STRIP (17 LED)



16" SCAN-STRIP (34 LED)



- NEW Super Bright 2835 LEDs
- Available in Cool White, Blue, Red and Green
- Lifespan 30,000 + Hours
- 120° Beam Angle
- 12 Volt
- IP65 Can be installed in engine rooms and exterior locations
- Ideal for under gunwale lighting
- SS Mounting Screws Included
- 4" (4" L x 7/8" W x 1/2" H)
- 8" (9" L x 7/8" W x 1/2" H)
- 16" (16-1/8" L x 7/8" W x 1/2" H)
- 36" (36" L x 7/8" W x 1/2" H)

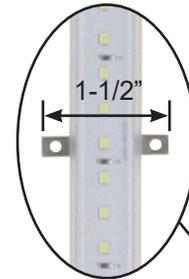


Middle support bracket

36" SCAN-STRIP (85 LED)


Lighting

Scan-Strip LED lighting is a quality product for marine or RV use. Mount them almost anywhere, under gunwales, in storage lockers, coolers, fish boxes, engine rooms. Use below deck in cabin areas for general lighting or courtesy lights.


#41354




#41346

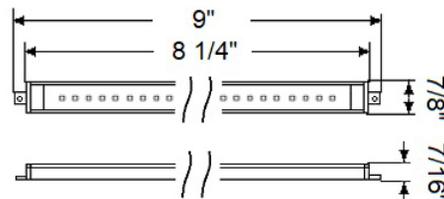

#41350

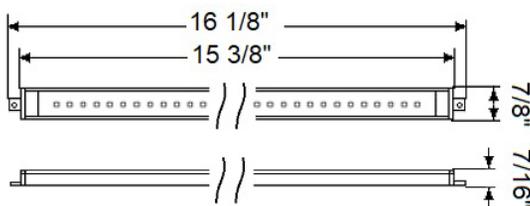

#41358

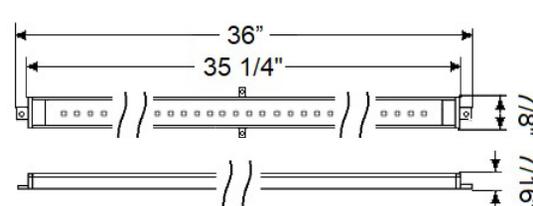

BULK PACKAGING

- #41354 4" Scan-Strip 5 White LEDs (56 Lumens)
- #41357 4" Scan-Strip 5 Blue LEDs (16 Lumens)
- #41346 8" Scan-Strip 17 White LEDs (256 Lumens)
- #41347 8" Scan-Strip 17 Blue LEDs (54 Lumens)
- #41350 16" Scan-Strip 34 White LEDs (400 Lumens)
- #41351 16" Scan-Strip 34 Blue LEDs (116 Lumens)
- #41358 36" Scan-Strip 85 White LEDs (957 Lumens)
- #41359 36" Scan-Strip 85 Blue LEDs (270 Lumens)

RETAIL PACKAGING

- #41354P
- #41357P
- #41346P
- #41347P
- #41350P
- #41351P
- #41358P
- #41359P

MARINE
IGNITION
PROTECTED



images are
not to scale

LED FLEX-STRIPS

12mm Wide Single



Thicker durable strip with no adhesive backing. 30 or 60 LED's per meter. 5-meter (16') reels wired at both ends, can be cut to custom lengths. 24 silicone mounting clips and 2 end caps included. *Dimmable with optional controller.


Part Number	Color	LED's per meter	Length	Width	Voltage	Dimmable	Protection
41510	Warm White	60	16' (5-meter)	12mm	12 V	Yes*	IP68
41511	Cool White	60	16' (5-meter)	12mm	12 V	Yes*	IP68
41520	Red	30	16' (5-meter)	12mm	12 V	Yes*	IP68
41521	Blue	30	16' (5-meter)	12mm	12 V	Yes*	IP68
41522	Green	30	16' (5-meter)	12mm	12 V	Yes*	IP68
41523	Blue	60	16' (5-meter)	12mm	12 V	Yes*	IP68

14mm Wide Dual Color

TWO COLORS IN ONE STRIP!

Strips can be cut on the cut-marks and sealed with silicone end caps and installed with silicone clips included. Strips can be wired together to make longer runs.

- Wired on both ends
- IP68
- SMD5050 LEDs
- 60 LED/meter
- Blue/Red or Cool White or both together
- 14mm wide
- Requires a double throw (on/off/on) switch

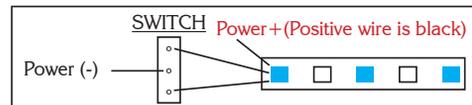

Short Length Kit
Retail Package



Part Number	Color	Length	Width	Voltage	Dimmable	Protection
41524	Blue-White	16' (5-meter)	14mm	12 V	Yes*	IP68
41525	Red-White	16' (5-meter)	14mm	12 V	Yes*	IP68
41514	Blue-White	21"	14mm	12 V	Yes*	IP68
41515	Red-White	21"	14mm	12 V	Yes*	IP68
41516	Blue-White	48"	14mm	12 V	Yes*	IP68
41517	Red-White	48"	14mm	12 V	Yes*	IP68

U-12 Underwater LED Light



- #41430P White
- #41431P Blue
- #41432P Green



Installation Video



Thru-Hull Surface Mount
Requires 3/8" (10mm) Hole

- Copolyester (PCTG) Lens Housing with **316 Stainless Steel** Trim
- 12 X SMD2835 (white & blue) Super Bright LEDs or 5mm High Flux green LEDs
- Lumens: 180 (White), 50 (Blue), 139 (Green)
- IP68
- 12 V
- White: 2.3 Watt, 0.2 Amp
- 120° Beam Angle provides intense illumination
- Mount with wire thru-hull or wire outside hull using included stand off mounting block
- 5' Cable / SS Screws Included
- Dimensions Thru-Hull Surface Mount:
3-3/8" W x 1-5/8" H x 7/8" D
- Dimensions Standoff Surface Mount:
3-3/8" W x 1-5/8" H x 1-1/4" D



Standoff Block
(Included)






Standoff Surface Mount
(Does not require hole through transom)

Lighting

#41599 LED RGBW 4-Color Controller

- Works with any RGBW LED Material
- Cycles through: White/Blue/Red/Green with any switch
- 4-Second Reset to White
- 12/24 V - 60 Watt
- IP67

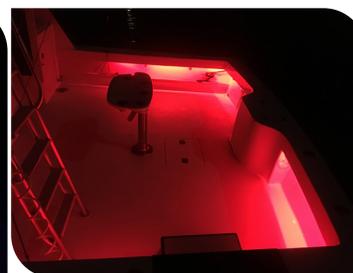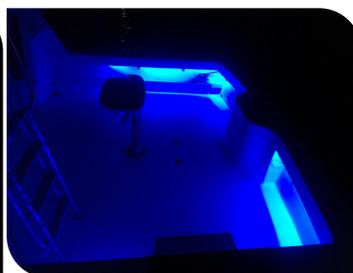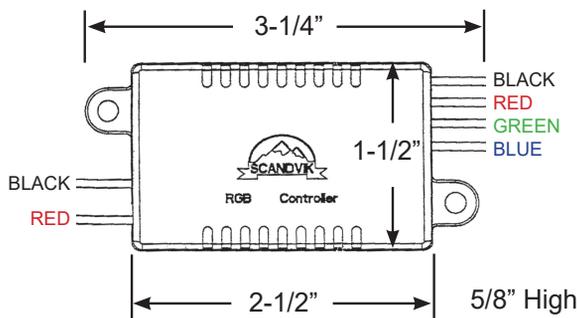




Dimmers



Wall Mount 12V Dimmer with IR Remote

- 12/24 VDC
- External Dimensions: L 34 1/2" x W 34 1/2" x H 1 5/8"
- Max Current: 16 Amp
- Working Temperature: -20-60 C°

#41607 Wall Mount 12V Dimmer with IR Remote

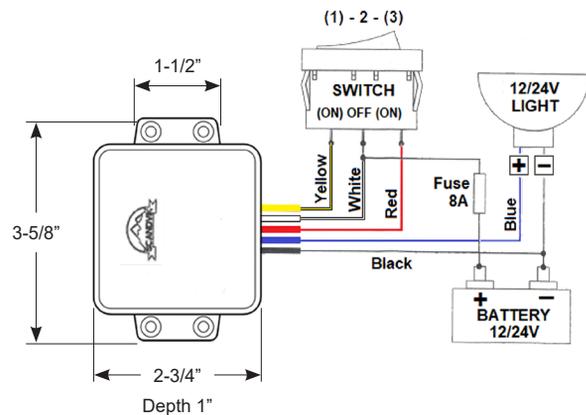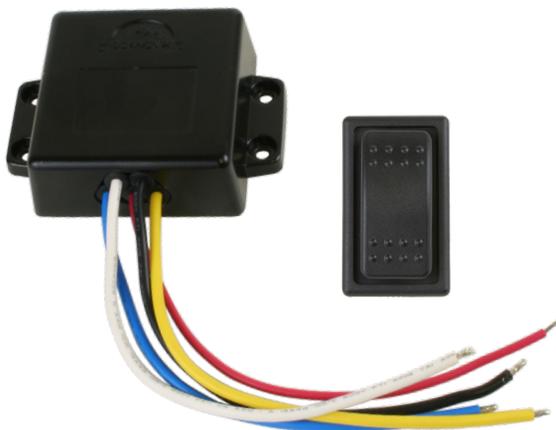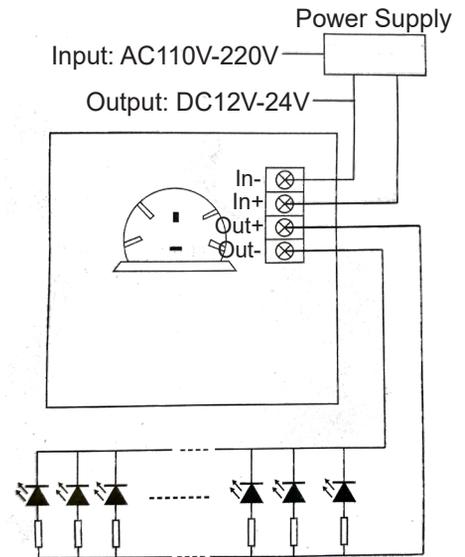

The **Tortuga Dimmer** is designed to easily adjust the interior or exterior light level from 0-100% output. Touch the “up” button to turn light on and touch the “down” button to turn light off.

Press and hold either up or down, on the included switch, to increase or decrease the light output level to your likeness. Release at any point to maintain the current brightness.

If you are leaving the boat, the Tortuga features an exit mode. Push the “down” button two times within 1.5 seconds, the light will flash twice, and turn off after 1 minute.

- IP66
- 10-30VDC
- Rated for 8A, 12V or 24V
- Includes Switch
- Die Cast Aluminum Housing
- Pulse Width Modulated to will work with LED, Incandescent or Halogen Lights

#41598P Tortuga Dimmer

Power Supplies



#41610 50 Watt

- Input: AC 100-255V, 0.4A
- Output: DC 12V, 4.16A
- Shipping Weight: 2 Lbs



#41611 80 Watt

- Input: AC 110V, 1.0A
- Output: DC 12V, 6.7A
- Shipping Weight: 2 Lbs



#41612 150 Watt

- Input: AC 100V, 1.6A
- Output: DC 12V, 12.5A
- Shipping Weight: 3 Lbs




#41613 250 Watt

- Input: AC 110 - 250V, 1.2A
- Output: DC 12V, 20A
- Shipping Weight: 3 Lbs

Lighting

RGB Accessories

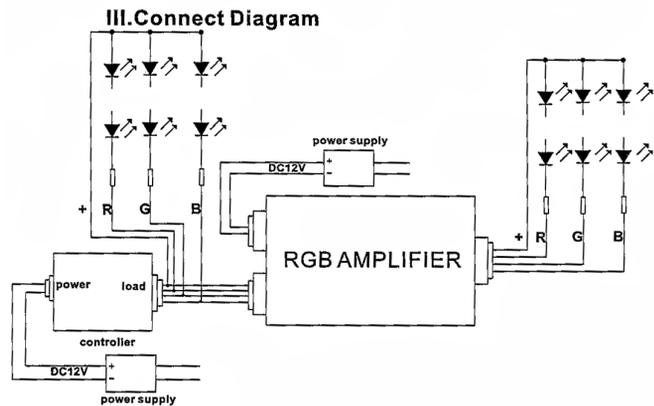

- Power: 12V - 4A per channel
- Supply Voltage: 12V - 24V DC
- Input & Output: RGBW channels
- Working Temperature: -4° - 140° F (-20° - 60° C)
- Dimensions: 95mm L x 52mm W x 30mm H
- Output: Three CMOS open - drain output
- Connecting Mode: Common anode
- Max output current: 4 A each color
- Weight: 110g

#41607 Weather Proof RGBW Power Amplifier

LED Replacement Bulbs

YOU HAVE

LED SOLUTION

MR16 LED
41008P Warm White
41009P Cool White
 Lumen: 290 WW
 Lumen: 320 CW

Volts: 12/24 VDC
 and 12 VAC
 Amps: 0.42 @12V
 0.21 @24V
 Watts: 5
 Beam Angle: 120°
 Dimmable: Yes

GU10 LED
41114P Warm White
41115P Cool White
 Lumen: 290 WW
 Lumen: 320 CW

Volts: 120VAC
 Amps: 0.1
 Watts: 5
 Beam Angle: 120°
 Dimmable: Yes







20 W Halogen

2"
1-1/2"
2"
2-3/16"

YOU HAVE

LED SOLUTION


G4 Wafer Side-Pin DUAL Color
 Volts: 12/24 VDC
 Lumen: 150 WW, 180 CW
 Amps: 0.14 @ 12V (White)
 Watts: 1.7 White, 0.5 Color
 Dimmable: Yes
41050P Warm White / Blue
41051P Warm White / Red
41052P Cool White / Blue
41053P Cool / Red




20 W Halogen

1-1/2"


G4 Wafer Back-Pin
 Volts: 12/24 VDC
 Lumen: 120 WW, 140 CW
 Amps: 0.12 @ 12V, 0.06 @24V
 Watts: 1.5
 Beam Angle: 120°
 Dimmable: Yes
41000P Warm White
41001P Cool White




10 W Halogen

7/8"


G4 Tower
 Volts: 12/24 VDC
 Lumen: 220 WW, 260 CW
 Amps: 0.21 @ 12V
 Watts: 2.5
 Beam Angle: 270°
 Dimmable: Yes
41070P Warm White
41071P Cool White




20 W Halogen

7/8"
1-3/8"
2-1/8"


G4 Wafer Back-Pin
 Volts: 12/24 VDC
 Lumen: 170 WW, 190 CW
 Amps: 0.17 @ 12V, Watts: 2.0
 Beam Angle: 120°
 Dimmable: Yes
41010P Warm White
41011P Cool White




20 W Halogen

1-3/16"

G4 Halogen Look-Alike LED: 1 COB (WW,CW) ★
 Volts: 12/24 VDC
 Lumen: 200 WW 3000K, 210 CW 6000K
 Amps: 0.12 @ 12V
 Watts: 1.5
 Beam Angle: 320°
 Dimmable: No
41072P Warm White
41073P Cool White
41038P Blue 24 SMD3014 Beam Angle: 330°




20 W Halogen

7/16"
1-1/8"
1-3/8"
Blue

G4 Wafer Side-Pin
 Volts: 12/24 VDC
 Lumen: 120 WW, 140 CW
 Amps: 0.12 @ 12V
 Watts: 1.5 White, 1.0 Color
41020P Warm White
41021P Cool White
41022P Blue
41023P Red




10 W Halogen

7/8"
7/8"
WW / CW Blue / Red
Dimmable: Yes


Mini-Bayonet, Mini-Tower LED: 24 SMD3014 Parallel Pins - Single Contact
 Volts: 12/24 VDC
 Base: BA9s
 Lumen: 120
 Amps: 0.12 @ 12V
 Watts: 1.5 Beam Angle: 330°
 Dimmable: No
41075P Warm White 3000K




53 or 57

7/16"
11/16"
1-1/4"

G4 Wafer Side-Pin
 Volts: 12/24 VDC
 Lumen: 170 WW, 190 CW
 Amps: 0.17 @ 12V
 Watts: 2.0
41030P Warm White
41031P Cool White
41032P Blue
41033P Red




20 W Halogen

1-3/16"
1-3/16"
WW / CW Blue / Red
Dimmable: Yes

Bayonet Mini-Tower
 Volts: 12/24 VDC
 Base: BA15s
 Lumen: 170
 Amps: 0.16 @ 12V
 Watts: 1.9
 Beam Angle: 270°
 Dimmable: No
41034P Warm White




10W Halogen

5/8"
3/4"
1-1/2"

G4 Wafer Side-Pin
 Volts: 12/24 VDC
 Lumen: 270 WW, 310 CW
 Amps: 0.25 @ 12V
 Watts: 3.0
 Beam Angle: 120°
 Dimmable: Yes
41040P Warm White
41041P Cool White




20 W Halogen

1-3/8"

Bayonet Tower LED: SMD Parallel Pins - Dual Contacts
 Volts: 12/24 VDC
 Base: BA15d
 Lumen: 220 WW 3000K, 220 CW 6000K
 Amps: 0.21 @ 12V
 Watts: 2.5 Beam Angle: 350°
 Dimmable: No
41080P Warm White
41081P Cool White




1142 or 1176

5/8"
1-1/16"
1-13/16"

Bayonet Tower LED: SMD Offset Pins - Dual Contacts
 Volts: 12/24 VDC
 Base: BAY15d
 Lumen: 220 WW 3000K, 220 CW 6000K
 Amps: 0.21 @ 12V
 Watts: 2.5 Beam Angle: 350°
 Dimmable: No
41082P Warm White
41083P Cool White




1157

5/8"
1-1/16"
1-13/16"

Wedge Base LED: 1 COB (WW) ★
 Volts: 12/24 VDC
 Base: T10 Wedge
 Lumen: 200
 Amps: 0.13 @ 12V Beam Angle: 320°
 Watts: 1.5
 Dimmable: No
41097P Warm White 3000K
41039P Blue 24 SMD3014 Beam Angle: 330° ★




168, 194, 906

7/16"
1-3/8"
1-5/8"
3/8"
Blue

LED Replacement Bulbs

YOU HAVE

LED SOLUTION

YOU HAVE

LED SOLUTION

Bayonet Compact-Tower LED: SMD Parallel Pins - Single Contact
Volts: 12/24 VDC
Base: BA15s
Lumen: 220 WW 3000K, 220 CW 6000K
Amps: 0.21 @ 12V
Watts: 2.5 Beam Angle: 350°
Dimmable: No
41084P Warm White
41085P Cool White

Festoon 360°
Base: 30mm Festoon
Lumen: 115
Volts: 12 VDC ONLY
Amps: 0.1
Watts: 1.2
Beam Angle: 360°
Dimmable: No
41035P Warm White

Bayonet Base Wafer Parallel Pins - Dual Contacts
Volts: 12/24 VDC
Base: BA15d
Lumen: 55 WW, 65 CW
Amps: 0.06 @ 12V
Watts: 0.7
Dimmable: No
41086P Warm White
41087P Cool White

Festoon Wafer
Volts: 12/24 VDC
Base: 31mm Festoon
Lumen: 45 WW, 65 CW
Amps: 0.06 @ 12V
Watts: 0.7
Dimmable: No
41100P Warm White
41101P Cool White

Bayonet Base Wafer Offset Pins - Dual Contacts
Volts: 12/24 VDC
Base: BAY15d
Lumen: 55 WW, 65 CW
Amps: 0.06 @ 12V
Watts: 0.7
Dimmable: No
41088P Warm White
41089P Cool White

Festoon Wafer 37/42mm
Volts: 12/24 VDC
Base: 37mm and 42mm Festoon
Lumen: 75 WW, 90 CW
Amps: 0.10 @ 12V, Watts: 1.2
Dimmable: No
41102P 37mm Warm White
41103P 37mm Cool White
41104P 42mm Warm White
41105P 42mm Cool White

Bayonet Base Mini-Tower Parallel Pins - Dual Contacts
Volts: 12/24 VDC
Base: BA15d
Lumen: 170
Amps: 0.16 @ 12V
Watts: 1.9
Beam Angle: 270°
Dimmable: No
41090P Warm White

Festoon Wafer
Volts: 12/24 VDC
Base: 42mm Festoon
Lumen: 140 WW, 160 CW
Amps: 0.17 @ 12V
Watts: 2.0
Dimmable: No
41106P Warm White
41107P Cool White

Wedge Base Tower
Volts: 12/24 VDC
Base: T10 Wedge
Lumen: 220
Amps: 0.21 @ 12V
Watts: 2.5
Beam Angle: 270°
Dimmable: Yes
41092P Warm White

360° Nav. Festoon
Volts: 12/24 VDC
Base: 42mm Festoon
Lumen: 175 WW, 210 CW
Amps: 0.21 @ 12V
Watts: 2.5
Dimmable: Yes
41110P Warm White
41111P Cool White

Wedge Base Mini-Tower
Volts: 12 VDC ONLY
Base: T10 Wedge
Lumen: 75
Amps: 0.06
Watts: 0.8
Dimmable: No
41095P Warm White

360° Nav. Barrel
Volts: 12/24 VDC
Base: 43mm Barrel
Lumen: 175 WW, 210 CW
Amps: 0.21 @ 12V
Watts: 2.5
Dimmable: Yes
41112P Warm White
41113P Cool White

A15 Style Bulb
Volts: 12/24 VDC
Base: E27
Lumen: 270
Amps: 0.25 @ 12V
Watts: 3.0
Beam Angle: 150°
Dimmable: No
41036P Warm White

A19 Style Bulb
Volts: 12/24 VDC
Base: E27
Lumen: 450
Amps: 0.46 @ 12V
Watts: 5.5
Beam Angle: 120°
Dimmable: No
41037P Warm White

G4 Base Adapters

BA15d to G4
 Swivels up to 120°
41120P

BA15s to G4
 Swivels up to 120°
41121P

E27 to G4
 Standard Household Edison Socket
41122P

Retail LED Replacement Bulb/Strip Displays

#41140 Small Display Bulbs/Strips

#41144 Small Display Bulbs Only

Overall Dimensions: 30"H x 11"W x 10"D

Lighting



41140 Qty.	41144 Qty.	SKU	Description
	1	41000P	G4 Back-Pin Wafer 9 LEDs WW
1	1	41010P	G4 Back-Pin Wafer 12 LEDs WW
1	1	41020P	G4 Side-Pin Wafer 9 LEDs WW
1	1	41030P	G4 Side-Pin Wafer 12 LEDs WW
1	1	41032P	G4 Side-Pin Wafer 10 LEDs BLUE
1		41033P	G4 Side-Pin Wafer 10 LEDs RED
1	1	41040P	G4 Side-Pin Wafer 21 LEDs WW
	1	41052P	G4 Side-Pin Wafer 12/3 LEDs COOL WHITE/BLUE
1	1	41070P	G4 Bottom-Pin Compact Tower 18 LEDs WW
1	1	41072P	G4 Bottom-Pin LED WW
	1	41075P	BA9s Mini Tower 5 LEDs WW
	1	41080P	BA15d Tower 18 LEDs WW
	1	41082P	BAY15d Tower 18 LEDs WW
	1	41084P	BA15s Tower 18 LEDs WW
	1	41086P	BA15d Wafer 4 LEDs WW
	1	41090P	BA15d Mini Tower 8 LEDs WW
	1	41095P	T10 Wedge Mini Tower 5 LEDs WW
1	1	41097P	T10 Wedge LED Optic Lens WW
	1	41100P	31mm Festoon 4 LEDs WW
	1	41102P	37mm Festoon 6 LEDs WW
	1	41104P	42mm Festoon 6 LEDs WW
1	1	41106P	42mm Festoon 9 LEDs WW
1	1	41120P	Adapter: BA15d to G4
1	1	41121P	Adapter: BA15s to G4
	1	41122P	Adapter: E27 to G4
1		41346P	8" Scan-Strip WHITE
1		41347P	8" Scan-Strip BLUE
1		41514P	21" DUAL Color COOL WHITE/BLUE
1		41515P	21" DUAL Color COOL WHITE/RED



Retail LED Replacement Bulb/Strip Displays

- #41141** Large Display Bulbs/Strips
- #41142** Full Large Display Bulbs/Strips
- #41145** Large Display Bulbs Only
- #41146** Full Large Display Bulbs Only

Overall Dimensions: 32"H x 14"W x 10"D

41141	41142	41145	41146	SKU	Description
2	4	4	8	41000P	G4 Back-Pin Wafer 9 LEDs WW
2	2	4	6	41008P	MR16 5 Watt LEDs WW
2	4	4	8	41010P	G4 Back-Pin Wafer 12 LEDs WW
2	5	4	10	41020P	G4 Side-Pin Wafer 9 LEDs WW
4	10	4	10	41030P	G4 Side-Pin Wafer 12 LEDs WW
2	5	2	5	41032P	G4 Side-Pin Wafer 10 LEDs BLUE
2	5	2	5	41033P	G4 Side-Pin Wafer 10 LEDs RED
4	10	4	10	41040P	G4 Side-Pin Wafer 21 LEDs WW
2	5	2	5	41052P	G4 Side-Pin Wafer 12/3 LEDs COOL WHITE/BLUE
2	3	2	4	41070P	G4 Bottom-Pin Compact Tower 18 LEDs WW
2	5	4	10	41072P	G4 Bottom-Pin LED WW
2	5	2	5	41075P	BA9s Mini Tower 5 LEDs WW
2	3	2	4	41080P	BA15d Tower 18 LEDs WW
2	3	2	4	41082P	BAY15d Tower 18 LEDs WW
2	3	2	4	41084P	BA15s Tower 18 LEDs WW
		2	5	41086P	BA15d Wafer 4 LEDs WW
		2	5	41088P	BAY15d Wafer 4 LEDs WW
2	5	4	10	41090P	BA15d Mini Tower 8 LEDs WW
2	3	2	4	41092P	T10 Wedge Compact Tower 18 LEDs WW
2	5	2	5	41095P	T10 Wedge Tower 5 LEDs WW
2	5	2	5	41097P	T10 Wedge LED Optic Lens WW
		4	10	41100P	31mm Festoon 4 LEDs WW
		2	5	41102P	37mm Festoon 6 LEDs WW
		2	5	41104P	42mm Festoon 6 LEDs WW
2	5	4	10	41106P	42mm Festoon 9 LEDs WW
4	10	4	10	41120P	Adapter: BA15d to G4
2	5	2	5	41121P	Adapter: BA15s to G4
2	3	2	4	41122P	Adapter: E27 to G4
2	4			41346P	8" Scan-Strip WHITE
2	4			41347P	8" Scan-Strip BLUE
2	4			41350P	16" Scan-Strip WHITE
2	4			41351P	16" Scan-Strip BLUE



Lighting



#13001
23" x 17" Padded counter mat displaying the LED light bulb replacement program. Both original incandescent and replacement LED bulbs are displayed in actual size.



**Scandvik, Inc.
423 4th Place SW
Vero Beach, FL 32962**

**1-800-535-6009
www.scandvik.com**