



Quality is Our Tradition

[www.scandvik.com](http://www.scandvik.com)

Volume No. 22



# Table of Contents



**Plumbing**

**11**



**Hose Clamps**

**110**



**Lighting**

**121**



**Dolphin Chargers**

**146**



**Pedestals**

**159**



**Struts**

**174**



**Teak Wonder**

**181**

**Index**

**184**

# WHAT'S NEW!



**316 Stainless Steel** Faucets & Taps  
Page: 54, 56, 58, 60, 66

**Piato** Folding Ceramic Family Faucet  
Page: 82



**Nordic Family** double bend, folding spout mixer.  
Page: 79



**Sable Family.** New matte black finish.  
Page: 29, 43, 48, 70



**Stainless Steel Sinks** Satin, Brushed, and Mirror Finish Round and Square Sinks  
Page: 96 -105

**Nordic Stainless Steel** Brushed single lever folding mixer with double bend  
Page: 77



**Shower Stub**  
304 Stainless Steel, Brushed Finish  
Page: 35



Anodized Aluminum

Stainless Steel

**Elka Recessed POP-UP Shower** with built-in control valve for on/off  
Page: 18



**Nordic Stainless Steel Shower Mixer** Improved design with mounting bolt for bulkhead fixture.  
Page: 46



**LED 6" & 12" RGBW+ Color Change Rail Light**  
Page: 127



**316 Stainless Steel H-5 LED Courtesy Lights**  
Page: 134



**316 Stainless Steel LED Surface Mount Locker Light**  
Page: 135



**Three-Stage 6" Electric Table Pedestals**  
Page: 161



**PRO Evo3 Series 4 Bank Battery Charger**  
Page: 150-151



**PROLITE 12v 15Amp 2 Bank & 25Amp 3 Bank Chargers**  
Page: 146-147

# Faucet Families

Plumbing

## Acrylic Family



10056 Pg 75    10401 Pg 41    10406 Pg 30    10770 Pg 30

## Classic Family



70000 Pg 75    70001 Pg 74    70002 Pg 62

Hose Clamps

## Folding Ceramic Family



14090 Pg 83    14084 Pg 39    10183 Pg 83    10180 Pg 79    10620 Pg 83    10467 Pg 41    10476 Pg 79    10665 Pg 79    10622 Pg 79

Lighting



14413 Pg 53    14411 Pg 53    14406 Pg 53    14087 Pg 30

Dolphin Chargers

## Geometric Family



16007 Pg 67    16000 Pg 77    16050 Pg 42    70502 Pg 64    16250 Pg 68    70357 Pg 84    70361 Pg 85    70358 Pg 85



70360 Pg 84    70604 Pg 48

Pedestals

## Minimalistic Family



07008 Pg 69    14420 Pg 72    16200 Pg 68    14421 Pg 58    14423 Pg 54    16216 Pg 50    14417 Pg 51    14410 Pg 51



14414 Pg 51    16002 Pg 57    16205 Pg 45    16201 Pg 44    07023 Pg 56

Struts

## Nordic Family



07032 Pg 56    70106 Pg 76    70103 Pg 71    70108 Pg 67    70104 Pg 57    70105 Pg 43    10502 Pg 43    70101 Pg 26    70102 Pg 26


Teak Wonder

## Faucet Families

### Nordic Stainless Steel Family




### Otto Family

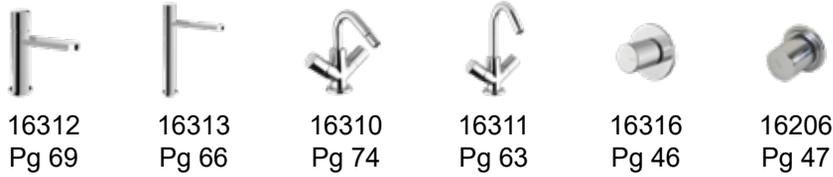

### Recessed Showers & Mixers



### Shower Accessories

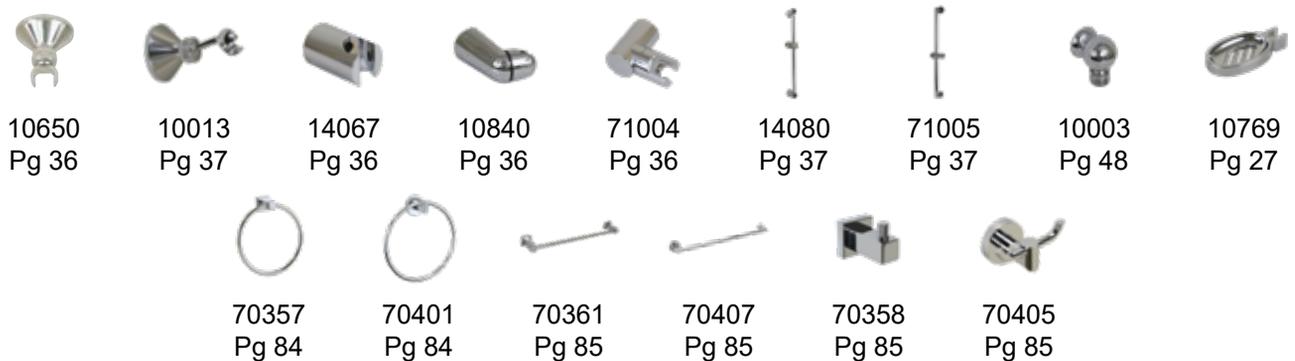

### Shower Boxes



## Faucet Families

### Shower Heads



07014  
Pg 35



16100  
Pg 34



16110  
Pg 34



74150  
Pg 35



74151  
Pg 35



16105  
Pg 34



16103  
Pg 34



74153  
Pg 35

### Shower Systems



10763  
Pg 27



14112  
Pg 30



10761  
Pg 27



70350  
Pg 26



70101  
Pg 26



70102  
Pg 26



14087  
Pg 30



70603  
Pg 26



16114  
Pg 32



15948  
Pg 25



74180  
Pg 25

### Single Lever Family



07006  
Pg 67



10485  
Pg 71



10480  
Pg 61



10488  
Pg 61



10881  
Pg 55



10880  
Pg 55



10871  
Pg 55



10637  
Pg 57



10466  
Pg 44



10479  
Pg 41



10487  
Pg 42

### Single Lever Family - Compact



10811  
Pg 78



10810  
Pg 78



10812  
Pg 78



10813  
Pg 41



10500  
Pg 42

### Single Lever Family - Shorty



16202  
Pg 64



16212  
Pg 60



10623  
Pg 42



10624  
Pg 42



14400  
Pg 78

## Faucet Families

### Slant Family



07036  
Pg 31

07037  
Pg 42

07039  
Pg 47

16217  
Pg 48

### Specialty Family



16204  
Pg 39

### Farley Family



16290  
Pg 60

16295  
Pg 73

16298  
Pg 28

16300  
Pg 47

16302  
Pg 85

16303  
Pg 85

16301  
Pg 85

### Sable Family



45100  
Pg 70

45120  
Pg 43

45125  
Pg 29

45130  
Pg 48

### 316 Stainless Steel Family



16605  
Pg 73

16606  
Pg 66

16610  
Pg 58

16615  
Pg 54

16616  
Pg 56

16620  
Pg 60

16622  
Pg 58

### Standard Family



10091  
Pg 39

10050  
Pg 75

10172  
Pg 75

10169  
Pg 75

10410  
Pg 53

10422  
Pg 62

10438  
Pg 62

46009  
Pg 52



46000  
Pg 52

46013  
Pg 49

46006  
Pg 49

14140  
Pg 30

10411  
Pg 41

### T Handle Family



10617  
Pg 42

10856  
Pg 39

# Faucet Families

## Triangular Family



14070  
Pg 21



10187  
Pg 38



10089  
Pg 75



10062  
Pg 30



10760  
Pg 75



10618  
Pg 75



14371  
Pg 74



10897  
Pg 62



46030  
Pg 50



46033  
Pg 50



46024  
Pg 52



46020  
Pg 49



14112  
Pg 30



10405  
Pg 30



16135  
Pg 18



16340  
Pg 18

## Washdowns



14070  
Pg 21



10186  
Pg 38



10187  
Pg 38



10175  
Pg 38

## Yo Family



70603  
Pg 20



70600  
Pg 52



70601  
Pg 41



70602  
Pg 32



70604  
Pg 48

## Zen Family



16210  
Pg 69



16211  
Pg 69

Plumbing

Hose Clamps

Lighting

Dolphin Chargers

Pedestals

Struts

Teak Wonder

# Stainless Steel Recessed Transom Showers

**PASSIVATED 316 STAINLESS STEEL** recessed shower cap with composite cup mounts vertically or horizontally. Ideal as a deck or transom shower.

**Water Connection:** 3/8" BSP-F threaded fitting on hose (except #12156, #12158, #12159 & #12161 ). 3/8" to 1/2" adapter available (#10961 Delrin) or optional hoses with 1/2" NPS-F supply end fitting.

**Mounting Hole:** 2-3/4" diameter

**Shipping Weight:** 4 lbs.



**#12114** Optional Mesh Bag to keep hose contained. Includes mounting clamp.


**Push-Button** sprayer, chrome plated brass head with black or white ABS handle with attached lanyard for easy pull-out. Mounting hardware included.



- #12124** Black with 6' black nylon hose
- #12128** Black with 6' chrome flex hose
- #12130** Black with 10' black nylon hose



- #12131** White with 6' white nylon hose
- #12146** White with 6' chrome flex hose
- #12147** White with 10' white nylon hose
- #12158** White with 6' Stainless Steel hose with 1/2" NPS-F fitting
- #12164** White with 6' Stainless Steel hose with 1/2" NPS-F fitting and mesh bag to retain hose

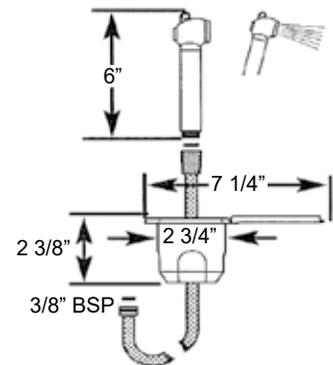


**Euro Style ABS sprayer**, chrome or white. Convenient on/off trigger locks in the "on" position for continuous water flow. Mounting hardware included.



- #12125** Chrome handle, black cup with 6' black nylon hose
- #12148** Chrome handle, black cup with 6' chrome flex hose
- #12149** Chrome handle, black cup with 10' black nylon hose
- #12159** Chrome handle, black cup with 6' SS hose with 1/2" NPS-F water connection
- #12162** Black handle, black cup with 6' black nylon hose

- #12133** White handle, white cup with 6' white nylon hose
- #12150** White handle, white cup with 6' chrome flex hose
- #12156** White handle, white cup with 6' SS hose with 1/2" NPS-F water connection
- #12157** White handle, white cup with 10' white nylon hose
- #12161** Chrome handle, white cup with 6' SS hose with 1/2" NPS-F water connection

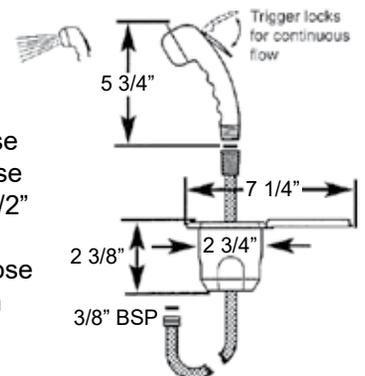

## Stainless Steel Recessed Transom Shower Mixers

Stainless Steel Recessed Shower Mixers. Can be used with one of our shower handle and hose combinations for vertical or horizontal installations. Manufactured from passivated **316 Stainless Steel**, our new cap design for our recessed showers will add a touch of elegance to your boat. The friction lock hinge holds the cap open. Mounting hardware included.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings. 3/8" BSP-M connection to shower hose

**Material:** **316 Stainless Steel** Cap with chrome plated brass mixers and composite cup

**Mounting Hole:** 2-3/4"

**Shipping Weight:** 5 lbs.



12127

12134

**Shower T-Handle Mixer** for water temperature and flow control or cold water tap in a compact unit. Stainless Steel cap with composite cup.

**#12127** Black composite cup with mixer

**#12134** White composite cup with mixer

**Shower Mixer** with temperature control only. The mixer has no on/off.


**#12139** Black composite cup mixer w/o shutoff

**#12145** White composite cup mixer w/o shutoff



12139

12145

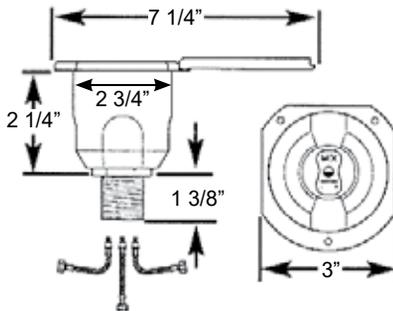

12101

Shower mixer with **COLD WATER** Shut off control only. This mixer has a Stainless Steel cap with composite cup.

**#12101** White composite cup with **COLD WATER** Shut Off

**#12095** White composite cup with 1/4 turn **COLD WATER** Shut Off



12095

# Stainless Steel Recessed Transom Showers

Recessed combination T-Handle mixer or cold water tap and pull-out shower handle for transom or deck mounting. The friction lock holds the cap open. Mounting hardware included.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Passivated **316 Stainless Steel** Cap, composite cups, chrome plated brass mixers, ABS and chrome plated brass spray handles and nylon, Stainless Steel or chrome brass spiral hose


**Mounting Hole:** (2) 2-3/4", 3" on center

**Shipping Weight:** 6 lbs.




**#12141 Push-Button** spray handle with 6' white nylon hose

**#12165 Push-Button** spray handle with 6' Stainless Steel hose and mesh bag (#12112) to retain hose.

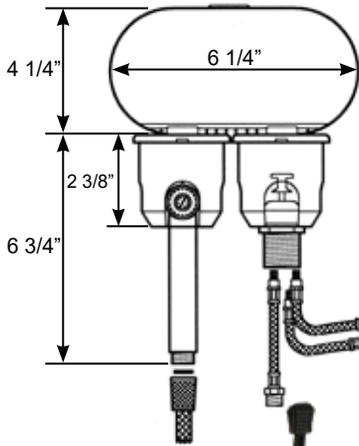

## Push Button Handle

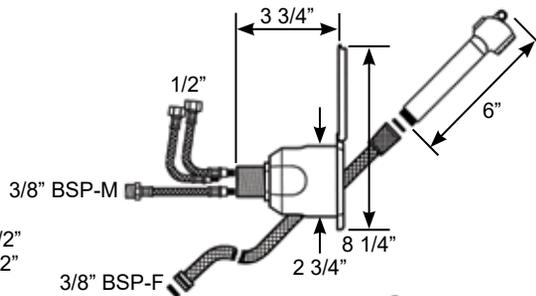


**#12167 Push-Button** spray handle with 6' white nylon hose. T-handle **COLD WATER** on/off valve.



**#12166 Push-Button** spray handle with 6' chrome flex hose and mesh bag (#12112) to retain hose.

## Euro Handle

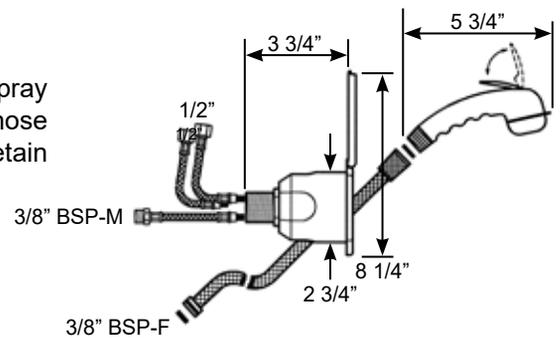


**#12142 Euro** spray handle with 6' white nylon hose, push trigger down for on/off or lock up for continuous water flow.



**#12144 Chrome Euro** spray handle with 6' white nylon hose, push trigger down for on/off or lock up for continuous water flow.

**#12169 Chrome Euro** spray handle with 6' chrome flex hose.

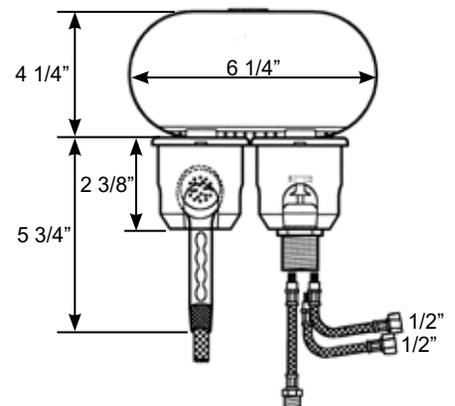

## Recessed Transom Showers


**Fifth generation Recessed Showers.** Improved UV protection, better water seal when cap is closed. Easy to use **Push-Button** or **Euro** trigger sprayer handles. Built-in grab ring for easy deployment. Mounts vertically or horizontally. Mounting hardware included.

**Water connection:** 3/8" BSP-F threaded fitting (except #12119, #12160, #12163). 1/2" NPS-M adaptor available (#10961 Delrin)

**Material:** ABS and chrome plated brass (push-button), all ABS (Euro) sprayers with nylon hose and composite cup and cap

**Mounting Hole:** 2-3/4"

**Shipping Weight:** 4 lbs.

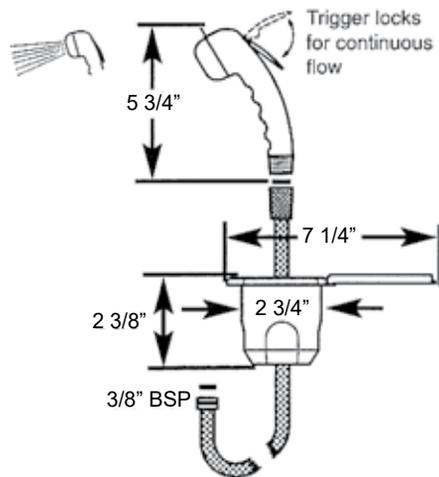

### Push-Button Handle

- #12106 White handle, cup and cap with 6' white hose
- #12117 White handle, cup and cap with 10' white hose
- #12163 White handle, cup and cap with 10' white hose (with 1/2" female end fitting)



### Euro Trigger Sprayer Handle

- #12107 White handle, white cup & cap with 6' white nylon hose
- #12119 Chrome handle, white cup & cap with 10' white nylon hose **with 1/2" NPS-F connection**
- #12123 White handle, white cup & cap with 10' white nylon hose
- #12140 White handle, white cup & cap with 6' stainless steel flex hose **with 1/2" NPS-F connection**
- #12160 White handle, white cup & cap with 6' white nylon hose **with 1/2" NPS-F connection**
- #12172 White handle, white cup & cap with 13' white nylon hose

Recessed T-handle mixing valve. Easy to use T-handle. Side to side movement controls water flow and rotating clockwise or counter clockwise controls temperature mixture. Mounting hardware included.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings, 3/8" BSP connection to shower hose.

**Material:** Chrome plated brass valve with composite recessed cap and cup

**Mounting Hole:** 2-3/4"

**Shipping Weight:** 4 lbs.

#12108 White cap and cup

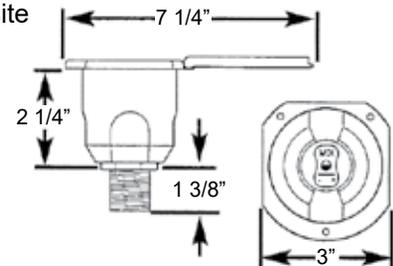

## Recessed Transom Showers

Recessed **Push-Button** Transom Shower with T-handle mixing valve. Can be mounted vertically or horizontally. Mounting hardware included.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings



**Material:** ABS and chrome plated brass sprayer with nylon hose and chrome plated brass mixing valve

**Mounting Holes:** (2) 2-3/4", 3" on center

**Shipping Weight:** 4 lbs.

**#12109** White handle, cup & cap with 6' white nylon hose

**#12121** White handle, cup & cap with 10' white nylon hose

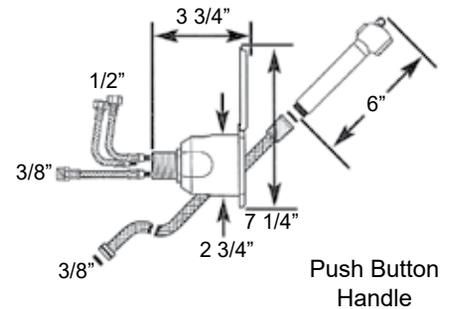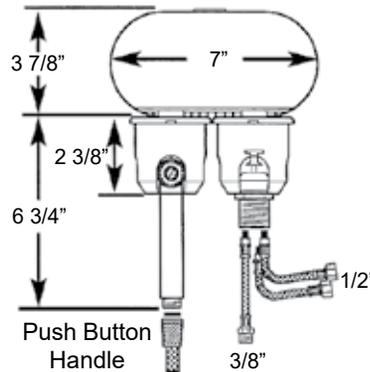

Recessed **EURO** trigger handle transom shower with T-handle mixing valve. Can be mounted vertically or horizontally. Mounting hardware included.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings



**Material:** ABS and chrome plated brass sprayer with nylon hose and chrome plated brass mixing valve

**Mounting Holes:** (2) 2-3/4", 3" on center

**Shipping Weight:** 4 lbs.

**#12110** White handle, cup & cap with 6' white nylon hose

**#12122** White handle, cup & cap with 10' white nylon hose

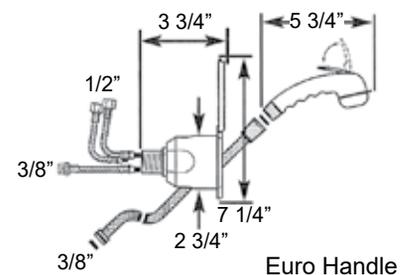

## Recessed Transom Showers

Second Generation recessed shower for **vertical installation**. Soft cap fits snug and provides water tight seal. Easy installation with a 2-1/4" hole saw. A favorite among the smaller runabout center consoles. **Available in WHITE ONLY**. The cap has the **Scandvik logo** on top.

**Water Connection:** 3/8" BSP-F fitting. 1/2" NPS-M adapter available (#10961 Delrin)

**Material:** ABS and chrome plated brass sprayer, plastic cap and cup and nylon hose

**Mounting Hole:** 2-1/4"

**Shipping Weight:** 4 lbs.


#10750 Recessed shower with 6' white nylon hose

#10775 Recessed shower with 10' white nylon hose

#10795 Recessed shower with 13' white nylon hose



Scandvik Logo on Cap

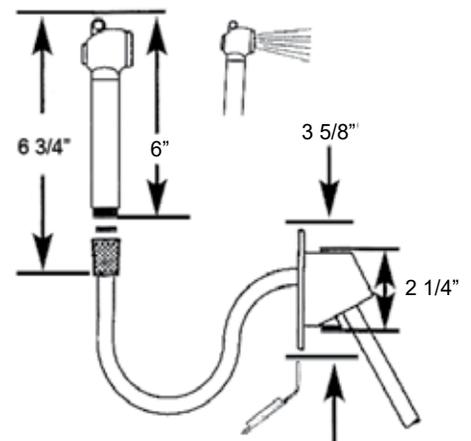

## Recessed Transom Showers

The original recessed shower that revolutionized the industry. Soft cap fits snug and provides water tight seal. Easy installation with a 2-1/4" hole saw. **Horizontal mount** only. Available in white or black. The cap has a **Shower Symbol** on top.

**Water Connection:** 3/8" BSP-F fitting. 1/2" NPS-M adapter available (#10961 Delrin)

**Material:** ABS and chrome plated brass sprayer, plastic cap and cup and nylon hose

**Mounting Hole:** 2-1/4"

**Shipping Weight:** 4 lbs.

#10055 White with 6' nylon hose

#10265 Black with 6' nylon hose

#10275 White with 10' nylon hose

#10276 Black with 10' nylon hose

#10298 White with 13' nylon hose

#10299 Black with 13' nylon hose

#10826 White with 20' nylon hose

#10827 Black with 20' nylon hose



Shower Symbol on Cap



Temperature control valve with positive on/off with matching cup and cap assembly to the showers above. The cap has a **Shower Symbol** on top.

**Water Connection:** Flexible supply lines with 1/2" NPS-F connection, 3/8" BSP-M connection to shower hose.

**Material:** Chrome plated brass valve with plastic recessed cup

**Mounting Hole:** 2-1/4"

**Shipping Weight:** 4 lbs.

#10498 Mixing valve with white cup and cap

#10611 Mixing valve with black cup and cap



On/off **COLD WATER** control valve with matching cup and cap assembly to the showers above.

**Water Connection:** 1/2" NPS-M with included adapter (#10015).

**Material:** Chrome plated brass with plastic recessed cup and rubber cap.

**Mounting Hole:** 2-1/4"

**Shipping Weight:** 3 lbs.

#10835 **COLD WATER** tap with white cup and cap



# Recessed Transom Showers

Plumbing



**NEW** Elka **Recessed POP-UP Shower** is designed to be mounted on horizontal surfaces. Simply push down on the top of the wand to lift out. Mixer handle version twists to adjust temperature and flow. Single temperature version twists for flow. To stow away, return the wand in the receiver and push down the top to lock into place.

**Water Connection:** 1/2" NPS-F

**Material:** Anodized Aluminum, **316 Stainless Steel**


**Hose:** 10' Braided Nylon

**Mounting Hole:** 2"


**Shipping Weight:** 4 lbs.



- #16136 Aluminum Matte Finish Pop-Up Shower for **COLD WATER**
- #16135 Aluminum Matte Finish Pop-Up Shower with mixer
- #16140 Stainless Steel Pop-Up Shower for **COLD WATER**
- #16141 Stainless Steel Pop-Up Shower with mixer

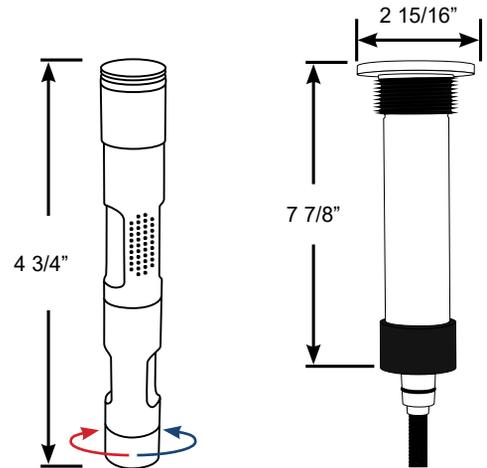

Transom Shower Dimensions



Hose connections for mixer and cold water




316 Stainless Steel  
#16141



Built-in Swivel Control Valve for on/off and temperature control

# Removable Folding Shower Column

## Carbon Fiber Folding Shower Column

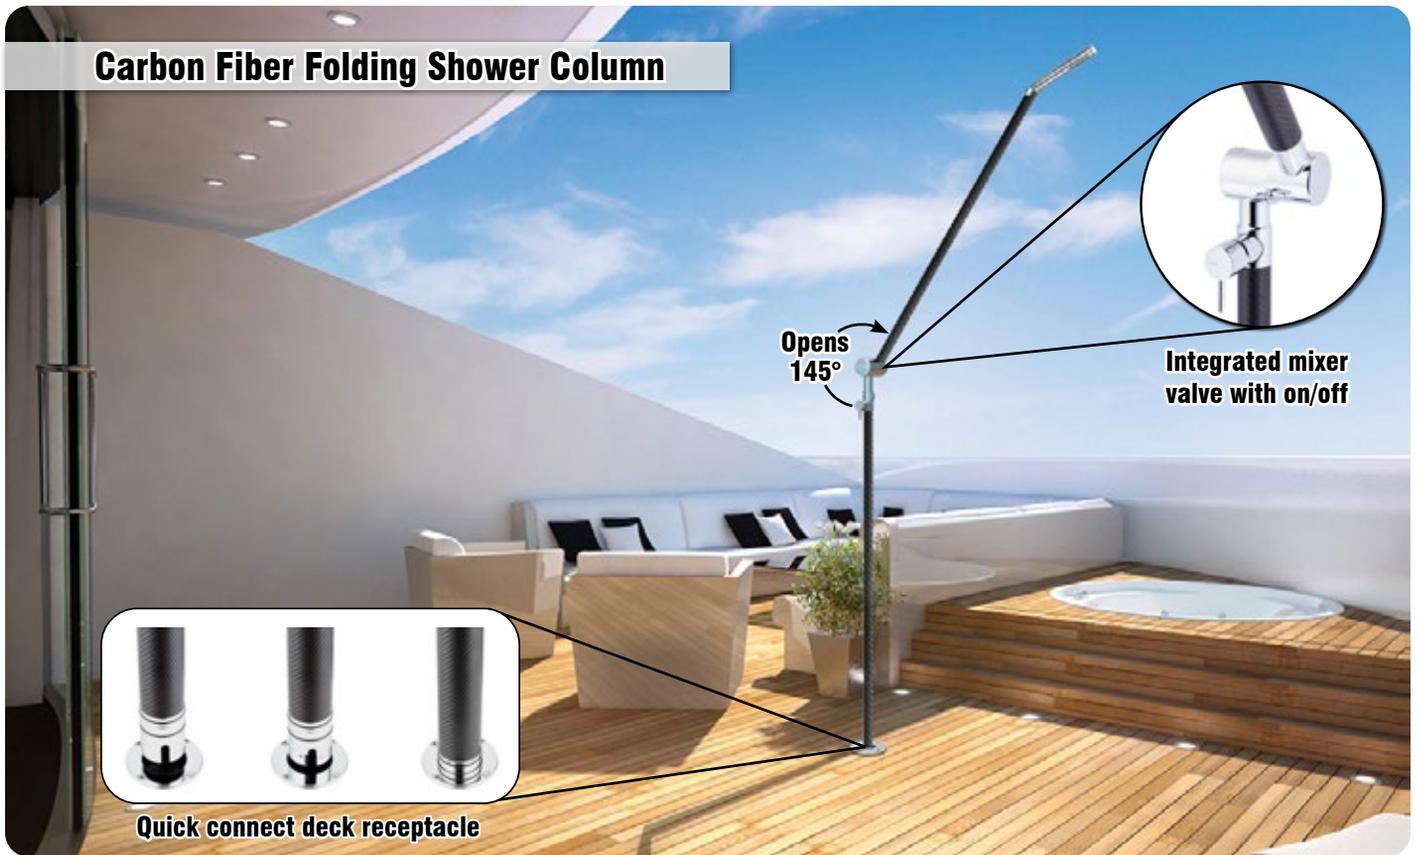

Opens  
145°

Integrated mixer  
valve with on/off

Quick connect deck receptacle

**NEW** Exquisite yacht quality **Removable Folding Shower Column**. Light weight carbon fiber poles with beautiful chrome plated brass hinge and single lever mixer. Simply unscrew deck plate and lower the shower column base into the pressurizing deck receptacle. Folds in half to stow away. **#16222** includes diverter and hand held shower. Deck receptacle has chrome plated cover when not in use.

**Water Connection:** 1/2" NPS-F

**Material:** Chrome plated brass with carbon fiber poles



**Mounting Hole:** 3" Diameter

**Shipping Weight:** 22 lbs.

**#16224** Carbon Fiber Folding Shower Column (Shown)

**#16222** Carbon Fiber Folding Shower Column with  
Diverter and Hand Shower

**#16223** Quick Connect Deck Receptacle

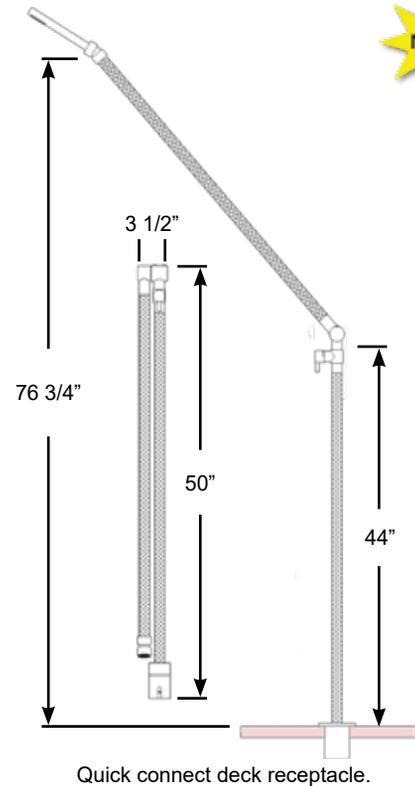

## Shower Boxes

High quality shower boxes with acrylic capped ABS exterior for better UV protection. Concealed mounting screws and integrated composite hinge. Several different models to choose from, ranging from cold only to mixing versions. Each style includes a 6' white nylon retractable hose. All configurations are available with a **Standard** or **Euro** Spray handle. Both spray handles feature a trigger sprayer for on/off control or flip-up lock for continuous water flow.



Shower Box Closed

**Cut-out dimensions:**

8-5/8" wide x 6-1/2" high, requires 4" depth

**Shipping Weight:** 5 lbs.

**Mounting Hardware Included**



Standard Sprayer

Euro Sprayer



**Valve:** Chrome plated brass with chrome ABS knob.

**Water Connection:** 3/8" threaded shaft, 1/2" NPS-M adapter included

**#10641 Standard Sprayer with COLD WATER only**

**#14103 Euro Sprayer with COLD WATER only**

**#14108 Euro Sprayer with T-handle mixer**



**Valve:** Chrome plated brass

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**#10642 Standard Sprayer with T-handle mixer**



**Mixer:** Chrome plated brass mixer with acrylic knobs

**Water Connection:** 3/8" threaded shafts. 1/2" NPS-M adapters included

**#10640 Standard Sprayer with mixer (Shown)**

**#14100 Euro Sprayer with mixer**




**Mixer:** Chrome plated brass with chrome ABS knobs

**Water Connection:** 3/8" threaded shafts, 1/2" NPS-M adapters included

**#10765 Standard Sprayer with mixer (Shown)**

**#14101 Euro Sprayer with mixer**

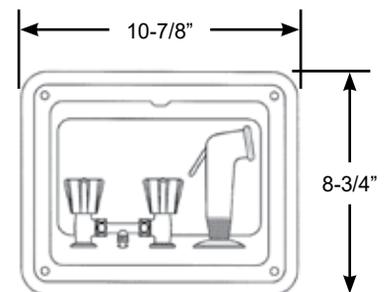


**#12112 Bag**

**#13032 Clamp**

Mesh bag available separately to contain hose.  
Bag clamps to bottom of sprayer handle holder.

## Shower Boxes



Vertical shower box with single lever mixing valve. **Euro** sprayer handle with nylon hose. Mounting hardware included.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass valve with ABS sprayer

**Cut-out dimensions:** 4-7/16" wide x 9-15/16" high, requires 5" depth

**Shipping Weight:** 5 lbs.


**#14122** Black sprayer with 6' black nylon hose

**#14126** White sprayer with 6' black nylon hose

**#14126** Chrome sprayer with 6' black nylon hose

**#14128** Chrome sprayer with 6' White nylon hose

**#14129** Chrome sprayer with 6' Chrome flex hose



Vertical shower cavity (no door) with single lever mixing valve. One piece molded acrylic capped ABS. Off-white color #12 to match most off-white hulls. **Euro** sprayer handle attached to 13' nylon hose. Mounting hardware included.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** White powder coated brass mixer with ABS sprayer


**Cut-out dimensions:** 4-7/16" wide x 9-15/16" high, requires 5" depth

**Shipping Weight:** 5 lbs.

**#14157** White sprayer with white nylon hose



## Washdown Boxes

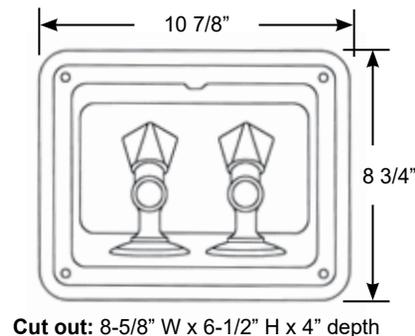

Flush mount boxes hide single and double wash down hose spigots. Minimal 1" protrusion beyond mounting surface. Thermo-formed, acrylic capped ABS box with incorporated hinge features one or two wash down spigots. Double spigot version makes a great fresh and salt water wash down station. Mounting hardware included.

**Water Connection:** 1/2" NPS-M threaded shaft, 1/2" hose barb included

**Shipping Weight:** 5 lbs.

**#14070** Single **316 Stainless Steel** spigot

**#14077** Single Chrome brass/plastic spigot

**#14071** Double **316 Stainless Steel** spigot

**#14078** Double Chrome brass/plastic spigot



## Standard and Euro STRAIGHT Sprayers



### Standard Sprayers


Traditional **Standard Sprayers** are as reliable as they are functional. Included counter-top holder leaves the sprayer in a ready-for-action position. Available in a variation of hose material and lengths. Sprayer handle features a trigger sprayer for on/off control or flip-up lock for continuous water flow.

**Water Connection:** 3/8" BSP-F fitting, 1/2" NPS-M adapter available (#10961 Delrin)

**Material:** Glass reinforced plastic sprayer with nylon or chrome plated brass hose

**Mounting Hole:** 1-1/16"

**Shipping Weight:** 4 lbs.

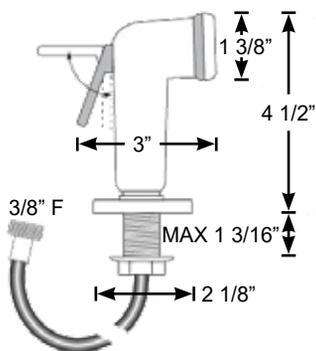

- #10195 White sprayer with 6' chrome-flex hose
- #10196 White sprayer with 6' white nylon hose
- #10197 White sprayer with 10' white nylon hose

- #10198 Black sprayer with 6' chrome-flex hose
- #10054 Black sprayer with 6' black nylon hose
- #10086 Black sprayer with 10' black nylon hose



### Euro Sprayers

**Euro Sprayers** are equally versatile, but with a modern look. Included counter-top holder leaves the sprayer in a ready-for-action position. Available in a variation of hose material and lengths. Sprayer handle features a trigger sprayer for on/off control or flip-up lock for continuous water flow.

**Water Connection:** 3/8" BSP-F fitting, 1/2" NPS-M adapter available (#10961 Delrin)

**Material:** ABS sprayer with nylon or chrome plated brass hose


**Mounting Hole:** 1-1/16"

**Shipping Weight:** 4 lbs.

- #14029 White sprayer with 6' chrome-flex hose
- #14031 White sprayer with 6' white nylon hose
- #14075 White sprayer with 13' white nylon hose
- #14074 White sprayer with 20' white nylon hose

- #14030 Black sprayer with 6' chrome-flex hose
- #14032 Black sprayer with 6' black nylon hose

- #14042 Chrome sprayer with 6' chrome-flex hose
- #14043 Chrome sprayer with 6' white nylon hose
- #14044 Chrome sprayer with 6' black nylon hose
- #14054 Chrome sprayer with 13' black nylon hose
- #14053 Chrome sprayer with 20' black nylon hose

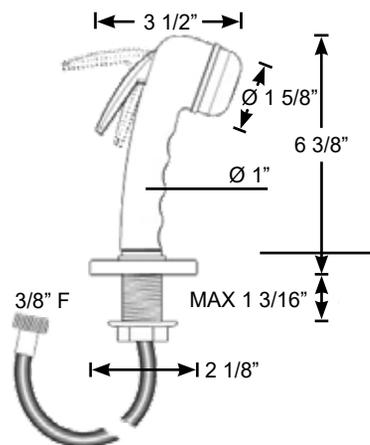

# Standard and Euro ELBOW Sprayers

## Standard Sprayers

Traditional **Standard Sprayers** are as reliable as they are functional. Included counter-top holder leaves the sprayer in a ready-for-action position. Available in a variation of hose material and lengths. Sprayer handle features a trigger sprayer for on/off control or flip-up lock for continuous water flow.

**Water Connection:** 3/8" BSP-F fitting, 1/2" NPS-M adapter available (#10961 Delrin)

**Material:** Glass reinforced plastic sprayer with nylon or chrome plated brass hose


**Mounting Hole:** 1-1/16"

**Shipping Weight:** 4 lbs.



- #10190 White sprayer with 5' chrome-flex hose
- #10191 White sprayer with 6' white nylon hose
- #10199 White sprayer with 10' white nylon hose

- #10192 Black sprayer with 5' chrome-flex hose
- #10193 Black sprayer with 6' black nylon hose
- #10194 Black sprayer with 10' black nylon hose

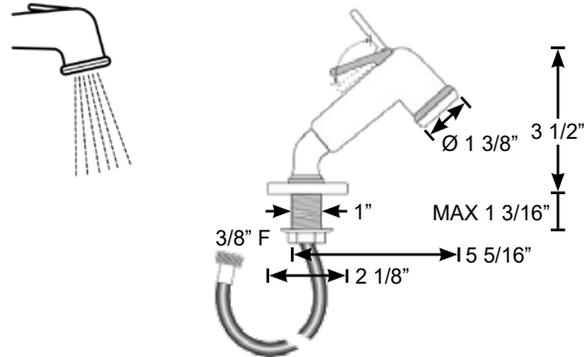

## Euro Sprayers

**Euro Sprayers** are equally versatile, but with a modern look. Included counter-top holder leaves the sprayer in a ready-for-action position. Available in a variation of hose material and lengths. Sprayer handle features a trigger sprayer for on/off control or flip-up lock for continuous water flow.

**Water Connection:** 3/8" BSP-F fitting, 1/2" NPS-M adapter available (#10961 Delrin).

#14038 and #14041 have 1/2" NPS-F fitting.

**Material:** ABS sprayer with nylon or chrome plated brass hose


**Mounting Hole:** 1-1/16"

**Shipping Weight:** 4 lbs.



- #14025 White sprayer with 6' chrome-flex hose
- #14027 White sprayer with 6' white nylon hose
- #14055 White sprayer with 10' White nylon hose

- #14026 Black sprayer with 6' chrome-flex hose
- #14022 Black sprayer with 6' white nylon hose
- #14028 Black sprayer with 6' black nylon hose

- #14037 Chrome sprayer with 5' chrome-flex hose
- #14066 Chrome sprayer with 6' chrome-flex hose
- #14039 Chrome sprayer with 5' white nylon hose
- #14038 Chrome sprayer with 6' white nylon hose with 1/2" NPS-F fitting
- #14040 Chrome sprayer with 5' black nylon hose
- #14041 Chrome sprayer with 6' black nylon hose with 1/2" NPS-F fitting

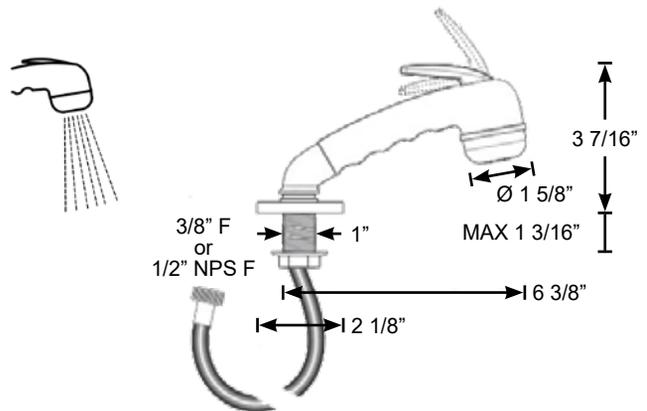

## Adjustable Flow Sprayers

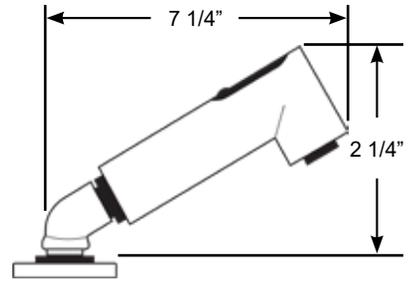

**Pull-out sprayer with Adjustable Water Flow.** A valve with a shut off is needed with this shower.

**Water Connection:** 3/8" BSP-F threaded fitting, 1/2" NPS-M adapter available (#10961 Delrin)

**Material:** ABS chrome plated sprayer with chrome plated brass hose



**Mounting Hole:** 1-1/16"

**Shipping Weight:** 4 lbs.

**#16215** Chrome sprayer with 6' chrome flex hose



## Adjustable Flow Sprayers

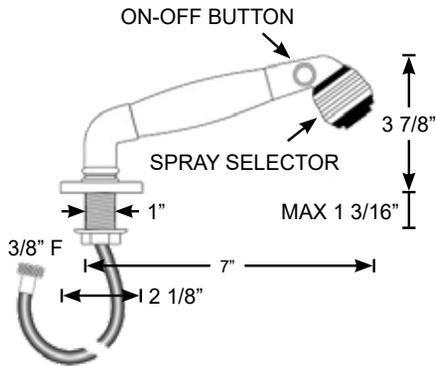

**Pull-out Sprayer with Adjustable Water Flow** and water conservation valve. If water conservation is important, this is the sprayer you will want to get. A valve with a shut off is needed with this shower.

**Water Connection:** 3/8" BSP-F threaded fitting, 1/2" NPS-M adapter available (#10961 Delrin)

**Material:** ABS and chrome plated brass sprayer with nylon or chrome plated brass hose



**Mounting Hole:** 1-1/16"

**Shipping Weight:** 4 lbs.

#10000 White sprayer with 6' white nylon hose

#10004 White sprayer with 6' chrome flex hose

#10012 Black sprayer with 6' black nylon hose

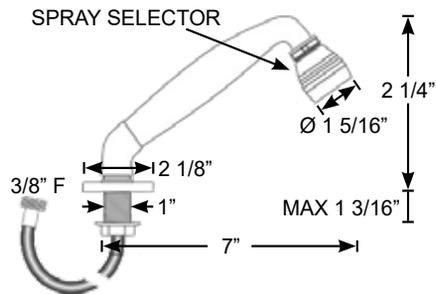

**Pull-out Sprayer with Adjustable Water Flow.** A valve with a shut off is needed with this shower.

**Water Connection:** 3/8" BSP-F threaded fitting, 1/2" NPS-M adapter available (#10961 Delrin)

**Material:** ABS and chrome plated brass sprayer with nylon or chrome plated brass hose

**Mounting Hole:** 1-1/16"

**Shipping Weight:** 4 lbs.

#10188 White sprayer with 6' chrome-flex hose


#10189 Black sprayer with 6' chrome-flex hose

# Shower Systems




1 fastener per end  
C to C 23 7/8"

**Mariner** curved shower rail, complete with soap dish.  
**Water Connection:** 1/2" NPS-F  
**Material:** 1" Diameter chrome plated brass rail with ABS sprayer and 6' stainless steel hose  
**Shipping Weight:** 3 lbs.  
**#70350** Shower System as shown  
**#71006** Rail and sprayer holder only

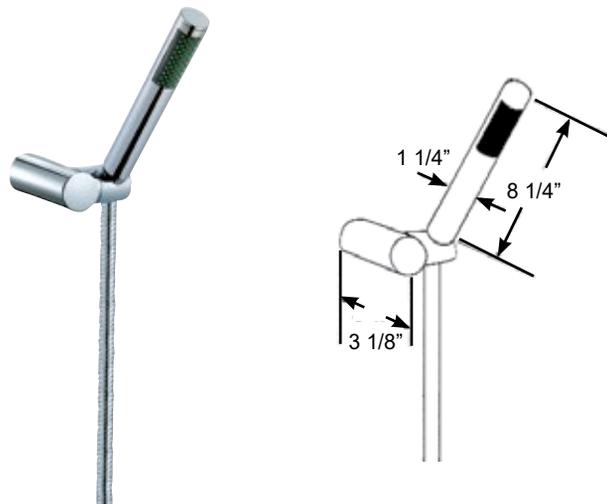


**Nordic** design spray handle with stainless steel hose and bulkhead holder.  
**Water Connection:** 1/2" NPS-F  
**Material:** Chrome ABS sprayer and holder  
**Shipping Weight:** 2 lbs.  
**#70101** Shower system with 6' hose  
**#70112** Shower system with 5' hose

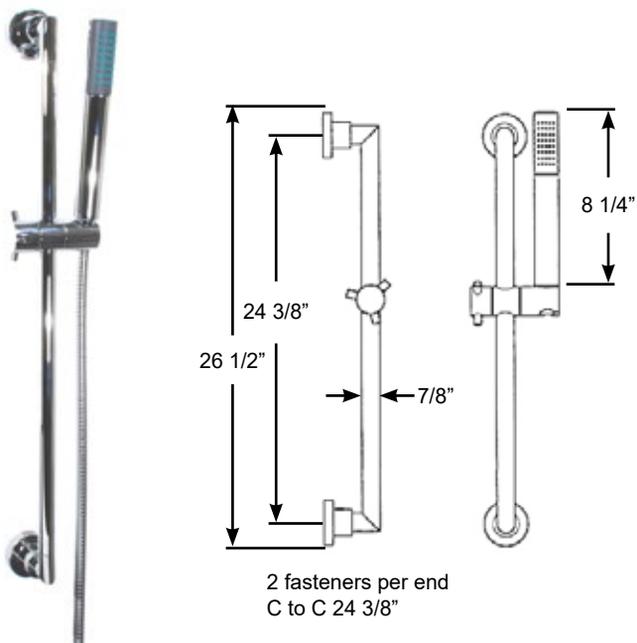

2 fasteners per end  
C to C 24 3/8"

**Nordic** heavy-duty adjustable shower rail kit.  
**Water Connection:** 1/2" NPS-F  
**Material:** 7/8" Diameter chrome plated brass rail with ABS sprayer and 6' stainless steel hose  
**Shipping Weight:** 5 lbs.  
**#70102** Shower system as shown  
**#71005** Rail and sprayer holder only

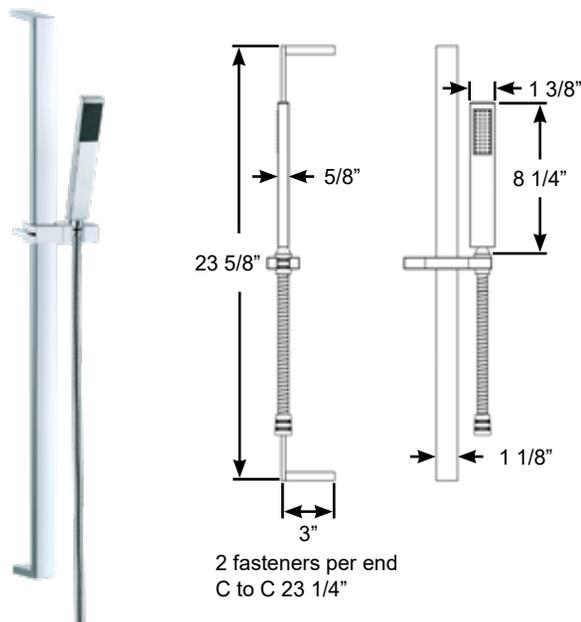

2 fasteners per end  
C to C 23 1/4"

**Yo** contemporary adjustable shower rail kit.  
**Water Connection:** 1/2" NPS-F  
**Material:** Chrome plated brass rail and sprayer and 5' or 6' stainless steel hose  
**Shipping Weight:** 6 lbs.  
**#70603** Shower system as shown with 6' hose  
**#70606** Shower system as shown with 5' hose  
**#71039** Rail and sprayer holder only

## THE EXECUTIVE

The **Executive** Shower System. Massage yourself with the adjustable shower spray. Fully adjustable 1" diameter rail with optional soap dish. Includes shower handle, adjustable rail and 5' chrome-flex hose. Use bulkhead elbow #10003 to route the plumbing behind the bulkhead to our single lever shower mixers.

**Water Connection:** 3/8" BSP-F fitting, fits most mixers and part #10003 bulkhead fitting

**Material:** Chrome ABS shower handle and end caps with a chrome plated brass rail

**Shipping Weight:** 5 lbs.


#10763 Executive Shower System

#14085 Executive Rail and Holder Only

Optional **ABS Soap Dish** for both Aqua Fina and Executive shower systems. Will fit any 1" or 3/4" diameter rails.



#10769

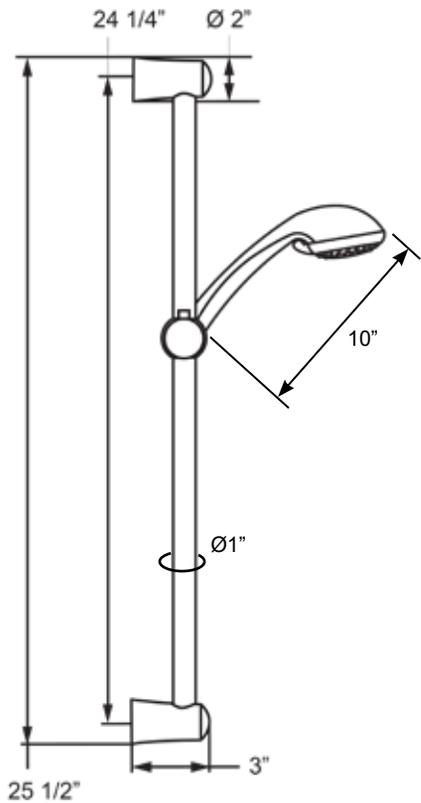

## THE AQUA FINA


The **Aqua Fina** Shower System. Push-button adjustable height control and a water conservation valve. Durable chrome finish. 3/4" diameter rail. Anti-scaling shower nozzle. Includes Shower handle, adjustable rail and 5' chrome-flex hose. Also available as a kit with a mixer.

**Water Connection:** 3/8" BSP-F fitting, fits most mixers and part #10003 bulkhead fitting

**Material:** Chrome ABS shower handle and end caps with a chrome plated brass rail

**Shipping Weight:** 5 lbs.

#10761 Aqua Fina Shower System

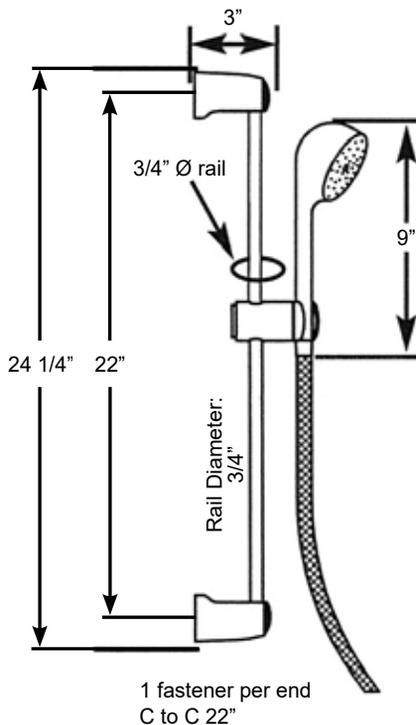


# Shower Systems



**NEW Nordic Stainless Steel Shower Rail** is built to last. Adjustable handle holder allows easy showering for all heights. Match with our stainless steel brushed bulkhead elbow **#74165** to professionally rout the plumbing behind the bulkhead

**Water Connection:** 1/2" NPS-F  
**Material:** 304 Stainless Steel, Brushed Finish  
**Shower Handle:** 7-3/4" Long Stainless Steel  
**Hose:** 6' Stainless Steel  
**Shipping Weight:** 8 lbs.

- #74180** Shower Rail with adjustable straight shower sprayer holder, Sprayer and Hose
- #74170** Shower Rail only with adjustable straight shower sprayer holder.

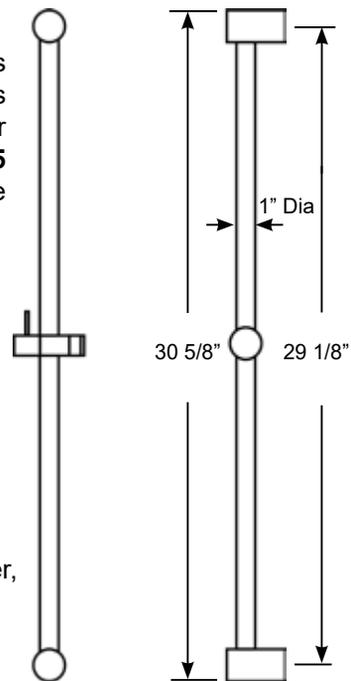

1 fastener per end  
C to C 29 1/8"




**Water Connection:** 1/2" NPS-F  
**Material:** Chrome plated shower rail  
**Shower Handle:** 7-3/4" Long chrome plated  
**Hose:** 5' Stainless Steel  
**Shipping Weight:** 8 lbs.

- #16298** Farley Shower Rail with adjustable straight shower sprayer holder, Sprayer, Hose and bulkhead connector.
- #15948** Optional Bulkhead Connector



Bulkhead Connector

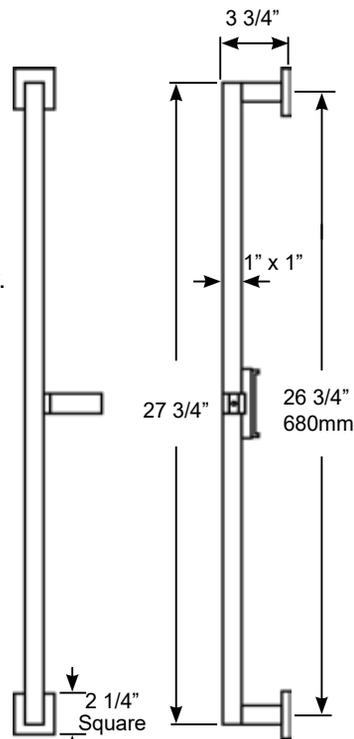


1 fastener per end  
C to C 26 3/4"

# Shower Systems




Plumbing

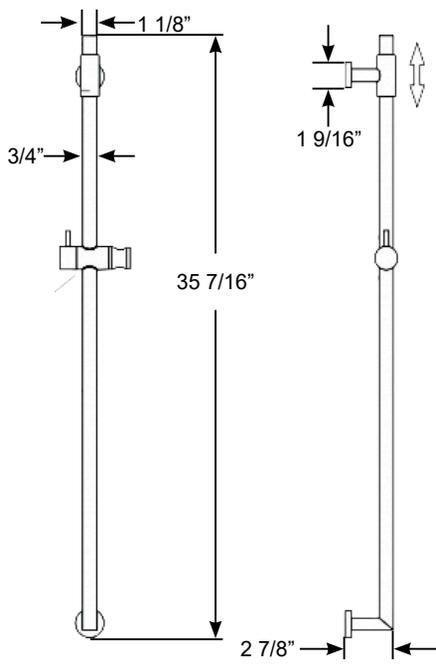

**NEW Sable Family Shower Rail.** Exquisite mat black finish sets this shower rail apart from the rest. Adjustable handle holder allows easy showering for all heights. Match with our mat black bulkhead elbow, #45130, to professionally route the plumbing behind the bulkhead. 5' black silicone hose.

**Water Connection:** 1/2" NPS-F  
**Material:** All brass with a matte black finish  
**Shipping Weight:** 6 lbs.

**#45125 Sable Family Shower Rail**  
**#45130 Optional Bulkhead Connector** (see page 48)



# Shower Kits

## Shower Rail Kit



Includes the **Aqua Fina** Shower System (page 27) and the **#10411** mixing bridge.

**Water Connection:** 3/8" BSP threaded shafts with 1/2" NPS-M Delrin adapters included (**#10015**)

**Material:** Chrome plated brass rail and mixer body, plastic mixer knobs, shower handle and rail end caps

**Mounting Hole:** 2 each, 5/8"

**Shipping Weight:** 6 lbs.

**#14140** Standard knob


**#14112** Triangle knob



14112



14140

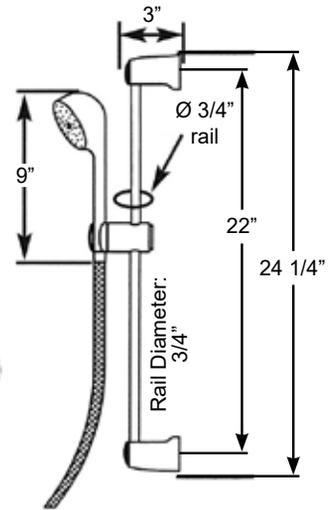

Standard Sprayers



Euro Sprayers



Triangle knob



Acrylic knob

## Standard and Euro Shower Kit

Includes a **Standard** or **Euro** shower handle, 6' nylon hose and (**#10401** acrylic knob) or (**#10062** triangle knob) mixing bridge. 1/2" bulkhead shower handle holders sold separately.

**Water Connection:** 3/8" BSP threaded shafts with 1/2" NPS-M Delrin adapters included (**#10015**)

**Material:** Chrome plated brass mixer with acrylic or ABS knobs, ABS or glass reinforced nylon shower handles and nylon hose

**Mounting Hole:** 2 each, 5/8"

**Shipping Weight:** 6 lbs.

### Acrylic Knobs

**#10406** White Standard sprayer with white hose

**#10770** Black Standard sprayer with black hose


**#14119** White Euro sprayer with white hose

**#14227** Black Euro sprayer with black hose

### Triangle Knobs

**#10405** White Standard sprayer with white hose

**#14117** White Euro sprayer with white hose

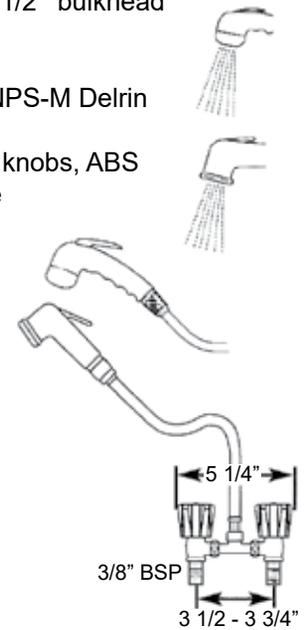

Complete shower kit. Includes mixing bridge, shower handle with on/off, 5' chrome-flex hose and bulkhead holder. Available with white or black shower handle. Mixer is shown as a bulkhead mount. Same unit can also be counter-top mounted.

**Water Connection:** 3/8" BSP threaded shafts with 1/2" NPS-M Delrin adapters included (**#10015**).


**Material:** Chrome plated brass

**Mounting Hole:** 2 each, 5/8"

**Shipping Weight:** 4 lbs.

**#14087** Black shower handle

**#14091** White shower handle



# Shower Kits

**NEW SLANT Family Mixer and Pull-Out Shower Handle with ceramic valve**


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole Mixer:** 1-1/4"

**Mounting Hole Handle Holder:** 1-1/16"

**#07036** Mixer and Shower Kit

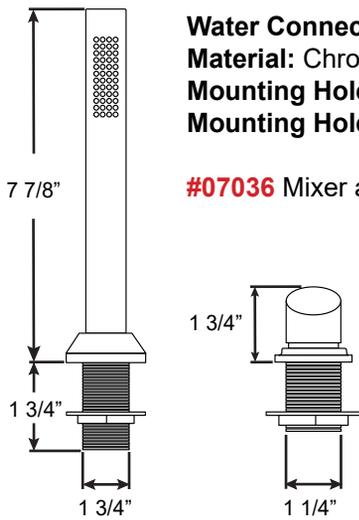

Mixer and Pullout Shower Dimensions



#07036



# ALL-IN-ONE SHOWER SYSTEM



This unique sliding rail shower system combines a 28" long shower rail with integrated mixer, hose and shower handle all-in-one. Installation requires the hot and cold water supply to be connected to the top and bottom mounting system for the rail. The rail is then snapped onto the quick-connect fittings at the top and bottom. The complete system can be disconnected in seconds and put away if necessary.

**Water Connection:** (2) 1/2" NPS threaded pipe  
**Material:** Chrome plated brass rail and shower handle  
**Mounting Holes:** (2) 7/8"  
**Shipping Weight:** 10 lbs.


#16114 Chrome  
 #16116 Carbon Fiber



A typical shower bar installation requires 4 holes and 3 connections.



The ALL-IN-ONE shower system requires only 2 holes and 2 connections to install.

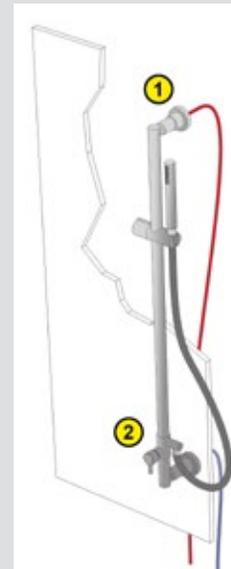



# Flush Rain Showers



The thinnest built in shower around. **Elka's 316 Stainless Steel Contemporary Ceiling Mounted Rain Shower** only requires a 3/4" depth. Available with or without LED lights. In square, rectangular, or round designs. Popular for both exterior and interior applications.


**Water Connection:** 1/2" NPS-F fitting  
**Material:** Chrome Plated **316 Stainless Steel**  
**Protection:** IP68  
**Shipping Weight:** 5 lb



## Square


**New Smaller Size:** 7-1/2" x 7-1/2"  
**Mounting Hole:** 6-1/4" x 6-1/4"  
**Depth:** 3/4"

**#16105** without LED  
**#16120** Black without LED



**Larger Size:** 8-1/4" x 8-1/4"  
**Mounting Hole:** 7-1/4" x 7-1/4"  
**Depth:** 3/4"


**#16100** with 12V white LED  
**#16101** with 24V white LED  
**#16102** without LED  
**#16121** Black without LED



## Rectangular


**Mounting Hole:** 11-5/8" x 7-5/8"  
**Depth:** 3/4"

**#16103** without LED

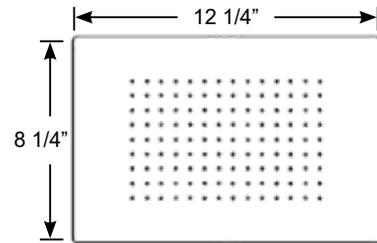


**Round** with new COB LED  
**Mounting Hole:** 8-3/4" Dia.  
**Depth:** 3/4"

**#16110** with 12V white LED  
**#16111** with 24V white LED  
**#16112** without LED

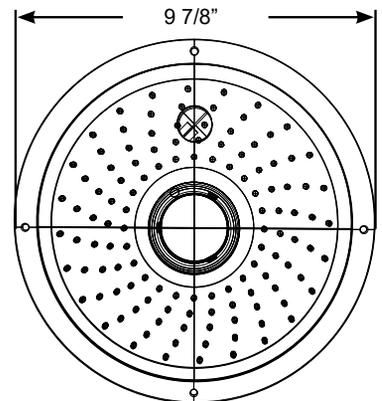

# Shower Heads

## Shower Stub

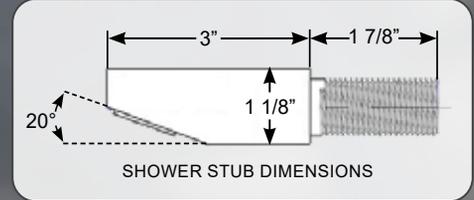

Scandvik's **NEW Shower Stub** is a simple solution for hardtop and bulkhead mount showers. Pair with Scandvik's shower mixers or a solenoid valve and switch. The scale resistant sprayer aerator can be removed for powder coating and service.

**Water Connection:** 1/2" NPS-M  
**Material:** 304 Stainless Steel, Brushed Finish  
**Mounting Hole:** 7/8"  
**Shipping Weight:** 3 lbs.





**#74153 Shower Stub 3"**

## Slim Rain Shower Heads

**Water Connection:** 1/2" NPS-F  
**Material:** 304 Brushed Stainless Steel  
**Dimensions:** 7-7/8" diameter  
**Shipping Weight:** 3 lbs.

**#74150** Stainless Steel Round Shower with Swivel Head

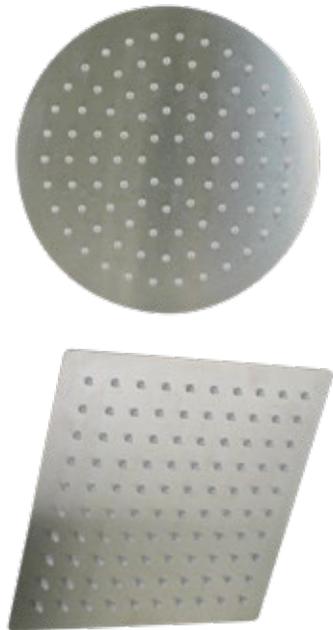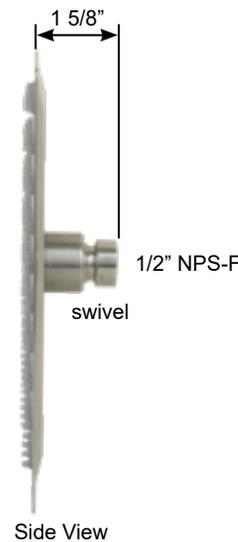


**Water Connection:** 1/2" NPS-F  
**Material:** 304 Brushed Stainless Steel  
**Dimensions:** 7-7/8" x 7-7/8"  
**Shipping Weight:** 3 lbs.

**#74151** Stainless Steel Square Shower with Swivel Head

## Modern Swivel Shower Head

**Water Connection:** 1/2" NPS-F  
**Material:** Chrome Plated ABS  
**Shipping Weight:** 2 lbs.

**#07014** Chrome ABS Square Shower with Swivel Head




## Bulkhead Holder for ELBOW Handles



3/8" Holder for **ELBOW** shower handles. Bulkhead swivel shower handle holder. Easy single screw installation.

**Material:** Chrome plated brass  
**Shipping Weight:** 2 lbs.

**#10650** Chrome Holder




## Shower Rails and Bulkhead Holders for STRAIGHT Handles



Fixed Bulkhead Shower Holder for **STRAIGHT** shower handles.

**Material:** Chrome ABS  
**Shipping Weight:** 1 lb.


**#14067** Chrome ABS Bulkhead Shower Holder

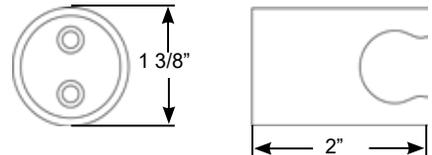

Bulkhead Shower Holder for **STRAIGHT** Shower Handles has adjustable shower angle.

**Material:** Chrome ABS  
**Shipping Weight:** 1 lb.


**#10840** Chrome ABS Bulkhead Shower Holder

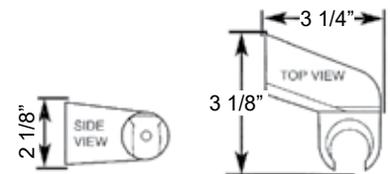

Bulkhead Shower Holder for **STRAIGHT** Shower Handles, has adjustable shower angle.

**Material:** Chrome ABS  
**Shipping Weight:** 1 lb.

**#71004** Chrome ABS Bulkhead Shower Holder



## Shower Rails and Bulkhead Holders for STRAIGHT Handles



Premium Heavy-duty Adjustable Shower Rail for our shower kits.  
Fits all **STRAIGHT** shower handles.


**Material:** Entirely chrome plated brass  
**Rail Diameter:** 7/8"  
**Shipping Weight:** 5 lbs.

**#71005** Chrome Premium Heavy-duty Adjustable Shower Rail

Light Weight Adjustable Shower Rail for our shower kits.  
Fits all **STRAIGHT** shower handles.

**Material:** Chrome plated brass, ABS end fittings and shower handle holder  
**Rail Diameter:** 3/4"  
**Rail Projection:** 3-1/8"  
**Shipping Weight:** 4 lbs.


**#14080** Chrome Shower Rail with ABS End Fittings



Fixed Bulkhead Shower Holder for **STRAIGHT** shower handles.

**Material:** Chrome ABS  
**Shipping Weight:** 1 lb.

**#15929** Chrome ABS Bulkhead Shower Holder



Adjustable bulkhead holder for **STRAIGHT** shower handles. Swivels 360 degrees for better adjustment.

**Material:** Chrome plated brass  
**Shipping Weight:** 1 lb.

**#10013** Chrome Bulkhead Shower Holder




# Washdowns

Rugged all **316 Stainless Steel** wash down spigot. Also available with chrome plated brass body with chrome plastic knob. Standard 3/4" garden hose thread provides easy hose attachment for quick wash downs.

**Water Connection:** 1/2" NPS-M threaded shaft. Optional 1/2" hose barb available  
**Flange Diameter:** 2-1/4"  
**Mounting Hole:** 1"  
**Shipping Weight:** 2 lbs.

**#10187** All 316 Stainless Steel  
**#10186** Chrome plated brass

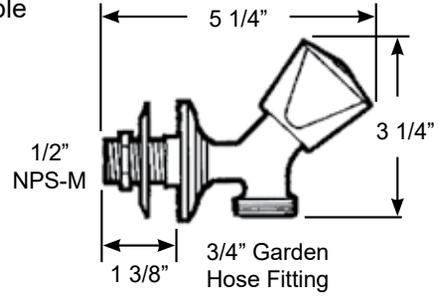

*Flow Rate:*  
 2.2 gal/min  
 8.3 liter/min @ 40 psi

**Installation**  
 For extra thick bulkheads, use a 2" extender. Includes 2 SS washers and 1 brass nut.  
**#10092**




## Stainless Steel Angled Washdown


**316 Stainless Steel** spigot. Mounts easily with 3 #6 screws to bulkhead. 1/4 turn ceramic valve. Standard 3/4" garden hose thread for hose attachment. Includes interchangeable **FRESH** and **RAW** pendant.

**Water Connection:** 1/2" NPT-F  
**Flow Rate:** 3.05 gallons/min. (11.55 liters/min.)  
**Flange Diameter:** 2-3/8"  
**Shipping Weight:** 2 lbs.

**#10175** Angled Wash down

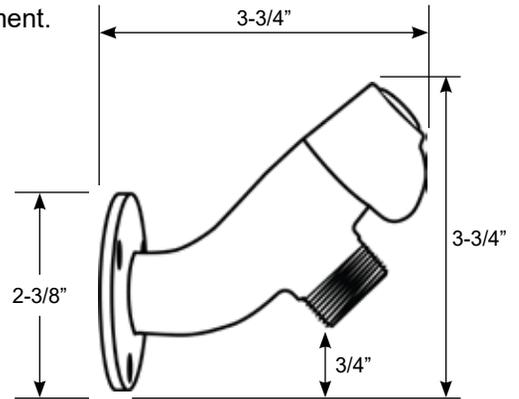

## Cold Water Compact Showers Controls

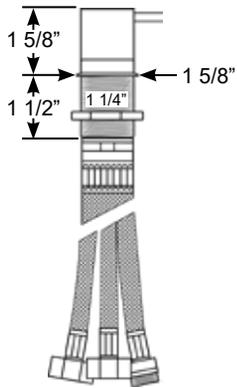

**Single Lever** on/off valve (Cold Only) , this valve is designed for use with our Push-Button or Euro trigger pull-out shower handles (see **#12139** and **#12145**). With the water pressure turned on simply rotate the valve to turn on the sprayer.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Hose Connection:** 3/8" BSP-M fitting


**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 3 lbs.



**#16195** Chrome ON/OFF Valve (**COLD ONLY**)

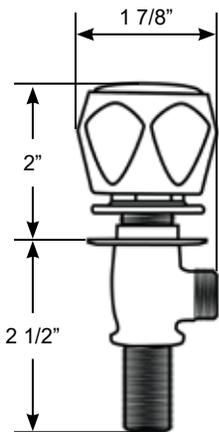

**Compact COLD WATER** tap for shower control. Bulkhead or counter top mount. (Max mounting surface thickness 1/2") 10015 1/2" adapter included.

**Water Connection:** 3/8" BSP Threaded shaft, 1/2" NPS-M nylon adapter included

**Hose Connection:** 3/8" BSP-M

**Material:** Chrome plated brass faucet body with ABS knob

**Mounting Hole:** 7/8"

**Bulkhead or Counter top thickness:** 5/16" to 3/8"


**Shipping Weight:** 2 lbs.

**#10091** Chrome knob

**#10857** White knob



#10015 1/2" Adapter Included



**Compact T-handle COLD WATER** tap for shower control. Bulkhead or counter top mount. 10015 1/2" adapter included.

**Water Connection:** 3/8" BSP Threaded shaft, 1/2" NPS-M nylon adapter included

**Hose Connection:** 3/8" BSP-M

**Material:** Brass faucet body with chrome plated brass knob

**Mounting Hole:** 7/8"


**Bulkhead or Counter top thickness:** 9/16" maximum

**Shipping Weight:** 2 lbs.

**#10856** Chrome plated brass



#10015 1/2" Adapter Included



**Compact COLD WATER** tap for shower control. Hose fitting swivels 360°. 10015 1/2" adapter included.

**Water Connection:** 3/8" BSP Threaded shaft, 1/2" NPS-M nylon adapter included

**Hose Connection:** 3/8" BSP-M

**Material:** Chrome plated brass

**Mounting Hole:** 5/8"

**Shipping Weight:** 2 lbs.

**#14084** Chrome plated brass



#10015 1/2" Adapter Included

# Shower Valves / Thermostatic Mixers



**NEW Thermostatic Mixer Heavy Type.** Features temperature control with a locking button at 100.4°F. Automatically maintains the water temperature output for the shower with incoming water supply temperature fluctuations. This fixture acts as an anti-scald device.

**Water Connection:** (2) 3/4" BSP-F threaded shafts, 6" center to center

**Shower Hose Connection:** 1/2" BSP-M

**Material:** Chrome plated brass, Chrome ABS handles

**Mounting Hole:** (2) 5/8"

**Shipping Weight:** 4 lbs.

**#10512** Heavy Type Thermostatic Mixer



**NEW Thermostatic Mixer Light Type.** Features temperature control with a locking button at 100.4°F. Automatically maintains the water temperature output for the shower with incoming water supply temperature fluctuations. This fixture acts as an anti-scald device.

**Water Connection:** (2) 3/4" BSP-F threaded shafts, 6" center to center


**Shower Hose Connection:** 1/2" BSP-M

**Material:** Chrome plated brass, Chrome ABS handles

**Mounting Hole:** (2) 5/8"

**Shipping Weight:** 4 lbs.

**#10510** Light Type Thermostatic Mixer

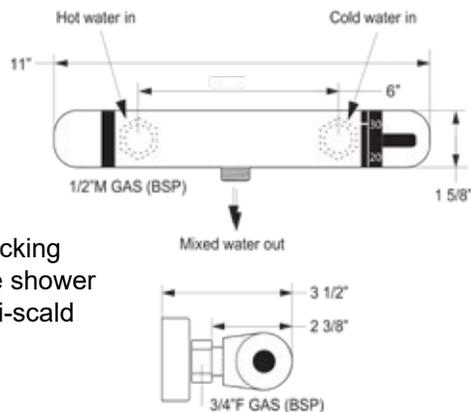



**2 Offset Threaded Adaptors included**



**Optional Extensions for Bulkhead Mounting**



**#17114** 1/2" BSP-M x 3/4" BSP-M  
**Material:** Brass with SS Washers

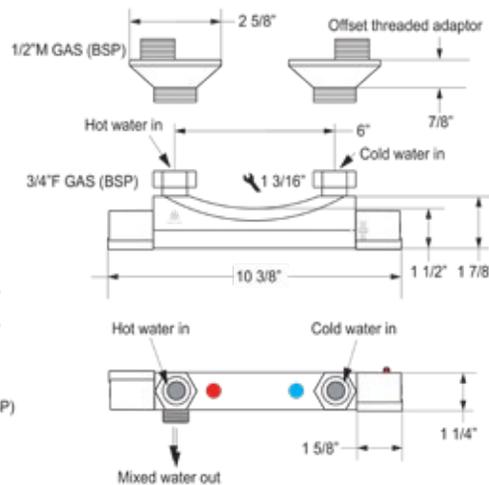

**Mini-Compact Thermostatic Mixer.** Set the water temperature that you prefer and leave it. Automatically maintains the water temperature output for the shower with incoming water supply temperature fluctuations.

**Water Connection:** (2) 1/2" NPS-M threaded shafts, 1-3/4" center to center


**Shower Hose Connection:** 1/2"

**Material:** Chrome plated brass


**Mounting Hole:** (2) 5/8"

**Shipping Weight:** 4 lbs.

**#16204** Mini Compact Thermostatic Mixer

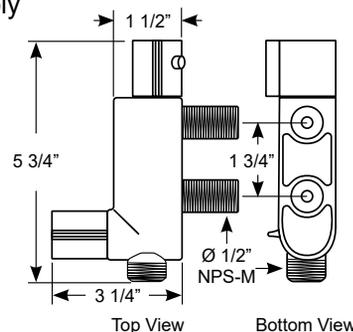

## Shower Valves / Mixing Bridges



#10015 1/2" Adapter Included

**Bridge Mixers** with attachment for a shower hose. Quality chrome plated brass bodies with durable ABS knobs. Hose attachment threads swivel to any angle to make horizontal or vertical mounting easy. **#10015** 1/2" adapter included.

**Water Connection:** 3/8" BSP threaded shafts with 1/2" NPS-M Delrin adapters included (**#10015**)

**Shower Hose Connection:** 3/8"

**Material:** Chrome plated brass body with ABS or acrylic knobs


**Mounting Holes:** (2) 5/8"

**Shipping Weight:** 4 lbs.

**#10411** Mixer with chrome ABS knobs

**#10401** Mixer with clear acrylic knobs

**#10062** Mixer with chrome ABS triangular knobs



#10015 1/2" Adapter Included

Low-profile mixing bridge with 1/4 turn ceramic valves. Hose attachment swivels to any angle for vertical or horizontal installation. **#10015** 1/2" adapter included.

**Water Connection:** 3/8" BSP threaded shafts with 1/2" NPS-M Delrin adapters included


**Shower Hose Connection:** Rotating 3/8"

**Material:** Chrome plated brass

**Mounting Hole:** (2) 5/8"

**Shipping Weight:** 4 lbs.

**#10467** Chrome plated brass

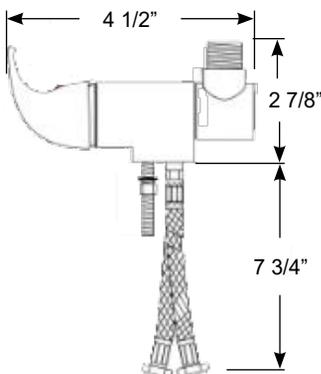

**Single Lever** mixing bridge. Features inward opening valve handle to prevent accidental opening in rough conditions while underway. Hose attachment swivels to any angle for greater flexibility.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Shower Hose Connection:** Rotating 3/8"

**Material:** Chrome plated brass

**Mounting Hole:** 1"

**Shipping Weight:** 4 lbs.

**#10813** Chrome plated brass



## Shower Valves



**Compact T-handle Shower Mixer.** Side to side movement controls water flow and rotating clockwise or counterclockwise controls temperature.


**Water Connection:** 1/2" NPS-F flexible supply lines, 3/8" BSP-M fitting for connection to shower hose

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 3 lbs.

**#10617** Chrome Plated T-handle Mixer



**Single Lever Mixing Valve WITH or WITHOUT** an on/off control. #16420 and #10624 operate by lifting the handle however, #10623 mixer is designed for use with the water pressure turned on simply rotate the valve to adjust the temperature.

**Water Connection:** 1/2" NPS-F flexible supply lines, 3/8" BSP-M fitting for connection to shower hose

**Material:** Chrome plated brass


**Mounting Hole:** 1-1/4"

**Shipping Weight:** 3 lbs.

**#10623** Chrome **WITHOUT** ON/OFF control

**#10624** PVD Coating with ON/OFF control

**#16420** Chrome with ON/OFF control

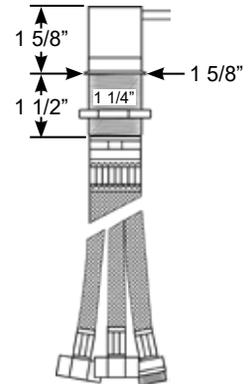

**Compact** single lever shower mixer. Flexible 3/8" BSP-M output line for hose connection.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass or white powder coat

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 3 lbs.


**#10500** Chrome

**#10501** Chrome with 1/2" NPS-F output

**#10504** Chrome with 2 x 10956 15mm speedfit fittings

**#10615** White

**#10625** White with 2 x 10956 15mm speedfit fittings




**SLANT Family Mixer**

**Water Connection:** 1/2" NPS-F flexible supply lines, 3/8" BSP-M fitting for connection to shower hose

**Material:** Chrome plated brass

**Mounting Hole Mixer:** 1-1/4"

**#07037** Mixer only



**Elka Geometric Bulkhead Mixer.** Ceramic valve cartridge.


**Water Connection:** 1/2" NPS-F flexible supply lines, 3/8" BSP-M fitting for connection to shower hose

**Material:** Chrome Plated Brass


**Mounting Hole:** 1-1/4"

**Shipping Weight:** 4 lbs.

**#16050** Chrome Plated Mixer



# Shower Valves




**Single Lever Shower Mixer** with large trim ring. Includes 3 x 15 mm speedfit fittings (#10956) for hot and cold supply connection.

**Water Connection:** 1/2" NPS-F with (3) 15mm PEX speedfit fittings included.  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-5/8"  
**Shipping Weight:** 5 lbs.



**#10487** Chrome Includes (3) 15mm PEX speedfit fittings

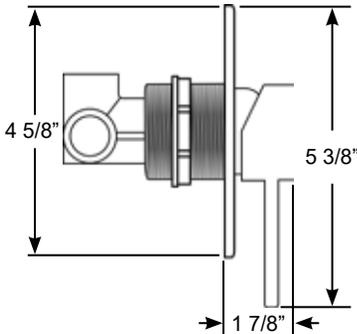


**Single Lever Shower Mixer** with large trim ring.

**Water Connection:** 1/2" NPS-F with (3) PEX speedfit fittings (#10956) included  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-5/8"  
**Trim Ring Diameter:** 4-5/8"  
**Shipping Weight:** 5 lbs.



**#10502** Chrome Plated Single Lever Mixer




Projection 3 3/4"

**Nordic Bulkhead Mount Shower Mixer.**  
 Requires securing fixture inside bulkhead. Installation requires 2-3/4" behind front of bulkhead.

**Water Connection:** 1/2" NPS-F  
**Material:** Chrome plated brass  
**Mounting Hole:** 2"  
**Shipping Weight:** 5 lbs.



**#70105** Chrome Plated Bulkhead Mount Mixer

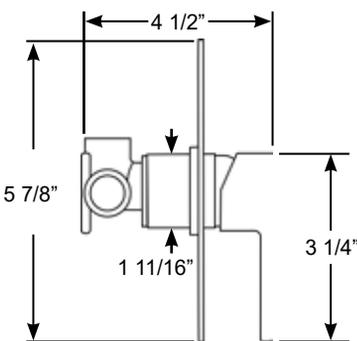


**Yo Bulkhead Mount Shower Mixer** with large square trim plate. Requires securing fixture inside bulkhead. Installation requires 2-3/4" behind front of bulkhead.

**Water Connection:** 1/2" NPS-F  
**Material:** Chrome plated brass  
**Mounting Hole:** 2"  
**Shipping Weight:** 5 lbs.



**#70602** Chrome Plated Bulkhead Mount Mixer

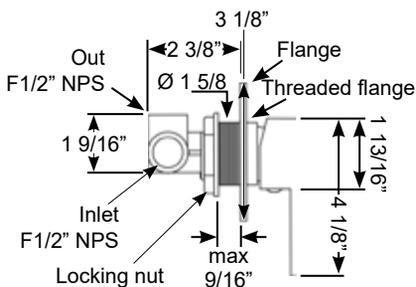

**Sable Family Bulkhead Mixer**

**Water Connection:** 1/2" NPS-F inlet and mixed output  
**Material:** All brass with a matte black finish  
**Mounting Hole:** 1-5/8"  
**Shipping Weight:** 4 lbs.

**#45120** Sable Single Lever Shower Mixer



# Shower Valves



**Mini-Compact Mixer**, supplied with fittings for 3/8" BSP-M and 1/2" NPS-M hose attachment.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 4 lbs.

Hose Attachment Fittings



#16201 Chrome Mini-Compact Mixer




**NEW Single Lever Shower Mixer** with an extended reach. Can be mounted on bulkhead or counter. 3/8" BSP-M flexible output supply line for hose connection.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fitting, hose connection 3/8" BSP-M

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/8"

**Shipping Weight:** 4 lbs.

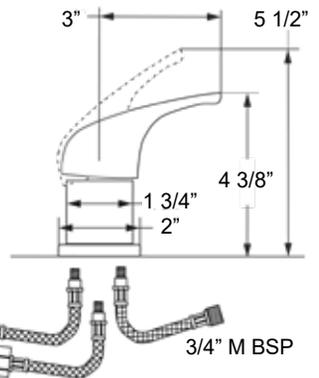

#10460 Chrome Plated Single Lever Mixer





**NEW Single Lever Shower Mixer with Hose Connection.** Can be mounted on bulkhead or counter. Supplied with fittings for 3/8" BSP-M and 1/2" NPS-M hose attachment.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fitting, hose connection 3/8" BSP-M

**Material:** Chrome plated brass

**Mounting Hole:** 1 1/2"

**Shipping Weight:** 4 lbs.

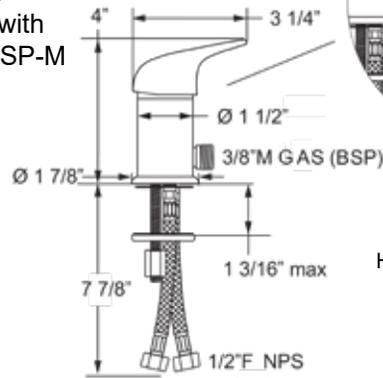

#10464 3/8" BSP-M hose connection

#10465 1/2" BSP-M hose connection

Hose Attachment Fittings




**Single Lever Shower Mixer** with an extended reach. Can be mounted on bulkhead or counter. 3/8" BSP-M flexible output supply line for hose connection.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fitting, hose connection 3/8" BSP-M

**Material:** Chrome plated brass


**Mounting Hole:** 1-1/8"

**Shipping Weight:** 4 lbs.



#10466 Chrome Plated Single Lever Mixer


# Shower Valves

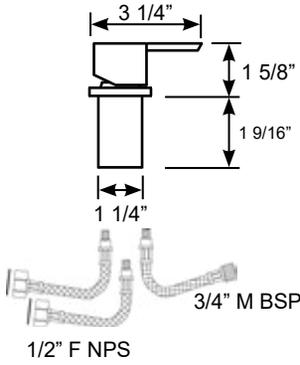

**Elka Geometric Bulkhead Mixer.** Ceramic valve.  
**Water Connection:** Flexible supply lines with 1/2" NPS-F fitting, hose connection 3/8" BSP-M  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-1/4"  
**Shipping Weight:** 3 lbs.




**#16251** Brushed Mixer (Shown)  
**#16253** Chrome Mixer



**Elka Geometric Bulkhead Mixer.** Ceramic valve.  
**Water Connection:** 1/2" NPS-F fittings. 15mm Speedfit adapters included  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-5/8"




**#70499** Chrome Plated Geometric Mixer



**Single Lever Shower Mixer** with compact trim ring.  
**Water Connection:** 1/2" NPS-F with 1/2" hose barb or 15mm PEX speedfit fittings.  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-5/8"  
**Shipping Weight:** 4 lbs.



**#10479** Includes (3) 1/2" hose barb fittings  
**#10507** Includes (3) 15mm PEX speedfit fittings



**Low Profile Shower Mixer.**  
**Water Connection:** Flexible supply lines with 1/2" NPS-F fitting, hose connection 3/8" BSP-M  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-5/8"  
**Shipping Weight:** 3 lbs.



**#16205** Chrome (Shown)  
**#16265** Brushed

Requires 4 1/2" Depth for installation of supply lines



# Shower Valves



**NEW** Improved, **Nordic Stainless Steel Shower Mixer** design with a front trim ring and adjustable mounting nut for easily securing to any bulkhead.


**Water Connection:** 1/2" NPS-F  
**Material:** 304 Stainless Steel, Brushed Finish  
**Mounting Hole:** 1-7/8"  
**Shipping Weight:** 4 lbs.

**#74140** Nordic Stainless Steel Shower Mixer

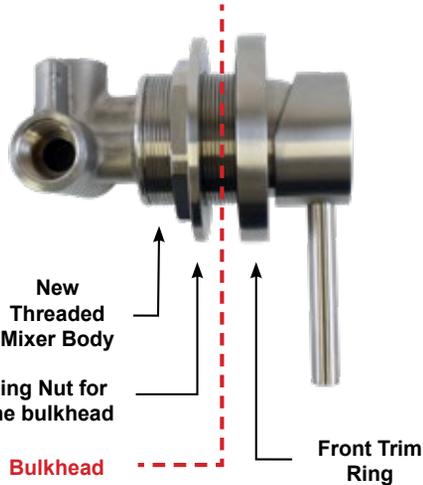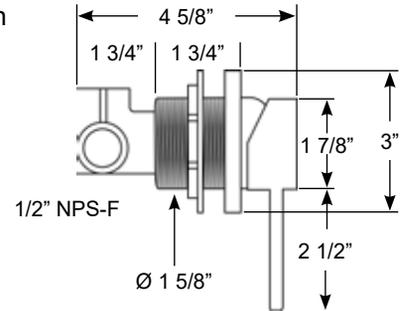

**Elka Geometric Bulkhead Mixer.** Ceramic valve.  
**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings with captive washers, both input and output.  
**Material:** Chrome Plated Brass  
**Mounting Hole:** 1-1/4"  
**Shipping Weight:** 4 lbs.


**#70510** Chrome Plated Geometric Mixer

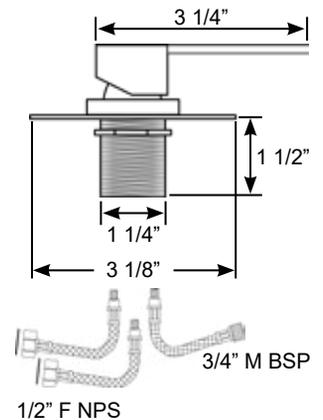


**Elka Otto Bulkhead** or top mount single lever shower mixer.

**Water Connection:** 1/2" NPS-F  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-5/8"  
**Shipping Weight:** 5 lbs.

**#16316** Chrome Plated Single Lever Mixer



## Shower Valves/ Diverters



### SLANT Family Diverter with ceramic valve


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 5 lbs.

**#07039**

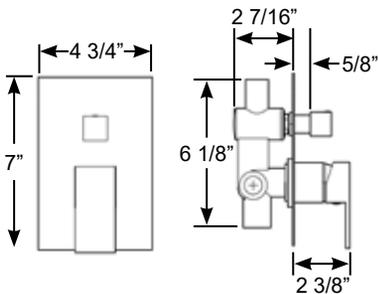


### Farley Family Bulkhead Shower Mixer with Diverter ceramic valve.

**Water Connection:** 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-5/8" square & 3/4 diameter

**#16300** Chrome Plated Brass Mixer with Diverter

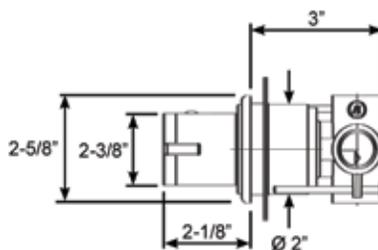

**Elka Diverter** for directing water from a mixer to either of two shower fixtures. Requires securing fixture inside bulkhead.

**Water Connection:** Input 1/2" NPS-M fitting, Output (2) NPS-F fittings.

**Material:** Chrome plated brass body and escutcheon with chrome plated ABS knob.

**Mounting System:** Flange and screws


**Mounting Hole:** 2-1/8"

**Shipping Weight:** 5 lbs.

**#16206** Chrome Plated Brass ABS knob



## Bulkhead Connections

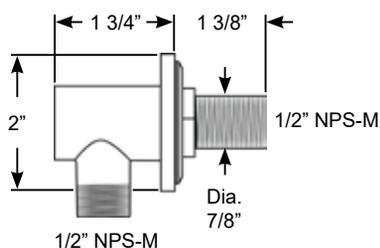

### NEW Stainless Steel Bulkhead Elbow Connector

**Water Connection:** 1/2" NPS-M

**Material:** 304 Stainless Steel, Brushed Finish

**Mounting Hole:** 7/8"

**Shipping Weight:** 2 lbs.

**#74165** 304 Stainless Steel Connector



# Bulkhead Connections




## NEW 304 Stainless Steel Bulkhead Elbow and Shower Wand Holder

Bulkhead fitting provides an easy solution to route plumbing through the bulkhead while providing a holder for straight sprayer handles. This combination unit eliminates the need for a shower rail. Perfect for smaller shower stalls. 1/2" water supply connection behind bulkhead coupled with a 1/2" shower hose connection for a universal application.

**Water Connection:** 1/2" NPS-M  
**Material:** 316 Stainless Steel, Brushed Finish  
**Mounting Hole:** 7/8"  
**Shipping Weight:** 2 lbs.


#74166 316 Stainless Steel, Brushed Finish

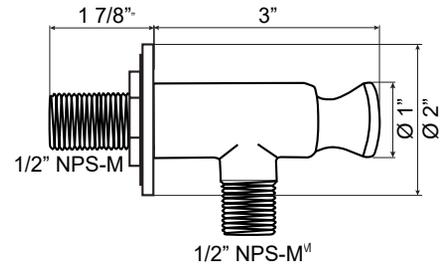

**Contemporary Bulkhead Connection** for shower hose.

**Water Connection:** 1/2" NPS-M  
**Hose Connection:** 1/2" NPS-M  
**Material:** Chrome plated brass  
**Shipping Weight:** 1 lb.


#70604 Chrome Plated Brass Connection

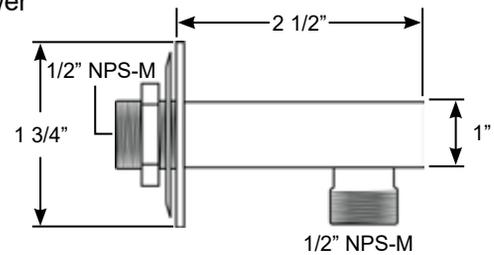

**Contemporary Bulkhead Connection** for shower hose.

**Water Connection:** 1/2" NPS-M, 1-1/2" long.  
**Hose Connection:** 1/2" NPS-M  
**Material:** Chrome plated brass  
**Shipping Weight:** 1 lb.


#15948 Chrome Plated Brass Connection

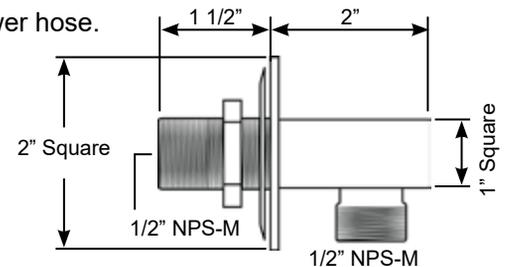

**Compact Bulkhead Connection** for shower hose.

**Water Connection:** 3/8" BSP threaded shaft with 1/2" NPS-M nylon adapter included  
**Hose Connection:** 3/8" BSP-M or 1/2" NPS-M  
**Material:** Chrome plated brass  
**Mounting Hole:** 5/8"  
**Shipping Weight:** 1 lb.

#10003 3/8" BSP-M hose connection  
 #10007 1/2" NPS-M hose connection

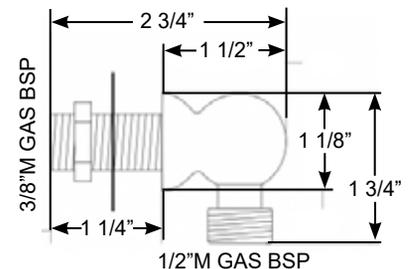


3/8" BSP with 1/2" NPS-M adapter included #10015



## NEW Sable Bulkhead Elbow

**Water Connection:** 3/8" BSP-M threaded shaft with 1/2" NPS-M nylon adapter included  
**Hose Connection:** 1/2" NPS-M  
**Material:** All brass with a matte black finish  
**Mounting Hole:** 3/4"  
**Shipping Weight:** 1 lbs.

#45130 Brass with Matte Black Finish

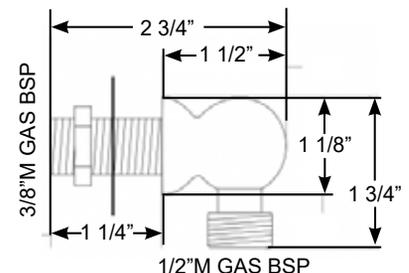

3/8" BSP-F to 1/2" NPS-M adapter included #10015



# Combination Fixtures



Our popular **EURO** styled handle and **STANDARD TRIGGER** handle both offer trigger control for intermittent on/off or locked open for a continuous water flow. Ceramic valves.

**See page 36 for #10650 bulkhead holder for ELBOW shower handles.**

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass faucet body; standard knob - chrome plated brass; triangle knob - chrome ABS; Euro sprayer handle - chrome plated brass and ABS; Standard Trigger handle - chrome plated brass and glass reinforced nylon.

**Mounting Hole:** 1-1/2"


**Shipping Weight:** 6 lbs.

**Standard combo with Euro handle (shown above):**

- #46013 White handle with 5' white nylon hose
- #46014 Black handle with 5' black nylon hose
- #46015 Chrome handle with 5' white nylon hose
- #46016 Chrome handle with 5' black nylon hose
- #46017 White handle with 5' chrome flex hose
- #46018 Black handle with 5' chrome flex hose
- #46019 Chrome handle with 5' chrome flex hose

**Same as above with Triangle Knob:**

- #46020 White handle with 5' white nylon hose
- #46021 Black handle with 5' black nylon hose
- #46022 Chrome handle with 5' black hose
- #46023 Chrome handle with 5' white hose

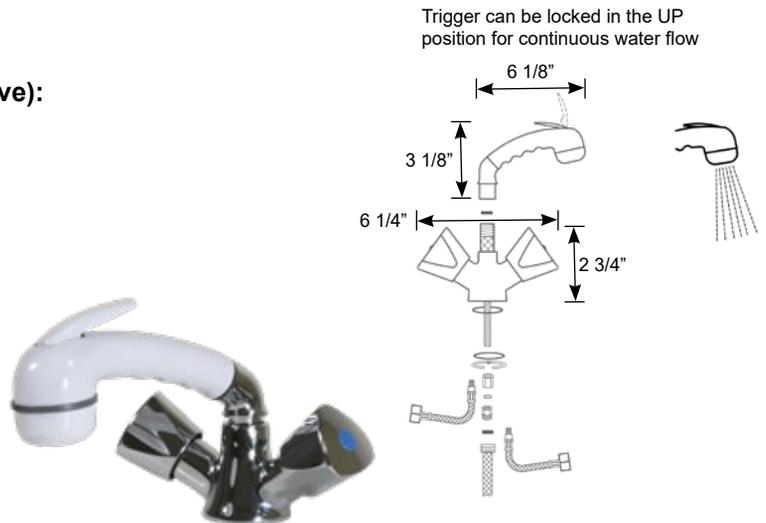


**Standard Trigger Combo**

- #46004 White handle with 5' chrome flex hose
- #46005 Black handle with 5' chrome flex hose
- #46006 White handle with 5' white nylon hose
- #46007 Black handle with 5' black nylon hose




Trigger can be locked in the UP position for continuous water flow

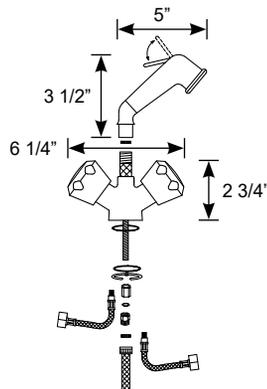

## Combination Fixtures



Aerated water flow or shower

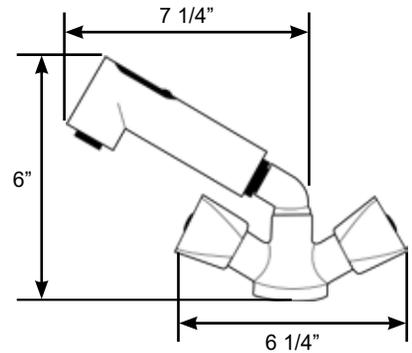

Combination faucet and shower with 5' pull-out hose. Press the button on back of handle to switch between aerated water flow or shower spray. 1/4 turn ceramic valves.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Chrome plated brass body with chrome ABS sprayer handle  
**Mounting Hole:** 1-1/2"  
**Shipping Weight:** 5 Lbs.

- #46030 with 5' White nylon hose
- #46031 with 5' Black nylon hose
- #46032 with 5' Chrome Flex hose




#46036 with 5' Chrome Flex Hose




- #46033 with 5' White nylon hose
- #46034 with 5' Black nylon hose
- #46035 with 5' Chrome Flex hose



Aerated water flow or shower

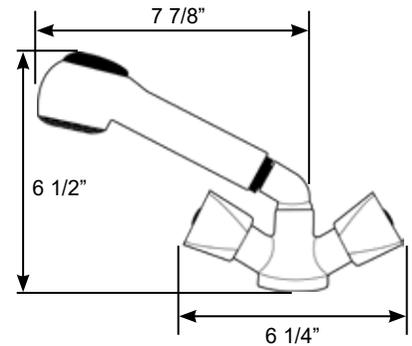

Aerated water flow or shower

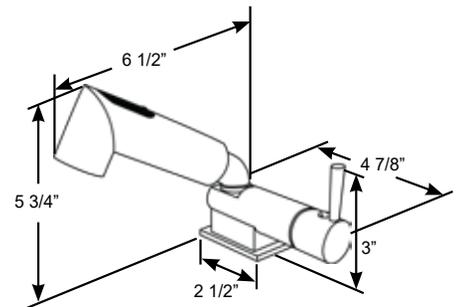

**Minimalistic** single lever design combination faucet and shower mixer. Press the button on back of handle to switch between aerated water flow or shower spray. Ceramic valve. Features inward opening valve handle to prevent accidental opening in rough conditions while underway.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Chrome plated brass body with chrome ABS sprayer handle  
**Mounting Hole:** (2) 1-1/4" holes, 1-1/16" center to center. Cutting template included  
**Shipping Weight:** 5 Lbs.

- #16216 with 5' Nylon Braid Hose (#15995)
- #16218 with 5' Chrome Flex Hose (#10271)



#16217 Slant Family with 5' nylon braided hose(#15995)

## Combination Fixtures


**Minimalistic** single lever design combination faucet and shower mixer. Features inward opening valve handle to prevent accidental opening in rough conditions while underway.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass body. Sprayer handle with 5' chrome-flex hose


**Mounting Hole:** (2) 1-1/4" holes, 1-1/16" center to center. Cutting template included

**Shipping Weight:** 5 Lbs.

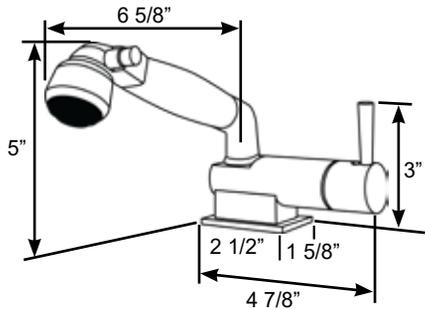


#14417 White on/off valve handle

#14419 Black on/off valve handle




Aerated water flow or shower

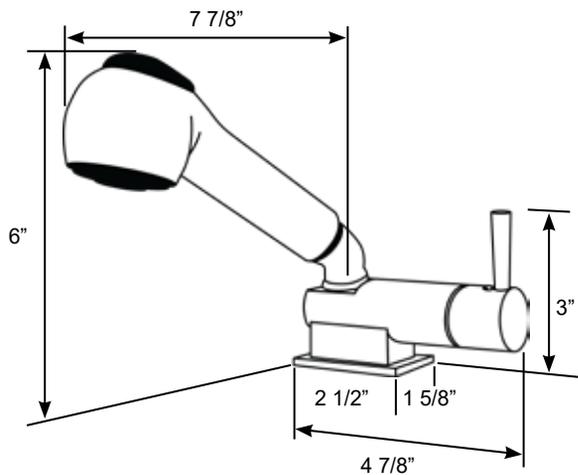

#14410 Chrome ABS combination handle



Aerated water flow or shower

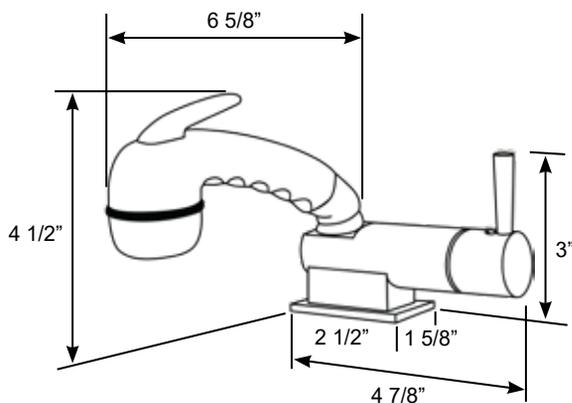

#14414 Chrome ABS Euro handle

Trigger UP for continuous water flow



Shower Flow



# Combination Fixtures

Plumbing



These fixtures are perfect for compact bathrooms as they act as a **shower and basin faucet in one!** Adjustable spray aerator lets you choose between faucet flow or shower spray. Handle with a built-in on/off valve will help reduce water usage.  
**See page 36 for #10650 bulkhead holder for ELBOW shower handles.**

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass faucet body; standard knob - chrome plated brass; triangle knob - chrome ABS, sprayer handle - chrome plated brass; chrome ABS aerator with ABS grip


**Mounting Hole:** 1-1/2"

**Shipping Weight:** 6 lbs.

- #46009** White handle with 5' chrome flex hose
- #46010** Black handle with 5' chrome flex hose
- #46011** White handle with 5' white nylon hose
- #46012** Black handle with 5' black nylon hose


**Same as above with Triangle Knob:**

- #46024** White handle with 5' chrome flex hose
- #46025** Black handle with 5' chrome flex hose
- #46026** White handle with 5' white nylon hose
- #46027** Black handle with 5' black nylon hose
- #46029** Black handle with 6" chrome flex hose

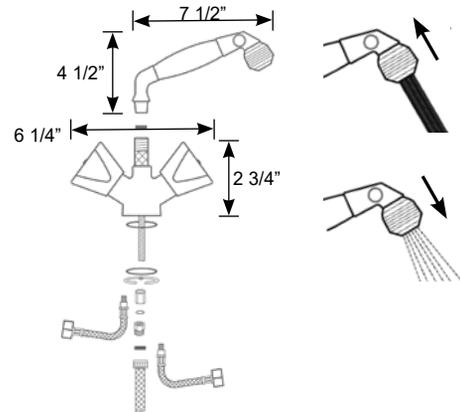

## Standard combo and shower handle **WITHOUT** on/off valve

- #46000** White handle with 5' white nylon hose
- #46001** Black handle with 5' black nylon hose
- #46002** White handle with 5' chrome flex hose
- #46003** Black handle with 5' chrome flex hose

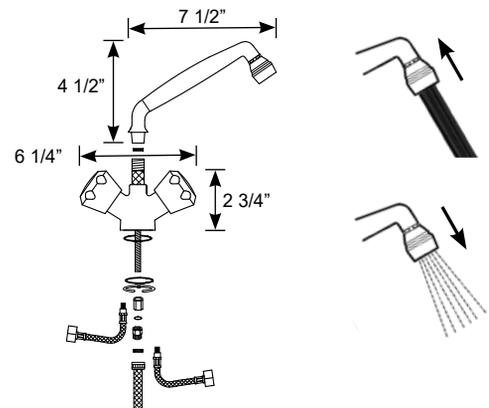

## Cold Water Combination Fixtures



Aerated water flow or shower

**COLD WATER** faucet and shower combination with adjustable aerator and built-in water on/off valve. 1/4 turn ceramic valve.

**Water Connection:** Flexible supply line with 1/2" NPS-F input fitting and 3/8" BSP-M output fitting to hose.

**Material:** Chrome plated brass

**Shipping Weight:** 4 lbs.

- #14411 Black handle with 5' black nylon hose
- #14412 White handle with 5' white nylon hose
- #14415 Black handle with 5' chrome-flex hose
- #14416 White handle with 5' chrome-flex hose



Aerated water flow or shower

**COLD WATER** faucet and shower combination. Press button on handle to switch from aerator flow to shower spray.

**Material:** Chrome plated brass, Chrome ABS handle.

- #14406 with 5' white hose
- #14407 with 5' black hose
- #14408 with 5' chrome flex hose




Shower Flow

**COLD WATER** faucet and shower combination with standard trigger handle. Ceramic valve.

**Material:** Chrome plated brass, glass reinforced nylon handle

- #14413 White handle with 5' white nylon hose
- #14405 Black handle with 5' chrome flex hose

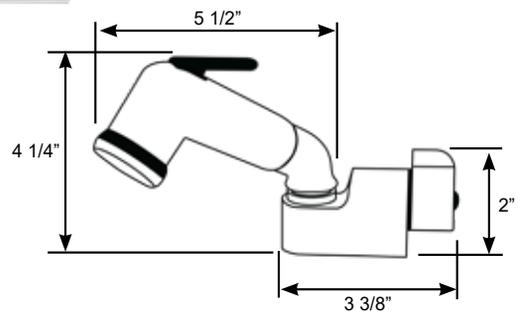

# Pull OUT Galley Faucets




**Minimalistic** compact mixer for bar or galley. Swivel, ejectable handle with push-button spray selector between straight flow and shower spray. Handle pulls out 3'. Includes 5' braided hose and return weight.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Mounting Hole:** 1-1/2"  
**Shipping Weight:** 6 lbs.  
**Material:** Chrome Plated Brass

#14423 Chrome Plated



Aerated water flow or shower

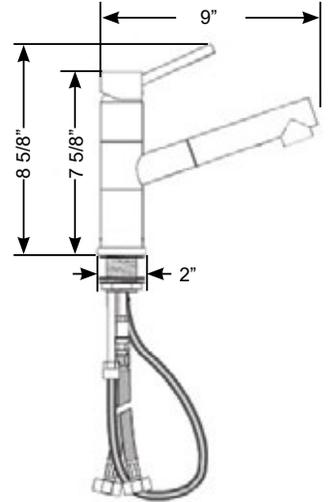

## Nordic Family Pull-Out Galley Mixer


Made of durable, low maintenance Passivated 304 Stainless Steel. This light weight faucet is perfect for galley or bar installation. Spout does **NOT** swivel.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Passivated 304 Stainless Steel, Brushed Finish  
**Mounting Hole:** 1-1/4"  
**Shipping Weight:** 5 lbs.

#74122 Brushed



Spray Pattern

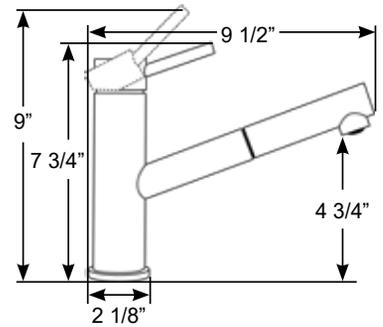


**NEW Elka Minimalistic Pull-Out Galley Mixer with Swivel Spout.** These high quality **316 Stainless Steel** low maintenance fixtures are perfect for aft deck or exterior applications

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** **316 Stainless Steel**  
**Mounting Hole:** 1 1/2"  
**Shipping Weight:** 6 lbs.


#16615 Brushed  
 #16715 Polished



Aerated water flow or shower

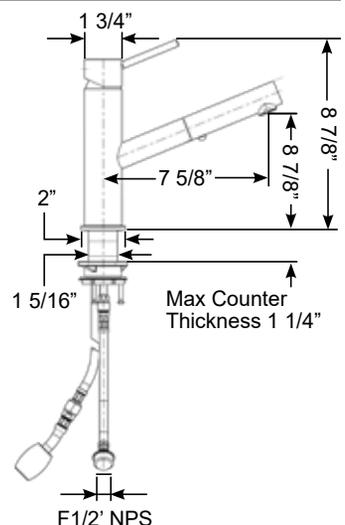

## Pull OUT Galley Faucets



**Compact** galley or basin faucet with pull-out handle. 5' chrome-flex hose. This faucet does **NOT** swivel. Ceramic valve.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass, chrome ABS handle


**Mounting Hole:** 1-1/2"

**Shipping Weight:** 6 lbs.

**#10881** Chrome Plated Brass, ABS Handle



Aerated water flow or shower



Basin mixer with pull-out handle. Push button compact galley or spray pattern adjustment located on handle. 5' chrome flex hose. This faucet does **NOT** swivel. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass, chrome ABS plastic handle


**Mounting Hole:** 1-1/2"

**Shipping Weight:** 6 lbs.

**#10880** Chrome Plated Brass, ABS Handle



Aerated water flow or shower

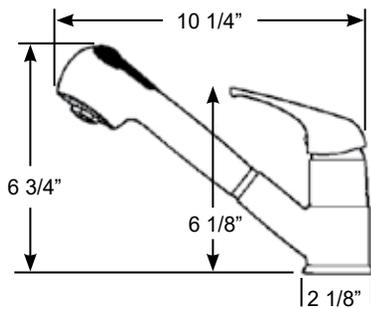

**Single Lever** swivel spout galley mixer with pull-out sprayer. Push-button spray pattern adjustment located on spray handle. 5' chrome-flex hose. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings


**Material:** Chrome plated brass body; chrome ABS plastic handle

**Mounting Hole:** 1-1/2"

**Shipping Weight:** 6 lbs.

**#10871** Chrome Plated Brass, ABS Handle

**#10626** Includes (2) 15mm Speedfit Adapters  
**#10956**



Aerated water flow or shower



# Pull OUT Galley Faucets




**Elka Bambu Pull-Out Galley Mixer with Swivel Spout.** Push-button spray selector between straight flow or shower spray. Ceramic cartridge.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass body, ABS Handle  
**Mounting Hole:** 1-1/2"

#07023 Chrome


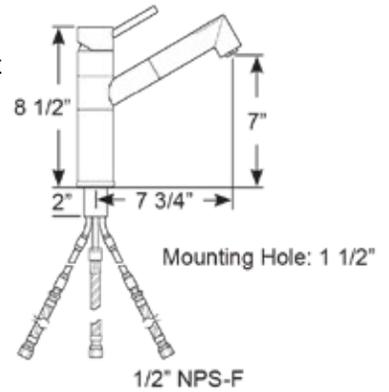


**Nordic Family, Chrome Galley Faucet with Ejectable Handle.** Tall J spout provides 9 5/8" of clearance from spout tip to the counter top. Single lever water control is mated to a ceramic valve cartridge for trouble free operation.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass  
**Mounting Hole:** 1-1/2"  
**Shipping Weight:** 4 lbs.

#07032 Chrome

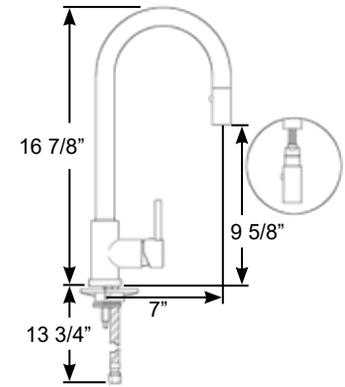



**NEW Elka Minimalistic Pull-Out Galley Mixer with Swivel Spout.** Manufactured from marine grade **316 Stainless Steel** for a lifetime of durability and maximum resistance to rust, pitting, and chemical corrosion.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** **316 Stainless Steel** body and handle  
**Mounting Hole:**

#16616 Brushed  
#16716 Polished

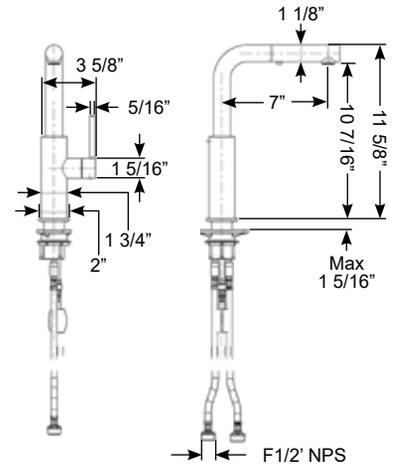

# Galley Faucets



**Elka Minimalistic Galley Faucet**, multi-chambered spout with integrated **RAW** or **FILTERED** water dispenser.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Filtered or salt water connection:** Flexible supply line with 3/8" NPS-M fitting


**Material:** Chrome plated brass

**Mounting Hole:** 1-5/16"

**Shipping Weight:** 8 lbs.

**#16002** Shown

**#16062** Brushed (Special Order)

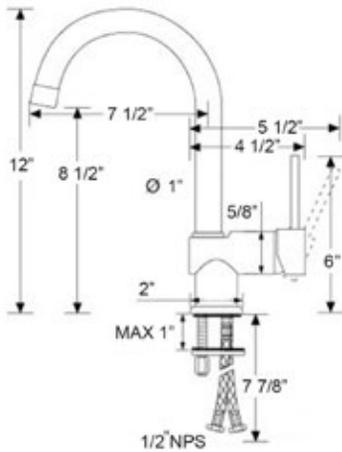

**Nordic J-spout Swivel Galley Mixer with Side Handle**


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/2"

**Shipping Weight:** 5 lbs.

**#70104** Chrome

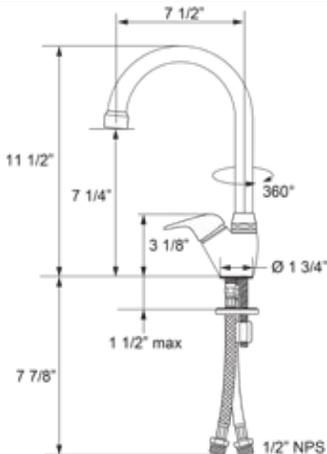

**Single Lever U-shaped Swivel Spout Galley Mixer.**

Ideal for large or double sinks.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 6 lbs.

**#10637** Chrome




# Galley Faucets



**NEW** Manufactured from marine grade **316 Stainless Steel** for a lifetime of durability and maximum resistance to rust, pitting, and chemical corrosion.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** **316 Stainless Steel**  
**Mounting Hole:**  
**Shipping Weight:**


**#16610** Brushed  
**#16710** Polished

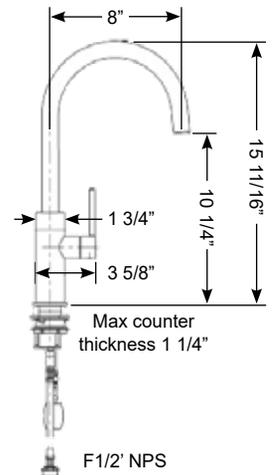

**NEW** Manufactured from marine grade **316 Stainless Steel** for a lifetime of durability and maximum resistance to rust, pitting, and chemical corrosion.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** **316 Stainless Steel**  
**Mounting Hole:**  
**Shipping Weight:**


**#16622** Brushed  
**#16722** Polished

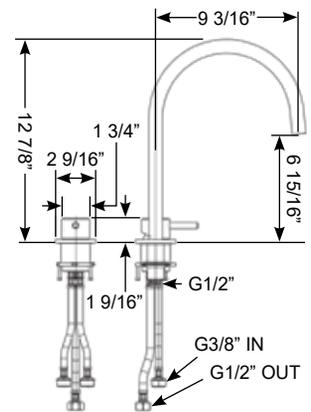

**Minimalistic** Compact Mixer for basin or small galley with swivel spout. Spout does **NOT** pull out. Ceramic valve. Spout tip rotates 360° left/right.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-1/2"  
**Shipping Weight:** 5 lbs.


**#14421** (Shown)  
**#14424** 3" shorter spout

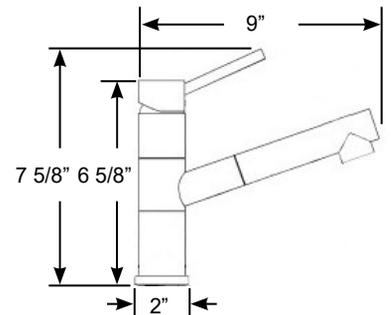


**Nordic Galley Mixer** Made of durable, low maintenance Passivated 304 Stainless Steel. This light weight faucet is perfect for galley or bar installation. Spout does **NOT** swivel. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Passivated 304 Stainless Steel, Brushed Finish  
**Mounting Hole:** 1-1/4"  
**Shipping Weight:** 5 lbs.

**#74121** Brushed 304 Stainless Steel

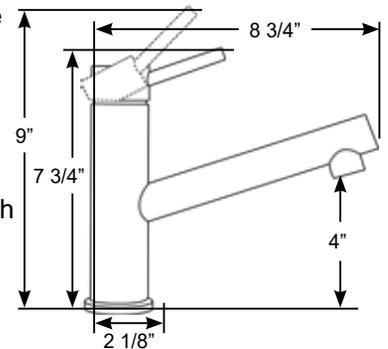

## Galley Faucets

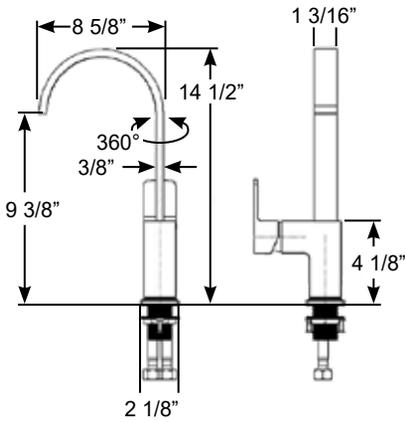

### Yo Swivel J-Spout Galley Mixer

The J-Spout offers a sleek, modern look that fits well in any contemporary galley. The high arc provides more space under the spout for larger pots. Ceramic valve.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 6 lbs.

**#70601** Chrome Plated Brass

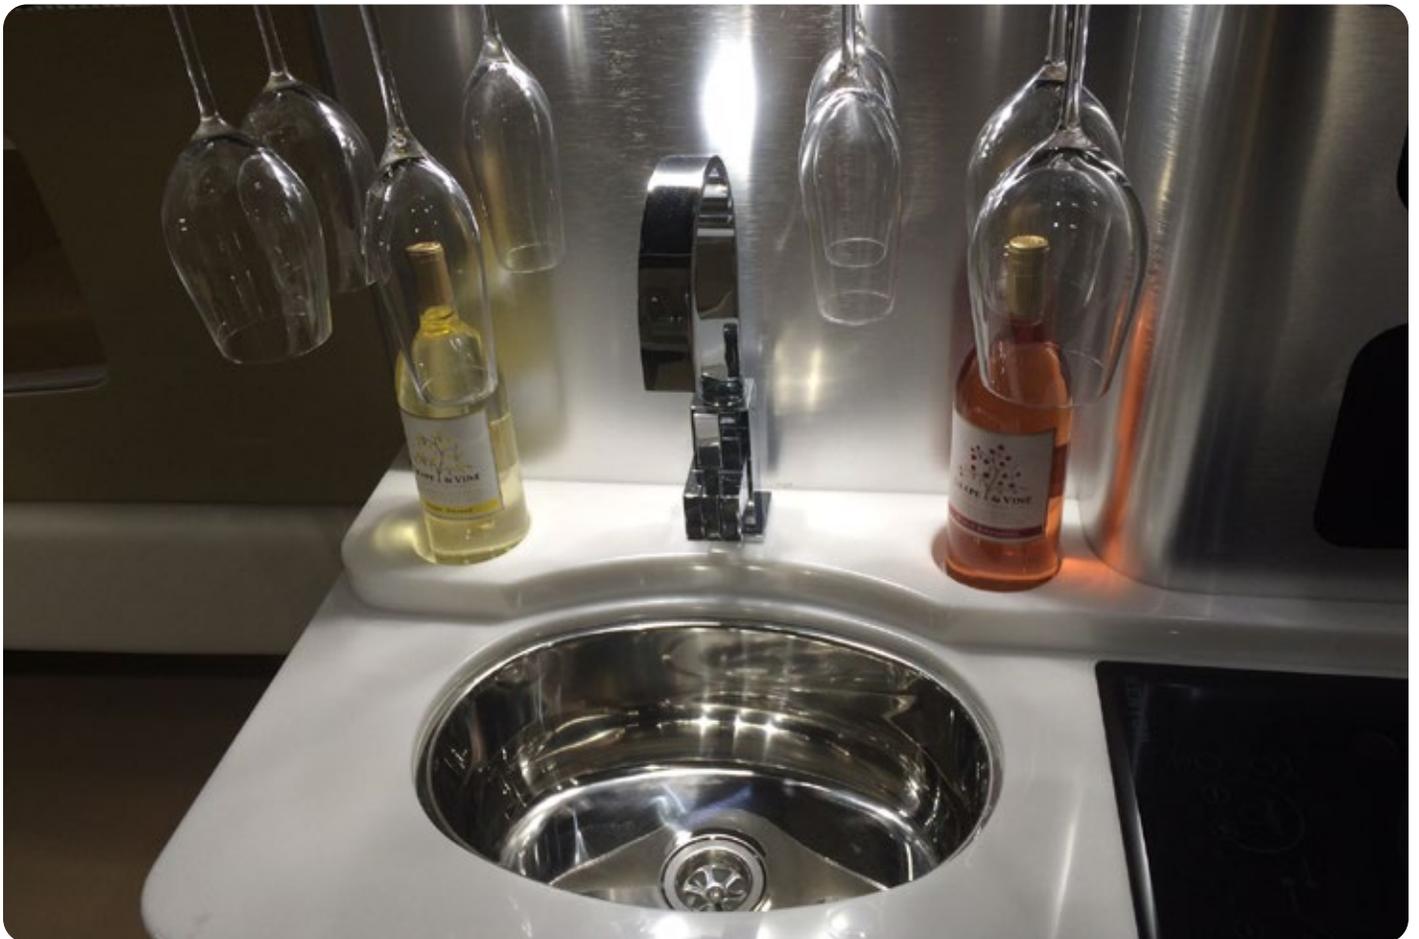




# Galley Faucets




## Single Lever Brushed Finish Galley Mixer with Swivel Spout

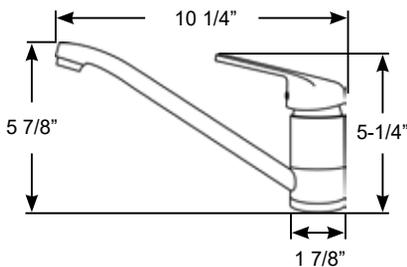

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Passivated 304 Stainless Steel, Brushed Finish  
**Mounting Hole:** 1-1/2"  
**Shipping Weight:** 5 lbs.


**#74130** Brushed 304 Stainless Steel

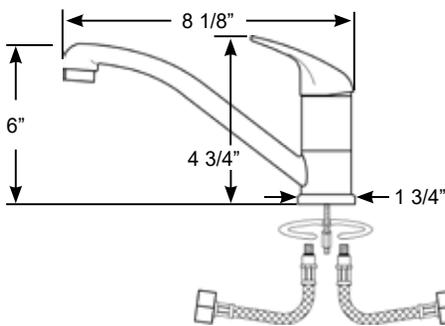

**Single Lever Basin** or small galley mixer. Swivel Spout with ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-1/4"  
**Shipping Weight:** 4 lbs.

**#10480** Chrome Plated Mixer

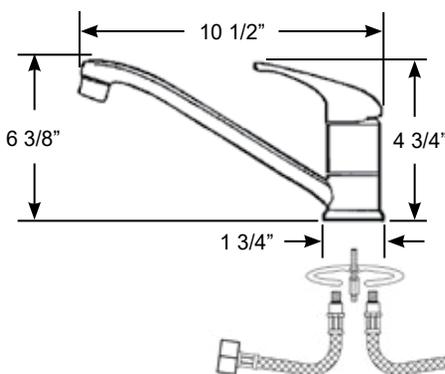

**Single Lever Swivel Spout Galley Mixer** with ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-1/4"  
**Shipping Weight:** 6 lbs.

**#10488** Chrome Plated Mixer



# Galley Faucets



**Galley mixer with High-reach Swivel Spout.** Ceramic valves.

**Water Connection:** Flexible supply lines with 1/2 NPS-F fittings


**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 5 lbs.

**#10438** Standard knob

Spray Pattern

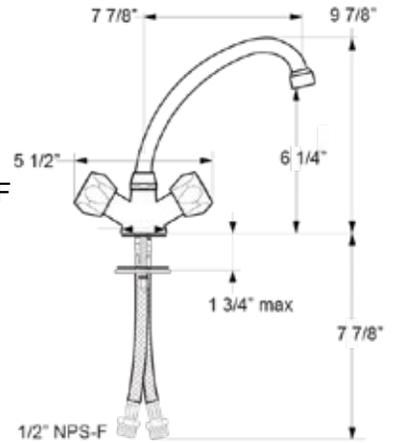

10422

Our most popular **Galley Mixer with Swivel Spout.** Ceramic valves.

**Water Connection:** Flexible supply lines with 1/2 NPS-F fittings

**Material:** Chrome plated brass; #10897 features chrome plastic triangular knobs


**Mounting Hole:** 1-1/4"

**Shipping Weight:** 5 lbs.

**#10422** Standard knob

**#10897** Triangle knob

Spray Pattern

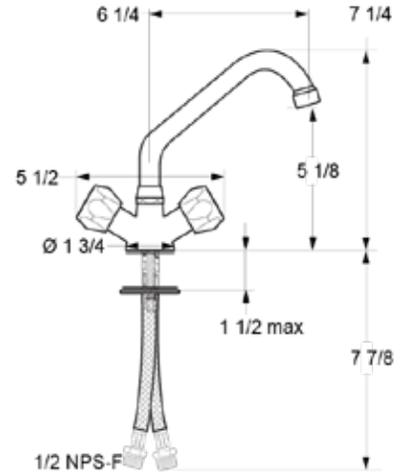

10897



6"

**Classic Swivel J-spout Galley Mixer.** Ceramic valves.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings


**Material:** Chrome plated brass

**Mounting Hole:** 1-3/8"


**Shipping Weight:** 4 lbs.

**#70002** Chrome Plated Mixer

Spray Pattern

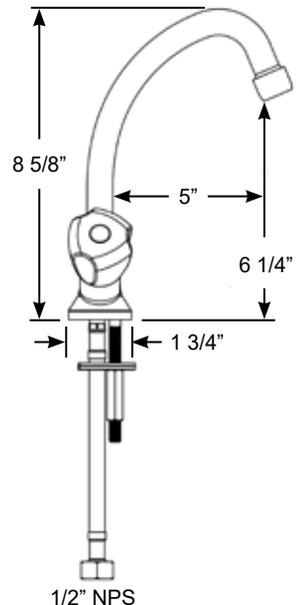

## Compact Galley or Basin Faucets

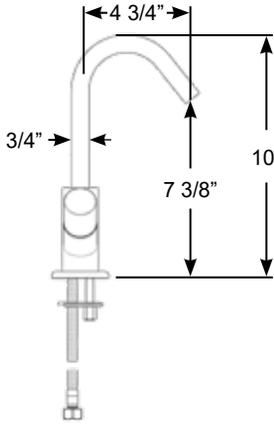

**Elka Otto Compact Galley or Basin Mixer.** Ceramic valves. Includes pop-up drain.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-3/4"

**Shipping Weight:** 6 lbs.

**#16311** Chrome Plated Mixer

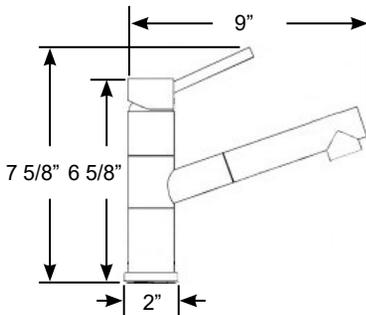

**Minimalistic Compact Mixer** for basin or small galley with swivel spout. Spout does **NOT** pull out. Ceramic valve. Spout tip rotates 360° left/right.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/2"

**Shipping Weight:** 5 lbs.

**#14424** 3" Spout

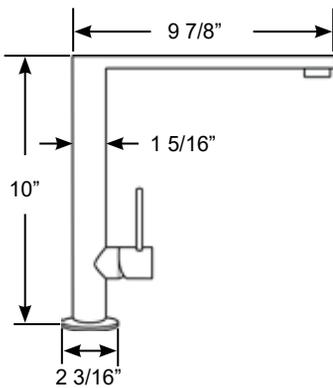

**Zen Galley Faucet mixer.** Tall and elegant, this ultra contemporary design with swivel spout will be just the faucet for the modern galley. Ceramic valve.

**Water Connection:** 9" Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-3/8"

**Shipping Weight:** 7 lbs.

**#16211** Chrome Plated Mixer

Also available in a shorter version see **#16210** on page 69





## Bulkhead Mixers



**Elka Geometric Family** design Bulkhead Mixer and Spout. Ceramic valve.

**Water Connection:** 1/2" NPS-F fittings on mixer.  
15mm Speedfit adapters included, 3/8" male on spouts  
**Material:** Chrome plated brass  
**Mounting Hole (Mixer):** 1-5/8"  
**Mounting Hole (Spout):** 5/8"



**#70502** Mixer with 4-3/4" Spout  
**#70503** Mixer with 7" Spout (Shown)

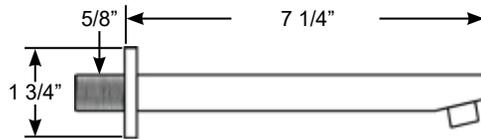

**Elka Mini-Compact** Bulkhead Mount Spout with Mixer and trim plate with BLUE LED accent on edge of trim plate. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Chrome plated brass  
**Mounting Hole:** 2"  
**Shipping Weight:** 5 lbs.

**#16202** 12V LED accent  
**#16203** Without LED accent

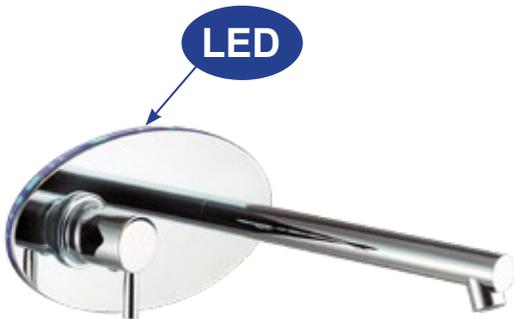

## Bulkhead Mixers






**NEW OTTO** Bulkhead Mount Spout with mixer and trim plate with ceramic valve.  
Mounts on vertical surfaces, saving space and providing a clean and modern look.

**Water Connection:** 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Shipping Weight:** 5 lbs.

**#16315** Chrome Plated Mixer

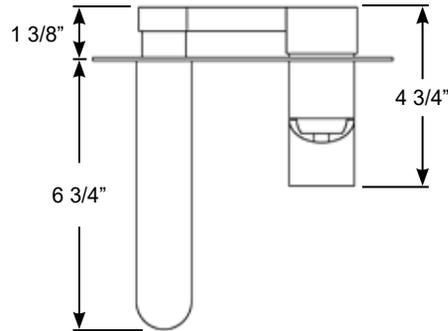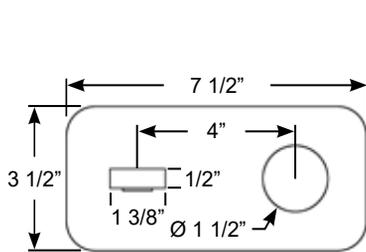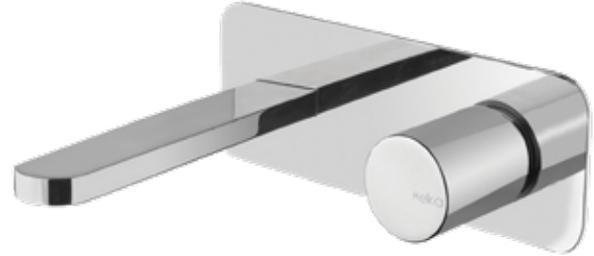

## High Reach Basin Faucets



**Elka Compact Mixer** for Basins or Small Galleys. Swivel spout. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings


**Material:** Chrome plated brass

**Mounting Hole:** 1-3/8"

**Shipping Weight:** 5 lbs.

**#16191** Chrome Plated Basin Mixer

Also available in a cold tap version see #16190 on page 76

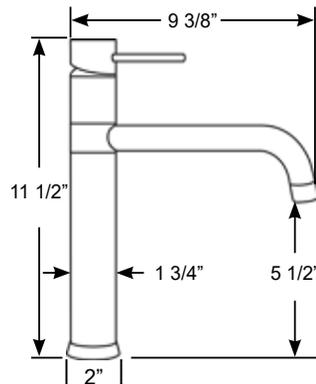

**Elka Otto** tall Single Lever Basin Mixer with long spout. This single lever raised deck faucet will compliment the style of contemporary vessel sink installations. Ceramic valve.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-5/8"

**Shipping Weight:** 6 lbs.

**#16313** Chrome Plated Single Lever Basin Mixer

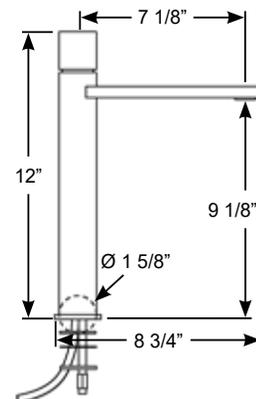

**NEW** Manufactured from marine grade **316 Stainless Steel** for a lifetime of durability and maximum resistance to rust, pitting, and chemical corrosion.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings


**Material:** **316 Stainless Steel**

**Mounting Hole:**


**Shipping Weight:**

**#16606** Brushed

**#16706** Polished

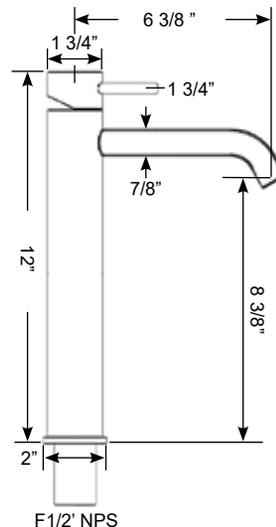

## High Reach Basin Faucets

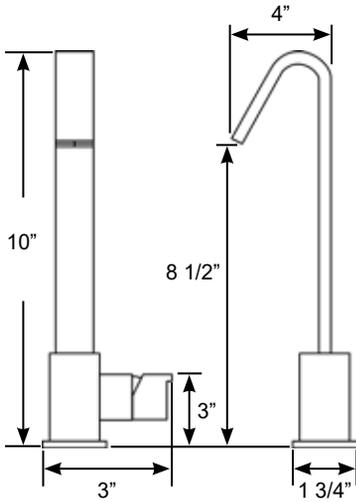

**Geometric Family** High Swivel Spout Mixer. Ceramic valve.

Features inward opening valve handle to prevent accidental opening in rough conditions while underway.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/8"

**Shipping Weight:** 5 lbs.

**#16007** Chrome Plated Swivel Spout Mixer

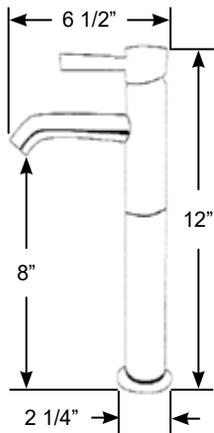

**Nordic Family** Raised Deck Mount Mixer for vessel sinks. Ceramic valve.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 2"

**Shipping Weight:** 5 lbs.

**#70108** Chrome Plated Raised Deck Mount Mixer

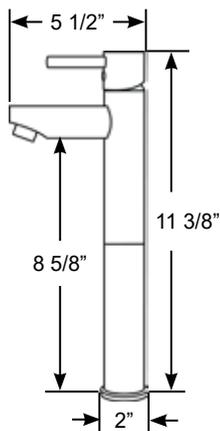

**Minimalistic** Raised Deck Mount Mixer for vessel sinks. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-3/8"

**Shipping Weight:** 5 lbs.

**#07006** Chrome Plated Raised Deck Mount Mixer



## Basin Faucets



**INN COLLECTION** Contemporary Closed Spout Basin Faucet. Other dimensions and finishes available by special order. Includes adjustable flow regulator. Ceramic valve. Mixer and Spouts ordered separately.

**Water Connection:** 1/2" NPS-F


**Shipping Weight:** Spout 5 lbs., Mixer 3 lbs.

**#16250** Brushed Spout (Shown)

**#16252** Chrome Spout

**#16251** Brushed Mixer (Shown)

**#16253** Chrome Mixer

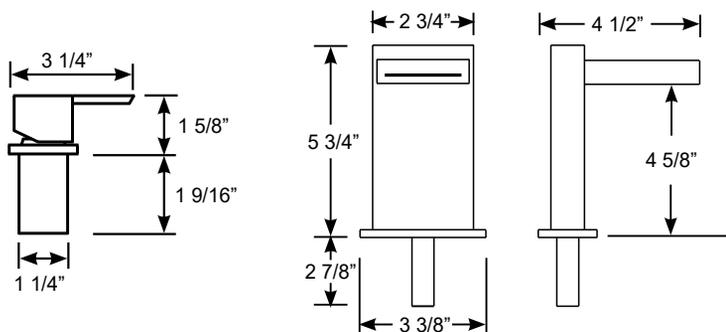

**Compact** Galley or Basin Mixer with Swivel Spout. Ceramic valve. Features an inward opening valve to eliminate accidental opening while underway.

**Water Connection:** 1/2"


**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"


**Shipping Weight:** 4 lbs.

**#16200** Chrome

**#16199** Brushed



## Basin Faucets

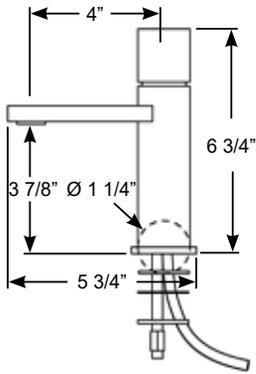

**Elka Otto** Single Lever Basin Mixer. Ceramic valve.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 5 lbs.

**#16312** Chrome Plated Single Lever Basin Mixer.



**Elka Zen** Basin Mixer. Spout does not swivel. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass


**Mounting Hole:** 1-1/4"

**Shipping Weight:** 4 lbs.

**#16210** Chrome Plated Single Lever Basin Mixer

Also available in a taller version

see #16211 on page 60



**Elka Minimalistic** Single Lever Basin Mixer. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-3/8"

**Shipping Weight:** 3 lbs.

**#07008** Chrome Plated Single Lever Basin Mixer



**Elka Minimalistic**  
Sleek, Modern Design

**Integrated mixer**  
valve with on/off



**NEW Sable Family.** Single Lever Basin Mixer with Fixed Spout in new mat black finish. The shape, both round and square, provide character for the most sophisticated interiors.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** All brass with a matte black finish


**Mounting Hole:** 1-3/8"

**Shipping Weight:** 5 lbs.

**#45100** Brass with a Matte Black Finish

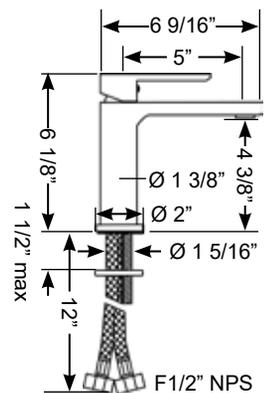

## Basin Faucets

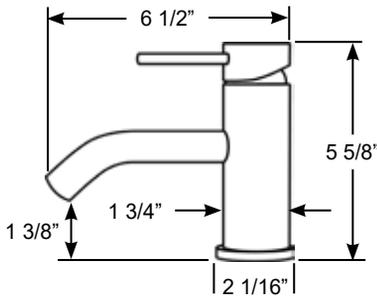

**Nordic Stainless Steel** Galley or Basin Mixer made of durable, low maintenance **Passivated 304 Stainless Steel**. This light weight faucet is perfect for installation on flybridge or aft cockpit locations. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Passivated 304 Stainless Steel


**Finish:** Brushed

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 5 lbs.



**#74103** Brushed 304 Stainless Steel Mixer



**Nordic Family** Single Lever Basin Mixer. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings


**Material:** Chrome plated brass

**Mounting Hole:** 1-3/8"

**Shipping Weight:** 6 lbs.



**#70103** Chrome Plated Single Lever Basin Mixer



**Single Lever** Basin Mixer. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1-1/2"

**Shipping Weight:** 6 lbs.



**#10485** Chrome Plated Single Lever Basin Mixer

## Basin Faucets



**Minimalistic Compact Single Lever Basin Mixer.** Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings


**Material:** Chrome plated brass

**Mounting Hole:** 1"

**Shipping Weight:** 3 lbs.

**#14420** Chrome Finish

**#16198** Brushed Finish



**Yo Family Contemporary Single Lever Basin Mixer.** Ceramic valve.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass


**Mounting Hole:** 1-1/4"

**Shipping Weight:** 4 lbs.

**#70600** Chrome Plated Brass

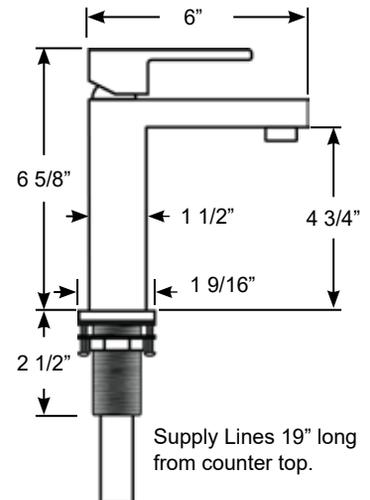

# Basin Faucets

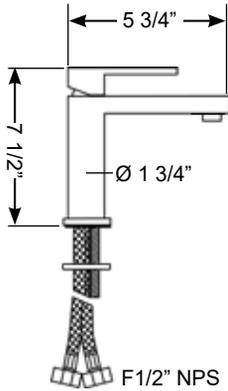

**Farley Single Lever Basin Mixer.** Ceramic valve. Included pop-up drain fits 1-7/8" drain hole, has 1-1/4" threaded outlet.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings


**Material:** Chrome plated brass

**Mounting Hole:** 1-1/4"

**#16295** Chrome Plated Brass



1 1/4" Threaded Outlet

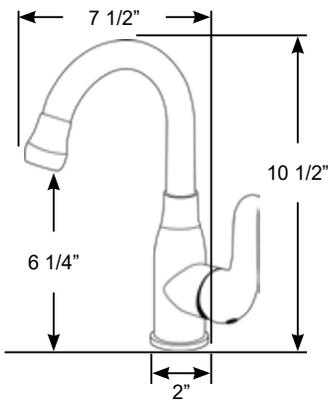

Made of durable, low maintenance Passivated 304 Stainless Steel. This light weight, compact faucet is perfect for installation for galley or bar. Features swivel spout.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Passivated 304 Stainless Steel, Brushed Finish

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 6 lbs.

**#74110** J Spout Galley Mixer

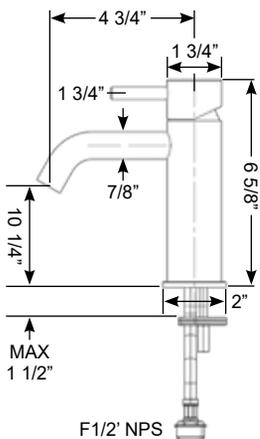

**NEW** Manufactured from marine grade **316 Stainless Steel** for a lifetime of durability and maximum resistance to rust, pitting, and chemical corrosion.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** **316 Stainless Steel**

**Mounting Hole:**

**Shipping Weight:**

**#16605** Brushed

**#16705** Polished



## Basin Faucets



**Elka Otto** Compact Basin and Bidet Mixer with Swivel Aerator. Ceramic valves.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings


**Material:** Chrome plated brass

**Mounting Hole:** 1-3/4"

**Shipping Weight:** 6 Lbs.

**#16310** Chrome

**#16326** Brushed



Heavy-duty Basin Mixer with cast brass spout. Ceramic valves.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings


**Material:** Chrome plated brass, triangle knob is chrome plastic

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 5 lbs.

**#10410** Standard knob

**#14371** Triangle knob

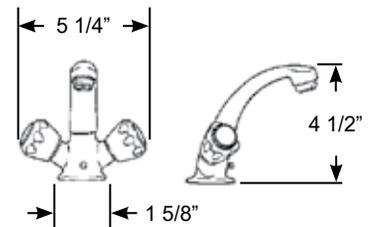

**Classic** Basin Mixer. Ceramic valves.


**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass


**Mounting Hole:** 1-3/8"

**Shipping Weight:** 5 lbs.

**#70001** Chrome Plated Brass

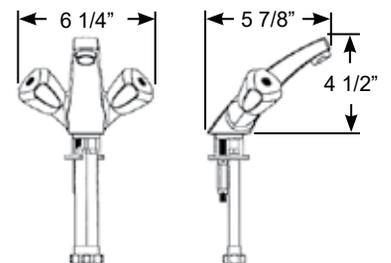

## Cold Water Galley or Bar Taps

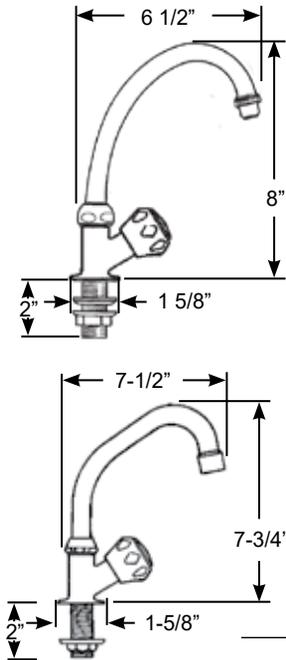

Standard **COLD WATER** tap with Swivel Spout.  
Ceramic valve.

**Water Connection:** 1/2" NPS-M

**Material:** Chrome plated brass body and spout with chrome plated ABS plastic knobs


**Mounting Hole:** 7/8"

**Shipping Weight:** 4 lbs.

**#10172** J Spout Standard knob

**#10618** J Spout Triangle knob

**#10169** Double Bend Spout Standard Knob



Folding **COLD WATER** Tap. Ideal for installing in a sink, under a seat or in a bait station. Vertical or horizontal installation.

**Water Connection:** 3/8" BSP-M threaded shaft, 1/2" NPS-M adapter included


**Material:** Chrome plated brass with clear acrylic or chrome plated ABS plastic triangle knob

**Mounting Hole:** 5/8"

**Shipping Weight:** 4 lbs.

**#10056** Clear acrylic knob

**#10089** Triangle knob



Heavy-duty cast brass **COLD WATER** basin tap.  
Ceramic valve.

**Water Connection:** 1/2" NPS-M


**Material:** Chrome plated brass body with chrome plated ABS plastic knobs

**Mounting Hole:** 7/8"

**Shipping Weight:** 3 lbs.

**#10050** Standard knob

**#10760** Triangle knob



Classic **COLD WATER** Basin Tap. Ceramic valve.

**Water Connection:** 1/2" NPS-M

**Material:** Chrome plated brass

**Mounting Hole:** 7/8"

**Shipping Weight:** 3 lbs.

**#70000** Chrome Plated Brass




## Cold Water Galley or Bar Taps



**Nordic Stainless Steel** Brushed Single Lever Basin **COLD WATER** Tap, light weight, low maintenance **Passivated 304 Stainless Steel**. Ceramic valve.

**Water Connection:** 1/2" NPS-M  
**Material:** Passivated 304 Stainless Steel  
**Finish:** Brushed  
**Mounting Hole:** 7/8"  
**Shipping Weight:** 3 lbs.


**#74106** Brushed 304 Stainless Steel



**Nordic Stainless Steel** brushed single lever basin **COLD WATER** tap, light weight, low maintenance **Passivated 304 Stainless Steel**. Ceramic valve.

**Water Connection:** 1/2" NPS-M, threaded stud 1-5/8" long.  
**Material:** Passivated 304 Stainless Steel  
**Finish:** Brushed  
**Mounting Hole:** 7/8"  
**Shipping Weight:** 5 lbs.


**#74107** Brushed 304 Stainless Steel

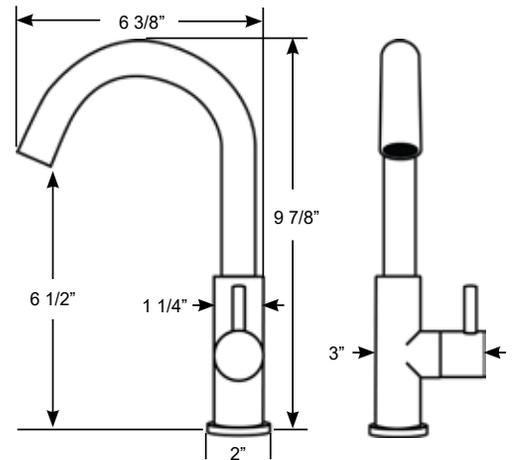

**Nordic Family** Contemporary Single Lever **COLD WATER** Basin or Bar Tap. Ceramic valve.

**Water Connection:** 1/2" NPS-M threaded shaft  
**Material:** Chrome plated brass  
**Mounting Hole:** 5/8"  
**Shipping Weight:** 4 lbs.


**#70106** Chrome Plated Brass




**Elka Compact** **COLD WATER** Basin Tap. Ceramic valve. Spout does rotate.

**Water Connection:** Flexible supply line with 1/2" NPS-F fittings  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-3/8"  
**Shipping Weight:** 5 lbs.

**#16190** Chrome Plated Brass  
 Also available in a mixer version see #16191 on page 64

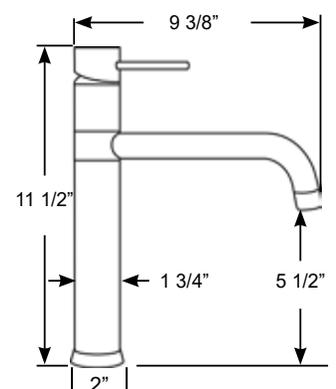

# Folding Faucets

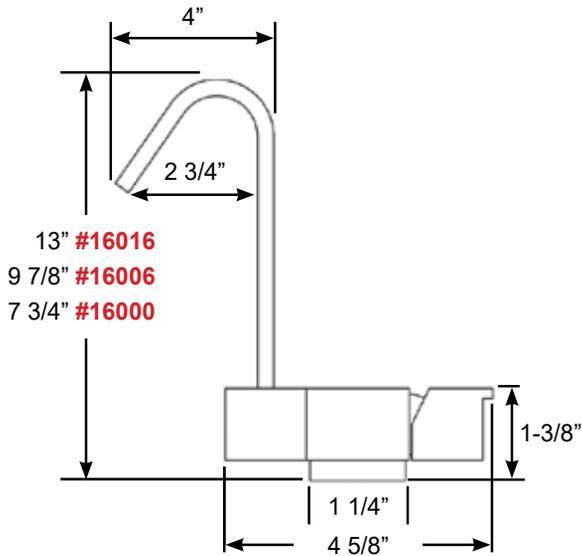

**Elka contemporary** Folding Mixer with Swivel Spout. Ceramic valve. Features inward opening valve handle to prevent accidental opening in rough conditions while underway.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Mounting Hole:** 1" x 1/2"

**Shipping Weight:** 4 lbs.

- #16000 with 7-3/4" Spout (shown), #16020 Brushed Finish
- #16006 with 9-7/8" Spout, #16026 Brushed Finish
- #16016 with 13" Spout
- #16040 COLD WATER tap with 7-3/4" Spout



# Folding Faucets




## Mini Compact Folding Mixer with Double Bend Spout. Ceramic valve.

Features inward opening valve handle to prevent accidental opening in rough conditions while underway.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Shipping Weight:** 3 lbs.

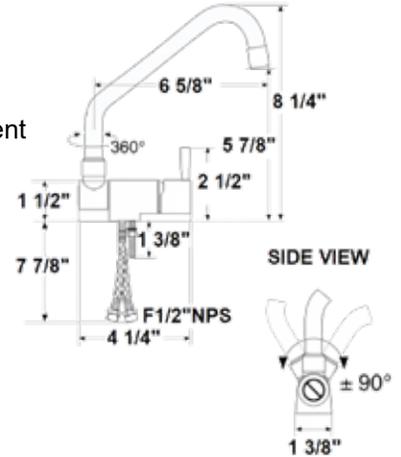

**#14400** Double Bend Spout




## Single Lever High Reach Spout Folding Mixers. Ceramic valve.

Features inward opening valve handle to prevent accidental opening in rough conditions while underway.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Shipping Weight:** 3 lbs.

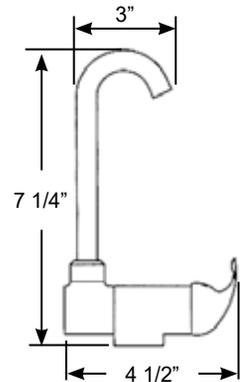

**#10810** High Reach Spout




## Single Lever Low Spout Folding Mixers. Ceramic valve.

Features inward opening valve handle to prevent accidental opening in rough conditions while underway.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Shipping Weight:** 3 lbs.



**#10811** Low Spout




## Single Lever Double Bend Spout Folding Mixers. Ceramic valve.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Chrome plated brass

**Shipping Weight:** 3 lbs.

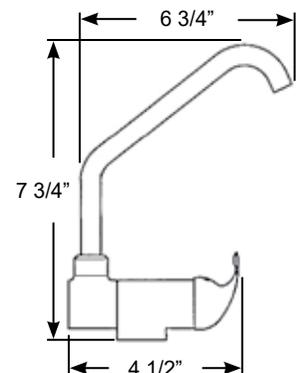


**#10812** Double Bend Spout

# Folding Faucets

## Folding Mixer with Low Swivel Spout.

Ceramic valve.

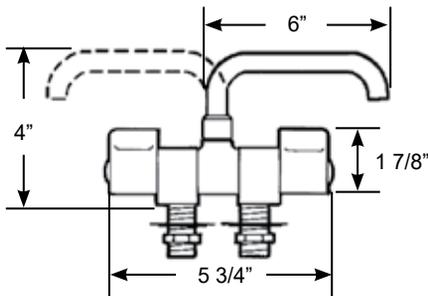


**Water Connection:** 3/8" BSP-M threaded shafts, 1/2" NPS-M adapters included  
**Material:** Chrome plated or white powder coated brass  
**Mounting Hole:** 2 each 5/8", 2-3/16" center to center.  
**Shipping Weight:** 3 lbs.

- #10476 Chrome (shown)
- #10477 White powder coat



## Folding Mixer with High Reach Spout.

Ceramic valve.

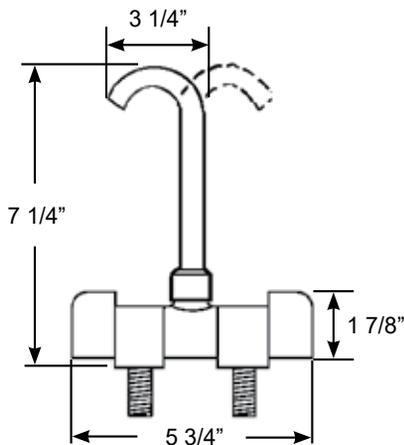


**Water Connection:** 3/8" BSP-M threaded shafts, 1/2" NPS-M adapters included  
**Material:** Solid brass with finish  
**Mounting Hole:** 2 each 5/8", 2-3/16" center to center  
**Shipping Weight:** 3 lbs.

- #10474 Chrome
- #10475 White powder coat
- #10665 Brushed PVD (shown)




## Folding Mixer with Double Bend Spout.

Ceramic valve.

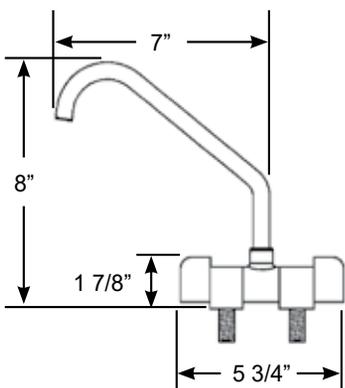

**Water Connection:** 3/8" BSP-M threaded shafts, 1/2" NPS-M adapters included  
**Material:** Solid brass with finish  
**Mounting Hole:** 2 each 5/8", 2-3/16" center to center  
**Shipping Weight:** 3 lbs.

- #10622 Chrome
- #10669 Brushed PVD (shown)

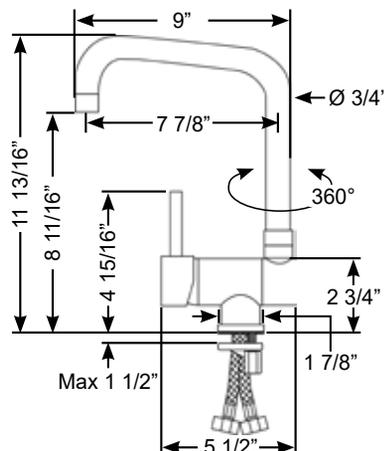

**NEW Nordic Family Folding Galley Mixer.** Folding spout is equipped with an aerator and swivels 360 degrees. Folds for cabinetry access!

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings  
**Material:** Chrome plated brass  
**Mounting Hole:** 1-1/2"  
**Shipping Weight:** 5 lbs

- #14428 Chrome



## Folding Faucets



**NEW Nordic Stainless Steel** Brushed Single Lever Folding Mixer with Double Bend Spout. Ceramic valve.

Features inward opening valve handle to prevent accidental opening in rough conditions while underway. Knob is off center to allow folding completely flat.



**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Passivated 304 Stainless Steel

**Mounting Hole:** 1-1/4"

**Shipping Weight:** 5 lbs.

**#74127** 304 Stainless Steel

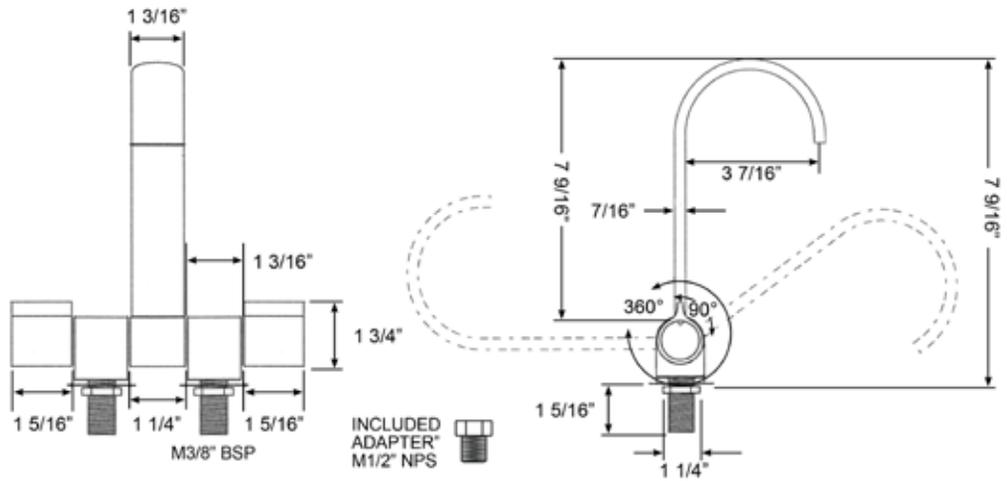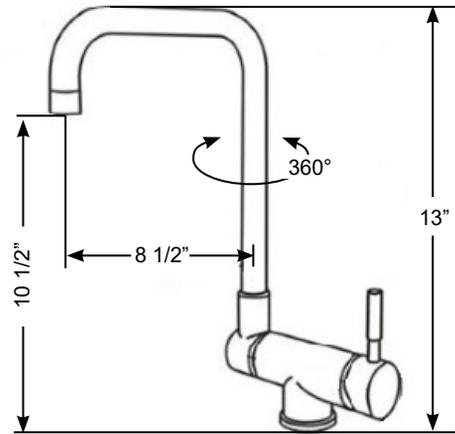

**NEW Folding Square Ceramic Mixer** Built on the platform from the Folding Ceramic Family, we have added the square spout from the Geometric Family. A ceramic valve cartridge, for drip free service, is mated with a chrome ABS knob for precision performance.

The combined soft but definite shape, make the Piato suitable for most modern interiors of today's boats.

**Water Connection:** 3/8" BSP-M threaded shaft, 1/2" NPS-M adapter included


**Material:** Solid brass with chrome finish body, chrome ABS knob

**Mounting Holes:** 5/8"

**Shipping Weight:** 3 lbs.

**#10581** Chrome

## Folding Faucets

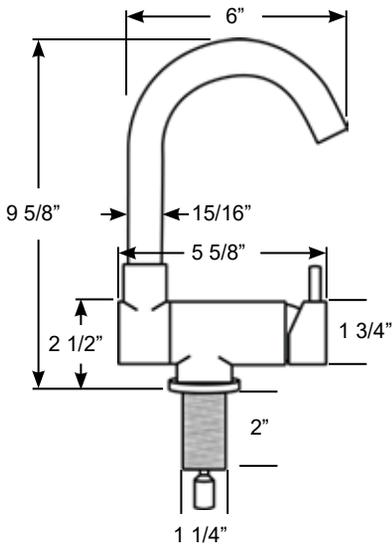

**Nordic Stainless Steel** Brushed Single Lever Folding Mixer. Ceramic valve.

Features inward opening valve handle to prevent accidental opening in rough conditions while underway. Knob is off center to allow folding completely flat.

**Water Connection:** Flexible supply lines with 1/2" NPS-F fittings

**Material:** Passivated 304 Stainless Steel


**Mounting Hole:** 1-1/4"

**Shipping Weight:** 5 lbs.

**#74126** 304 Stainless Steel



## Folding Cold Water Taps

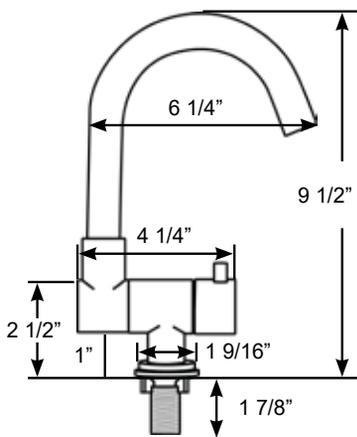

**J-Spout Stainless Steel Folding**, Swivel Spout, **COLD WATER** tap. Ceramic valve.

Made of durable, low maintenance Passivated 304 Stainless Steel. This light weight cold water tap is perfect for installation on fly bridge, bar or aft cockpit locations.

**Water Connection:** 1/2" NPS-M

**Material:** Passivated 304 Stainless Steel, Brushed Finish

**Mounting Hole:** 7/8"


**Shipping Weight:** 5 lbs.

**#74125** Brushed 304 Stainless Steel



# Folding Cold Water Taps

Plumbing

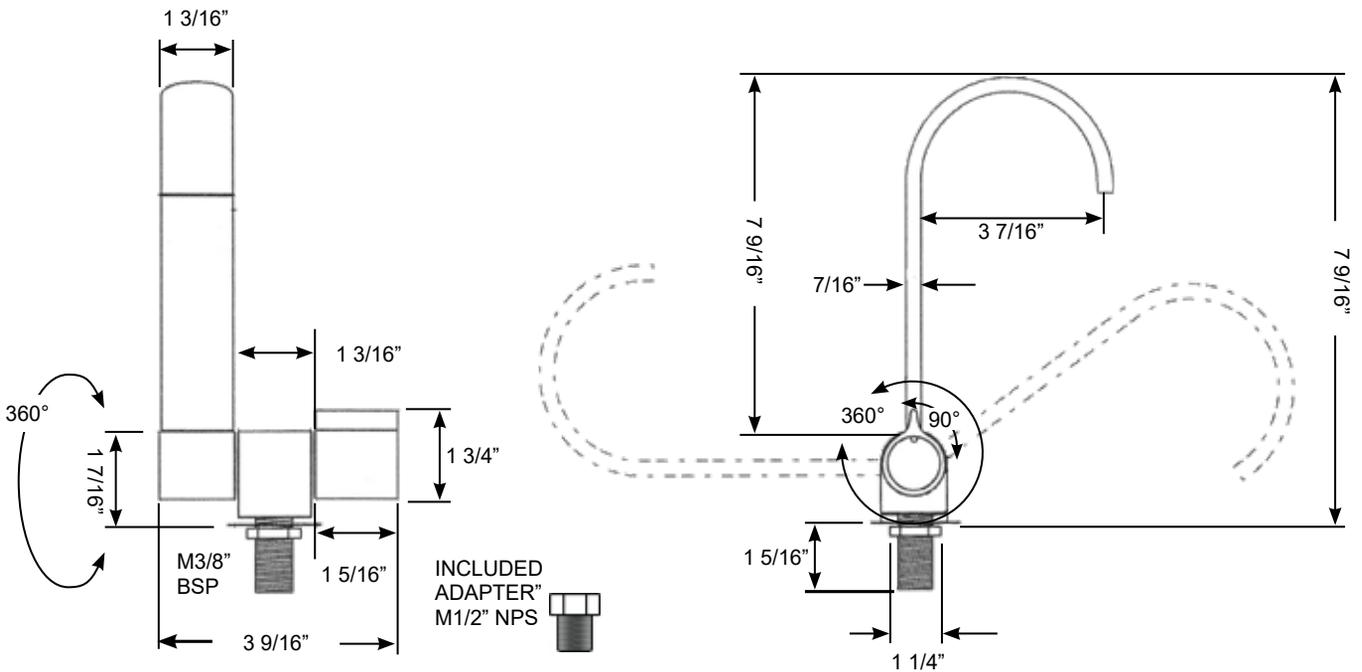

**NEW** The combined success of our **Folding Ceramic Family** and our **Square Geometric Family**, we introduce a combination of the two families, the **PIATO!** Built on the platform from the Folding Ceramic Family, we have added the square spout from the Geometric Family and created the Piato. A ceramic valve cartridge, for drip free service, is mated with a chrome ABS knob for precision performance.

The combined soft but definite shape, make the Piato suitable for most modern interiors of today's boats.

**Water Connection:** 3/8" BSP-M threaded shaft, 1/2" NPS-M adapter included


**Material:** Solid brass with chrome finish body, chrome ABS knob

**Mounting Hole:** 5/8"

**Shipping Weight:** 3 lbs.

**#10580** Chrome


## Folding Cold Water Taps

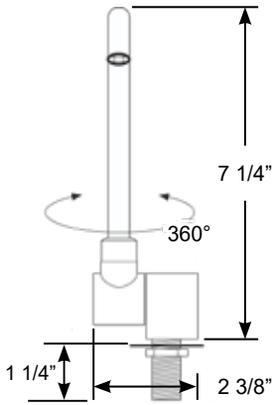

Fold-down Spout for foot pump. This faucet has no on/off valve.

**Water Connection:** 3/8" BSP-M threaded shaft, 1/2" NPS-M adapter included  
**Material:** Chrome plated brass  
**Mounting Hole:** 5/8"  
**Shipping Weight:** 2 lbs.


#14090 Chrome



Folding **COLD WATER** Tap with low swivel and folding spout. 1/4 turn ceramic valve.

**Water Connection:** 3/8" BSP-M threaded shaft  
 1/2" NPS-M adapters included  
**Material:** Chrome plated, white powder coated brass or brushed PVD  
**Mounting Hole:** 5/8"  
**Shipping Weight:** 3 lbs.


#10183 Chrome  
 #10184 White powder coat  
 #10664 Brushed PVD

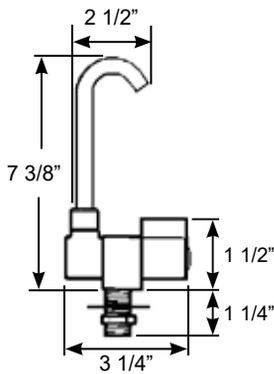

Folding **COLD WATER** Tap with High Reach Swivel and Folding Spout. Ceramic valve.

**Water Connection:** 3/8" BSP-M threaded shaft, 1/2" NPS-M adapters included  
**Material:** Solid brass with finish  
**Mounting Hole:** 5/8"  
**Shipping Weight:** 3 lbs.

#10180 Chrome (shown)  
 #10182 White powder coat  
 #10663 Brushed PVD



Folding **COLD WATER** Tap with Double Bend Swivel and Folding Spout. Ceramic valve.

**Water Connection:** 3/8" BSP-M threaded shaft, 1/2" NPS-M adapters included  
**Material:** Chrome plated or white powder coated brass  
**Mounting Hole:** 5/8"  
**Shipping Weight:** 3 lbs.

#10620 Chrome (shown)  
 #10621 White powder coat



## Head Accessories



70403

**Bulkhead mount dish**  
Insert prevents vibrations.

**Material:** Chrome plated brass with glass dish  
**Shipping Weight:** 2 lbs.

**#70403** CLIPPER Collection  
**#70359** GEOMETRIC Collection



70359



70402



70360

**Toilet Paper Dispenser**  
with hinged cover to shield paper from shower spray.

**Material:** Chrome plated brass  
**Shipping Weight:** 2 lbs.

**#70402** CLIPPER Collection  
**#70360** GEOMETRIC Collection



**Retractable 10' Clothes Line**  
with stainless steel housing.

**Material:** Stainless Steel  
**Shipping Weight:** 1 lb.

**#70353** 304 Stainless Steel



70357



70401

**Towel Holders**

**Material:** Chrome plated brass  
**Shipping Weight:** 2 lbs.


**#70357** 7" diameter ring GEOMETRIC Collection  
**#70401** 8" diameter ring CLIPPER Collection

# Head Accessories

## Towel Bars

**Material:** Chrome plated brass  
**Shipping Weight:** 3 lbs.

- #70407 CLIPPER Collection - 13/16" round, 24" Long
- #70361 GEOMETRIC Collection - 1/2" round, 18" Long

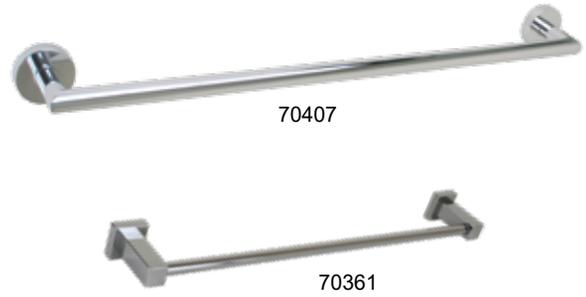

## Robe Hooks

**Material:** Chrome plated brass  
**Shipping Weight:** 1 lb.


- #70405 Double CLIPPER Collection
- #70358 Single GEOMETRIC Collection



## Farley Bulkhead Mount Toilet Paper Holder

**Material:** Chrome plated brass


- #16301 Chrome Plated Brass Holder



## Farley Family Bulkhead Mount Robe Hook

**Material:** Chrome plated brass


- #16302 Chrome Plated Brass Robe Hook

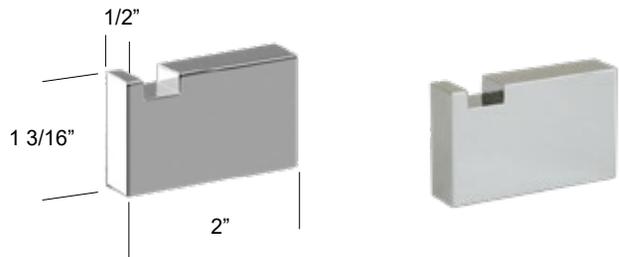


## Farley Family Bulkhead Mount Towel Bar

**Material:** Chrome plated brass

- #16303 Chrome Plated Brass Towel Bar

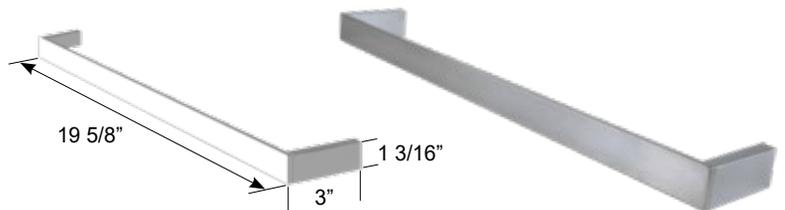

## Parts and Accessories



**#19089 Adjustable swivel spray aerator.** Slide aerator up or down to switch from faucet flow to shower spray.

**Material:** Plastic and chrome plated brass  
**Thread Type:** 22x1 female  
**Shipping Weight:** 1 lb.



**#14048** Convert your aerator to a swivel aerator with this **swivel adapter**. Fits between existing sprayer and aerator.

**Material:** Chrome plated brass  
**Thread Type:** 22x1 female to 22x1 male  
**Shipping Weight:** 1 lb.




**#10259 Counter Top Holder for ELBOW shower handles**

**Material:** Stainless Steel and Plastic  
**Mounting Hole:** 1-1/16"  
**Shipping Weight:** 1 lb.



**#10260 Counter Top Holder for STRAIGHT shower handles**

**Material:** Stainless Steel and Plastic  
**Mounting Hole:** 1-1/16"  
**Shipping Weight:** 1 lb.

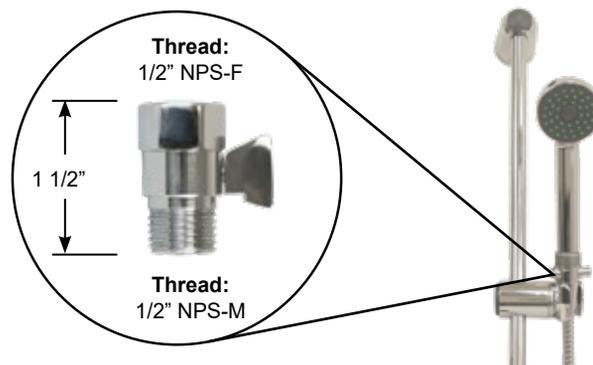

**#10895 Water on/off valve.** Included with our shower kits on page 30. Fits between our **Straight** shower handles and hose.

**Material:** Chrome plated brass  
**Thread Type:** 1/2" NPS  
**Shipping Weight:** 1 lb.



**#10251 Large Washer 1/2" 2.0mm THIN.** (outside diameter is 3/4") Use between 1/2" flexible supply line and water supply.



**#10269 Medium Washer 3/8"** (outside diameter is 5/8"). Use between hose and 3/8" mixer connection.



**#10254 Large Washer 1/2" 2.8mm THICK.** (outside diameter is 3/4") Use between straight sprayer handles and hose.



**#10268 Small Washer 3/8"** (outside diameter is 9/16"). Use between elbow sprayer handles and hose.

## Parts and Accessories

Our **new recessed cap and cup design** made with Dupont™ Zytel® Nylon Resin for greater strength and more UV exposure resistance. A new rubber gasket under the cap will keep water out when cap is closed. Available with single white composite or stainless steel cap. **This new design will fit in the same 2-3/4" mounting hole and screw pattern as existing design.**

Existing cup design is available for replacements and for use with double Stainless Steel or plastic caps.

**Mounting Hole: 2-3/4"**



**#12104** Single white cap and cup



**#12152** Single white cup



**#12154** Single black cup

**#12151** Single white cap

**#12153** Single Stainless Steel cap for use with white cup or black cup



**#121537** Single Stainless Steel cap for use with black cup



**#12143** Double Stainless Steel Cap

**#12103** Single White Cup



**#12102** Double White Cap

**#12105** Double White Cap and Cups



#10253

#10264

Shower Symbol on Cap

**Mounting Hole: 2-1/4"**

Replacement cup and cap for **HORIZONTALLY MOUNTED** recessed showers on page 9. The caps have a **SHOWER SYMBOL** on top.

**#10252** White cap

**#10253** White cup for pull-out shower handle

**#10335** White cup for **#10498** mixing valve and **#10835** cold water valve on page 15

**#10014** White cap (#10252) and cup (#10253)

**#10263** Black cap

**#10264** Black cup

**#10262** Black cap and cup



Scandvik Logo on Cap

Replacement cup and cap for **VERTICALLY MOUNTED** recessed showers on page 14. The cap has a **SCANDVIK LOGO** on top.

**#10030** White cap

**#10031** White cup

**#10029** White cap and cup

**Mounting Hole: 2-1/4"**

Acrylic capped ABS utility boxes. Outside dimensions are given.

**#14017** White, 6-7/8" W x 12" H x 4" D vertical with door.

**#10494** Off-White color #12, 5-7/8" W x 11-3/8" H x 4" D vertical without door.



#14017



#10494

STRAIGHT Sprayer Handles



*Straight Standard GRP trigger sprayer handles.*  
**Thread Type:** 1/2" NPS-M  
**#10279** White  
**#10295** Black



*Straight Euro ABS plastic trigger sprayer handles.*  
**Thread Type:** 1/2" NPS-M  
**#14003** Black  
**#14004** White  
**#14005** Chrome



*Straight Push-Button brass and ABS sprayer handles.*  
**Thread Type:** 1/2" NPS-M  
**#10283** White  
**#10297** Black  
**#17113** Replacement White Plastic Handle for 10283



*Chrome brass sprayer handles.*  
**Thread Type:** 1/2" NPS-M  
**#15946** Chrome



*Executive ABS plastic shower handles.*  
**Thread Type:** 1/2" NPS-M  
**#14341** Chrome



*Aqua Fina ABS plastic shower handles.*  
**Thread Type:** 1/2" NPS-M  
**#14340** Chrome



ABS plastic shower handle for 07023.  
**Thread Type:** 1/2" NPS-M  
**#15933** Chrome



Pacified 304 Stainless Steel  
**Thread Type:** 1/2" NPS-M  
**#74161** Brushed



304 Stainless Steel  
**Thread Type:** 1/2" NPS-M  
**#74160** Brushed



Pull-out ABS plastic handle for Galley Mixers 10871, 10880, 70201 and 70251.  
**Thread Type:** 1/2" NPS-M  
**#14023** Chrome



ABS plastic shower handle for 10881.  
**Thread Type:** 1/2" NPS-M  
**#14024** Chrome



ABS plastic shower handle for 14423, 14427.  
**Thread Type:** 1/2" NPS-M  
**#14343** Chrome



ABS plastic shower. Anti-Scaling feature.  
**Thread Type:** 1/2" NPS-M  
**#15950** Scotch Bright



ABS plastic shower handle for 70101 and 70102.  
**Thread Type:** 1/2" NPS-M  
**#71003** Chrome



ABS plastic shower handle for 70603, 15927, 16298.  
**Thread Type:** 1/2" NPS-M  
**#71040** Chrome

ELBOW Sprayer Handles



*Elbow Standard GRP trigger sprayer handles.*  
**Thread Type:** 15/1 metric female  
**#10278** White  
**#10294** Black



*Elbow Euro ABS trigger sprayer handles.*  
**Thread Type:** 15/1 metric female  
**#14000** White  
**#14001** Black  
**#14002** Chrome



*Elbow combo spray handles with 2-way adjustable spray pattern from faucet flow or shower spray.*  
**Thread Type:** 15/1 metric female.  
**#10293** Black  
**#10277** White



*Elbow combo spray handles with on/off valve and 2-way adjustable spray pattern from faucet flow or shower spray.*  
**Thread Type:** 15/1 metric female  
**#10296** Black  
**#10777** White



*Elbow ABS combo sprayer handle for 14410 mixer.*  
**Thread Type:** 15/1 metric female  
**#14006** Chrome



*Elbow ABS combo sprayer handle for 16216 mixer.*  
**Thread Type:** 15/1 metric female  
**#15951** Chrome

Hoses for STRAIGHT Sprayer Handles

5' Hose

- #14229 5' Chrome Flex
- #14360 5' Chrome Spiral

6' Hose

- #10288 6' Chrome Flex
- #10290 6' White
- #10292 6' Black
- #14361 6' Chrome Spiral

10' Hose

- #10321 10' White
- #10323 10' Black
- #14362 10' Chrome Spiral

13' Hose

- #10325 13' White
- #10327 13' Black
- #14363 13' Chrome Spiral

20' Hose

- #14217 20' White
- #10328 20' Black



3/8" BSP-F

1/2" NPS-F



Chrome-Flex  
(Chrome plated  
brass spiral)



Chrome-Spiral  
(Chrome spiral with clear  
nylon outer layer)



White Nylon



Black Nylon

4' Hose

- #15958 4' Chrome Spiral hose for All-In-One Shower  
Fits Showers 16114, 16115, 16116

5' Hose

- #14365 5' Chrome Spiral
- #71056 5' Stainless Steel

6' Hose

- #71001 6' Stainless Steel
- #10430 6' White
- #14364 6' Chrome Spiral
- #74169 6' Brushed Stainless Steel

10' Hose

- #10431 10' White Nylon
- #15890 10' Gray Braided Nylon

1/2" NPS-F

1/2" NPS-F



Chrome Spiral



Stainless Steel



White Nylon



Gray Braided Nylon

5' Hose

- #71029 5' Stainless Steel

3/8" BSP-M

1/2" NPS-F



Stainless Steel

Hoses for ELBOW Sprayer Handles

5' Hose

- #10271 5' Chrome Flex
- #10273 5' White
- #10274 5' Black
- #14350 5' Chrome Spiral
- #15995 5' Grey for 16216 & 16217

6' Hose

- #10286 6' Chrome Flex
- #10289 6' White
- #10291 6' Black
- #14351 6' Chrome Spiral

10' Hose

- #10320 10' White
- #10322 10' Black
- #14352 10' Chrome Spiral

13' Hose

- #10324 13' White
- #10326 13' Black
- #14353 13' Chrome Spiral

20' Hose

- #10334 20' Black
- #10339 20' White



3/8" BSP-F

15/1 METRIC-M



Chrome-Flex  
(Chrome plated  
brass spiral)



Chrome-Spiral  
(Chrome spiral with  
clear nylon outer layer)



White Nylon



Black Nylon



Gray Braided Nylon

5' Hose

- #14301 5' Chrome Flex (*Fits Pull-Out  
Faucets 10880, 10881, 10871*)
- #74024 5' Gray Braided Nylon

6' Hose

- #14302 6' Chrome Flex
- #14268 6' White
- #14269 6' Black

1/2" NPS-F

15/1 Metric-M



Chrome-Flex  
(Chrome plated  
brass spiral)



White Nylon



Black Nylon



Gray Braided Nylon

# Parts and Accessories

## Faucet Supply Lines



**PART #**

**LENGTH**

**8mm x 1/2" F**

**FAUCET END:** Male 8mm

**SUPPLY END:** Female 1/2"

- #17100 HOSE SUPPLY 8mm x 1/2" F w/ CAPTIVE WASHER 8"
- #15954 HOSE SUPPLY 8mm x 1/2" F w/ CAPTIVE WASHER 30cm 12"
- #15983 HOSE SUPPLY 8mm x 1/2" F w/ CAPTIVE WASHER 50cm 20"



**8mm x 3/8" F**

**FAUCET END:** Male 8mm

**SUPPLY END:** Female 3/8"

- #15903 HOSE SUPPLY 8mm x 3/8" F for Elka 10623 Mixer 12"
- #17102 HOSE SUPPLY 8mm x 3/8" F w/ CAPTIVE WASHER 35cm 12"



**8mm x 3/8" M**


**FAUCET END:** Male 8mm

**OUTPUT END:** Male 3/8"

- #10332 HOSE SUPPLY 8mm x 3/8" M 8"



- #10018 HOSE SUPPLY 8mm x 3/8" M w/ 44mm Extension 8"
- #10019 HOSE SUPPLY 8mm x 1/2" F w/ CAP WASHER & 44mm Extension 12"

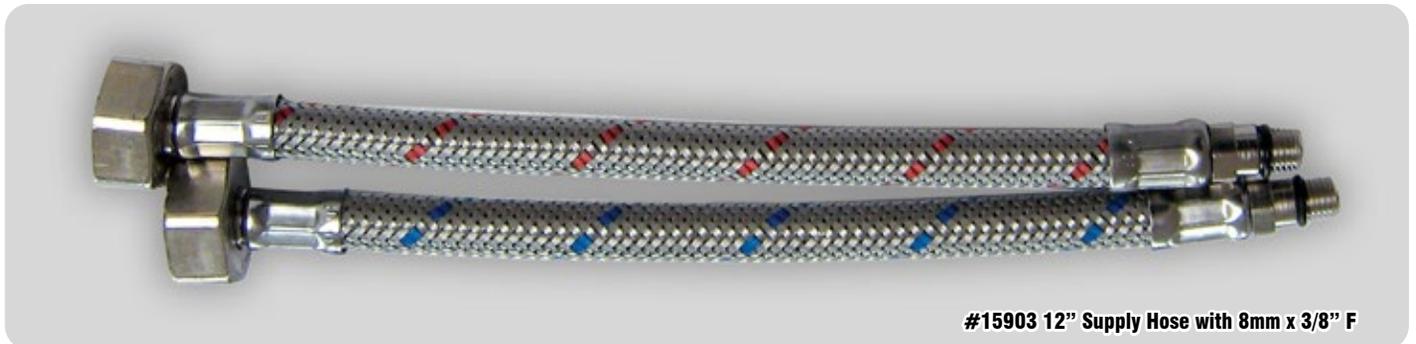

#15903 12" Supply Hose with 8mm x 3/8" F

# Parts and Accessories

## Faucet Supply Lines

**PART #**

**LENGTH**

**10mm x 1/2" F**

**FAUCET END:** Male 10mm

**SUPPLY END:** Female 1/2"

- #17101 HOSE SUPPLY 10mm x 1/2" F w/ CAPTIVE WASHER 8"
- #15982 HOSE SUPPLY 10mm x 1/2" F w/ CAPTIVE WASHER 30cm 12"
- #15984 HOSE SUPPLY 10mm x 1/2" F w/ CAPTIVE WASHER 50cm 20"
- #15914 HOSE SUPPLY 10mm x 1/2" F for Elka Rainshower Heads 50"



**10mm x 3/8" F**

**FAUCET END:** Male 10mm

**SUPPLY END:** Female 3/8"

- #17103 HOSE SUPPLY 10mm x 3/8" F w/ CAPTIVE WASHER 35cm 12"



**10mm x 3/8" M**

**FAUCET END:** Male 10mm

**OUTPUT END:** Male 3/8"

- #10017 HOSE SUPPLY 10mm x 3/8" M 8"



**CLASSIC & NORDIC FAUCETS**

**FAUCET END:** Male 9.5mm

**SUPPLY END:** Female 1/2"

- #71024 HOSE SUPPLY ELITE FAUCETS 1/2" F 24"



**NORDIC S/S FAUCETS**

**FAUCET END:** Male 10mm

**SUPPLY END:** Female 1/2"

- #74010 HOSE SUPPLY S/S 10mm x 1/2" F 23"



#10017 12" Supply Hose with 10mm x 3/8" M

Adapters



Adapters convert 3/8" BSP-M to 1/2" NPS-M fitting. Washers included.

**Material:** Brass or Delrin  
**Thread Type:** 3/8" BSP-F x 1/2" NPS-M



#10002 Brass  
#10015 Delrin

Delrin adapter to convert 3/8" BSP-F to 1/2" NPS-M fitting.



**Material:** Delrin  
**Thread Type:** 3/8" BSP-M x 1/2" NPS-M

#10961 Delrin



Brass Elbow Adapter

**Material:** Brass  
**Thread Type:** 3/8" BSP-F x 3/8" BSP-M  
#10962 Brass



1/2" M to 1/2" M Adapter

**Material:** Brass, Plastic  
**Thread Type:** 1/2" BSP-M x 1/2" BSP-M



#10348 Delrin  
#10349 Brass

Hose Barb Fittings

Adapters to convert threaded fittings to hose barb fittings.

**Material:** Brass with Plastic wing nut.

Adapters to convert threaded fittings to hose barb fittings.

**Material:** Polypropylene



#10955 1/2" NPS-F to 3/8" hose barb



#10026 1/2" NPS-F to 1/2" hose barb



#10027 1/2" NPS-F to 90° 1/2" hose barb



#10951 3/8" BSP-M to 1/2" hose barb



#10957 3/8" BSP-M to 5/8" hose barb



#10948 1/2" NPS-M to 1/2" hose barb



#14306 1/2" NPS-M to 3/4" hose barb

15 MM Speedfit

If you are going directly to 15 mm PEX tubing, this piece will make your life easier when installing a pull-out shower or recessed shower. The 3/8" hose fitting fits this adapter and the other end is a 15 mm male slip joint.



**#10956** 1/2" NPS-M to 15 mm female speedfit slip joint

**Material:** Plastic



**#10959** 3/8" BSP-M to 15 mm male speedfit slip joint

**Material:** Plastic



**#10960** 1/2" NPS-F to 15 mm female speedfit slip joint with 90° elbow

Note: Does not fit 10015 adapter

**Material:** Plastic

1/2" Speedfit



**#18003** 1/2" x 3/8" NPS-M Connector

**Material:** Plastic



**#18000** 1/2" x 1/2" BSP-F Connector

**Material:** Plastic



**#18005** 1/2" x 1/2" BSP-M Connector

**Material:** Plastic



**#18004** 1/2" x 3/8" BSP-M Adapter

**Material:** Plastic



**#18011** 1/2" x 3/8" BSP-M Swivel Elbow Adapter

**Material:** Plastic



**#18010** 1/2" x 1/2" BSP-M Swivel Elbow Adapter

**Material:** Plastic



**#18015** 1/2" Union T Adapter

**Material:** Plastic

## Stainless Steel is the best choice for marine sinks

It makes sense to have good quality marine grade sinks to withstand the harsh marine environment.

- Stainless steel is resistant to extreme temperatures and can be used with everything from hot pots and pans to ice cubes.
- Stainless steel is more forgiving to glass and dinnerware if accidentally dropped in the sink, it is more durable and will last a lifetime without losing its inherent qualities.
- Scandvik stainless steel sinks match modern kitchens and galleys using stainless steel designs for appliances.
- Stainless steel sinks installed outside subjected to the sun are not affected by UV rays which can discolor other sink materials.
- Stainless steel is sanitary and will not hold bacteria making it a safe place to prepare foods.
- Scandvik stainless steel sinks are made from an alloy of 18% chromium and 10% nickel referred to as 18/10 stainless steel and is considered the best for corrosion resistance and durability.
- Scandvik stainless steel sinks are 18-20 gauge (1mm) thickness which provides a strong, durable but still lightweight sink.
- Offered in a large variety of shapes, sizes and finishes, a Scandvik stainless steel sink will give your boat the ultimate sink for galley, bar and grill, head, bait prep station or utility areas.



### Types of Sinks

**Basins** - are characterized as a sphere cut in half. Drains are typically centrally located at lowest point of the bowl.



**Rectangular** - sinks are characterized by vertical sides with either a centrally located or off-center drain location.



**Cylindrical** - sinks are characterized by having vertical sides with an off-center drain.



**Double** - sinks are characterized by two bowls side by side with either centrally located or off-center drain locations.





## Flange Profiles

### Stainless Steel Sink Flanges:


There are four flange styles. The flange style for the sink will be shown with the part number.

### Top mount Flanges A , B and D:

Install drop in top mount sinks with a bedding compound of silicone or caulk. Top mount sinks can be installed under counter mounted, however, we recommend you consult with an experienced carpenter.

### Under the counter mount Flange C:


This flange is specifically designed to be mounted under the counter top.



# Ceramic Sinks



**#23010** Ceramic Rectangle Vessel Sink

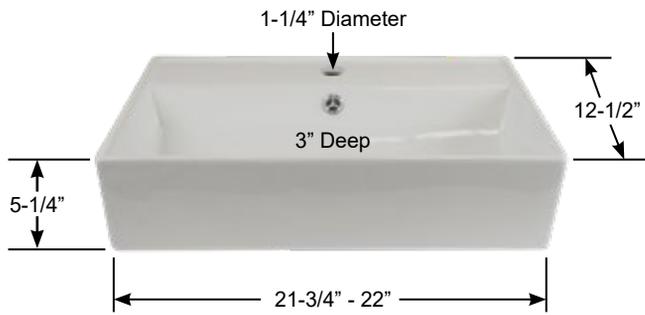


**Product Weight:** 25-1/2 Lbs.

Heavy duty ceramic bowl that will stand up to many years of regular use. Beautiful white glazed finish. Perfectly suited for installation in any area needing a wash basin. Drain opening is 1-11/16". Due to the nature of the product dimensions may vary slightly.


**#19007** Pop-Up Drain with overflow for Rectangle Ceramic Sink  
**Material:** Chrome Plated Brass  
**Outlet Connection:** 1-1/4"  
**Shipping Weight:** 1 lbs.




**#19005** Pop-Up Drain for Round Ceramic Sinks  
**Material:** Chrome Plated Brass  
**Outlet Connection:** 1-1/4"  
**Shipping Weight:** 1 lbs.

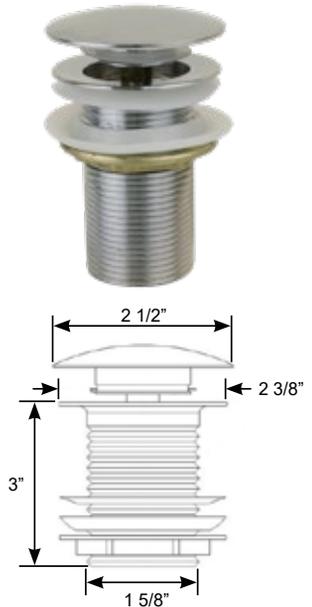

**#23000**


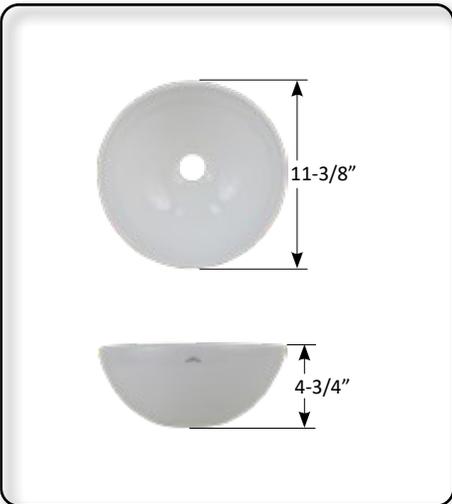


**#23001**

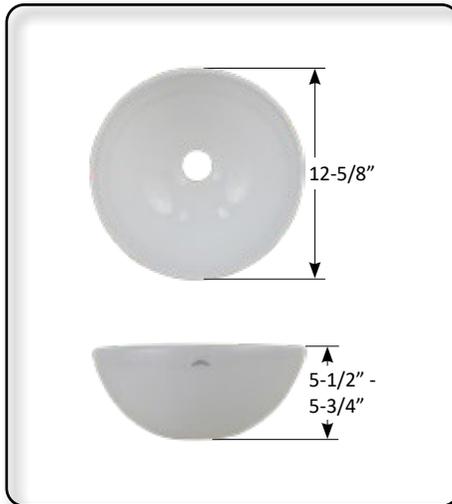


### Flange Profile

Inset flange "A"  
 Inset flange "B"  
 Under surface flange "C"  
 Inset flange "D"

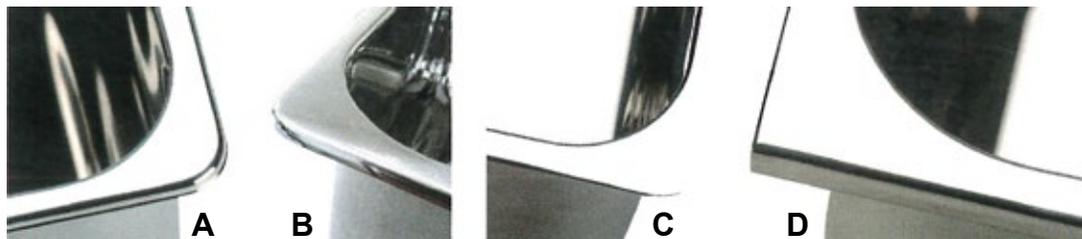


## HEMISPHERICAL AND OVAL STAINLESS STEEL BASINS

DIAMETER 11" 13" 15" - Mirror or Brushed Finish

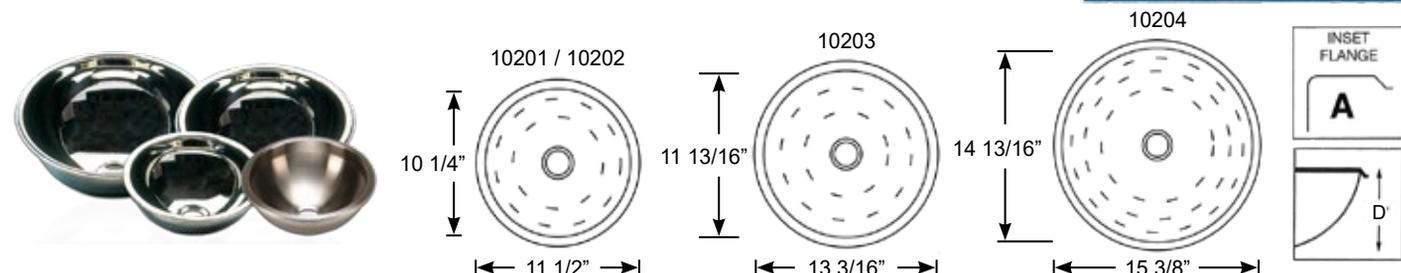


#10201	Mirror Finish	2-1/4" Drain Hole	D 4-3/4"
#10202	Brushed Finish	2-1/4" Drain Hole	D 4-3/4"
#10203	Mirror Finish	2-1/4" Drain Hole	D 6"
#10204	Mirror Finish	2-1/4" Drain Hole	D 6"

### Mirror or Brushed Finish

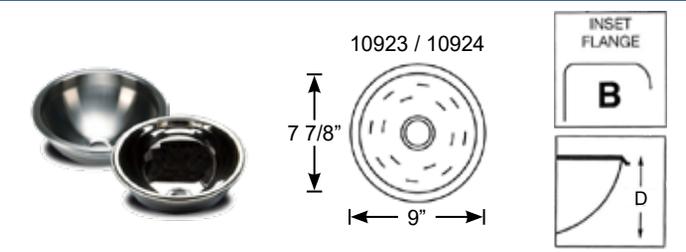


#10923	Mirror Finish	2-1/4" Drain Hole	D 4"
#10924	Brushed Finish	2-1/4" Drain Hole	D 4"

### Polished or Brushed Finish

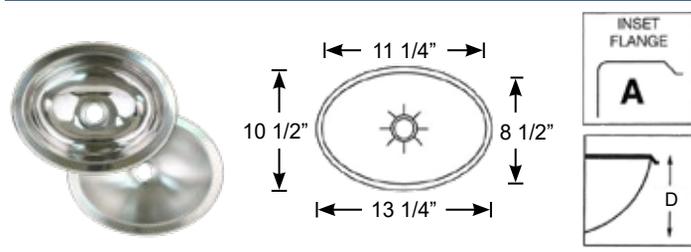


#10280	Polished Finish	1-11/16" Drain Hole	D 5"
#10281	Brushed Finish	1-11/16" Drain Hole	D 5"

### Mirror Finish

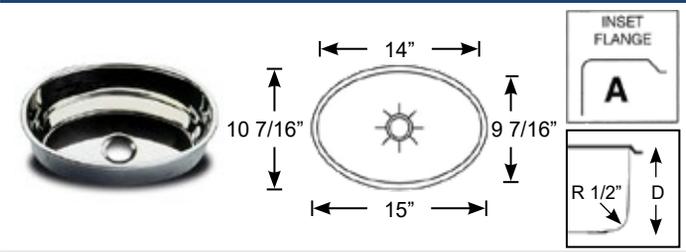


#10211	Mirror Finish	2-1/4" Drain Hole	D 5"
--------	---------------	-------------------	------

### Mirror Finish

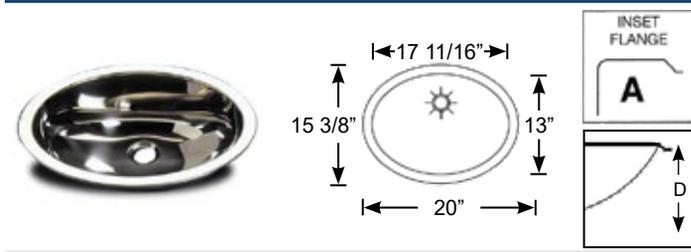


#10757	Mirror Finish	2-1/4" Drain Hole	D 6"
--------	---------------	-------------------	------

### Mirror Finish

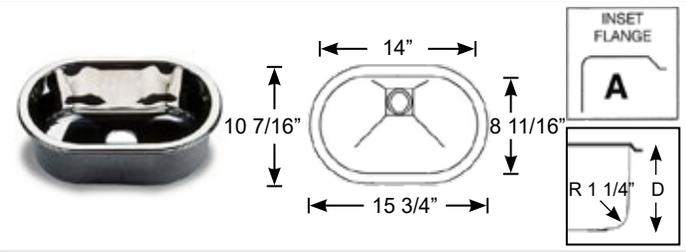

#10206	Mirror Finish	2-1/4" Drain Hole	D 6"
--------	---------------	-------------------	------



### Mirror Finish

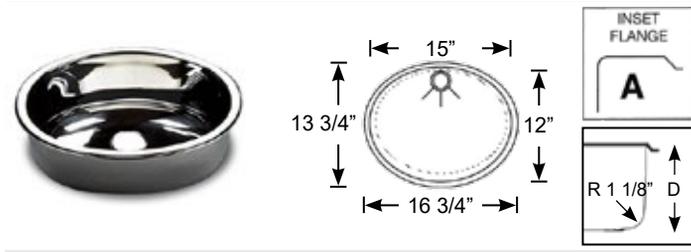

#10207	Mirror Finish	2-1/4" Drain Hole	D 6"
--------	---------------	-------------------	------



**CYLINDRICAL STAINLESS STEEL SINK**

**DIAMETER 12" - Mirror or Brushed Finish**





#10241	Mirror Finish	2-1/4" Drain Hole	D 7"
#10242	Brushed Finish	2-1/4" Drain Hole	D 5"

**DIAMETER 14" - Mirror or Brushed Finish**





#10243	Mirror Finish	2-1/4" Drain Hole	D 7"
#10247	Brushed Finish	2-1/4" Drain Hole	D 7"
#10996	Mirror Finish	2-1/4" Drain Hole	D 5"
#10244	Brushed Finish	2-1/4" Drain Hole	D 5"

**DIAMETER 15" - Mirror Finish**



#10266	Mirror Finish	2-1/4" Drain Hole	D 7"
--------	---------------	-------------------	------

**DIAMETER 18" - Mirror or Brushed Finish**




#10258	Mirror Finish	2-3/16" Drain Hole	D 7"
#14289	Brushed Finish	2-3/16" Drain Hole	D 7"



**SINGLE STAINLESS STEEL SINK**


**Mirror Finish**

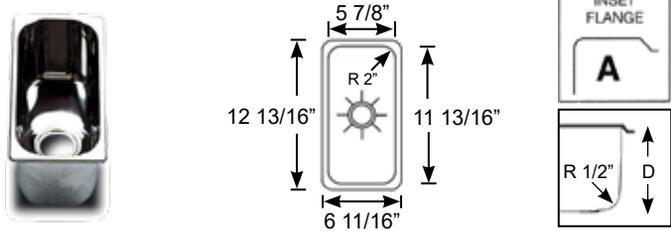

#10212 Mirror Finish 2-1/4" Drain Hole D 6"

#10213 Mirror Finish 2-1/4" Drain Hole D 7"


**Mirror Finish**

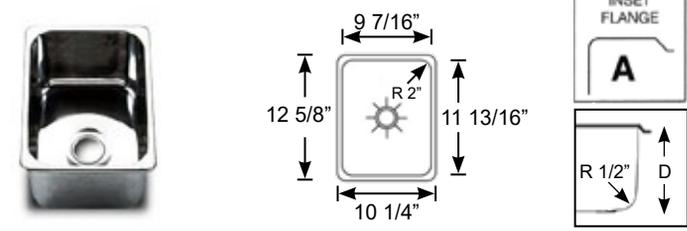

#10214 Mirror Finish 2-1/4" Drain Hole D 6"


#10215 Mirror Finish 2-1/4" Drain Hole D 8"

**Mirror Finish**

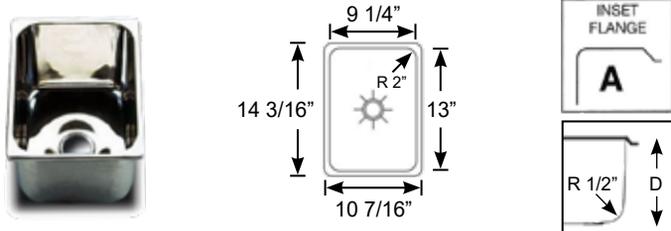


#10218 Mirror Finish 2-1/4" Drain Hole D 7"

**Mirror Finish**

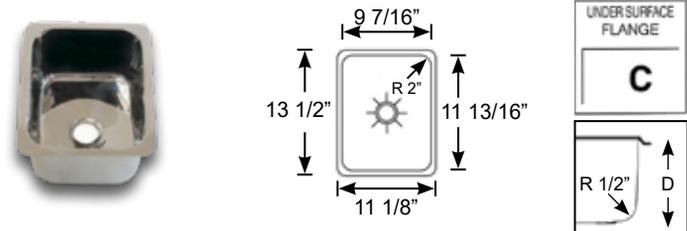

#10209 Mirror Finish 2-1/4" Drain Hole D 6"


**Mirror Finish**

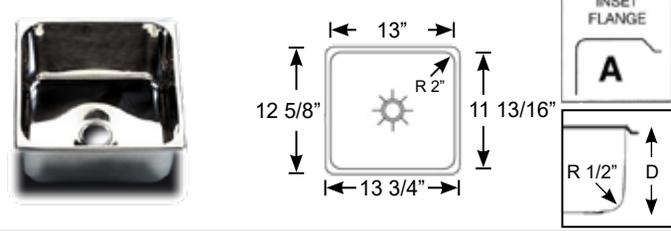

#10216 Mirror Finish 2-1/4" Drain Hole D 6"


#10217 Mirror Finish 2-1/4" Drain Hole D 8"

**Satin Finish**

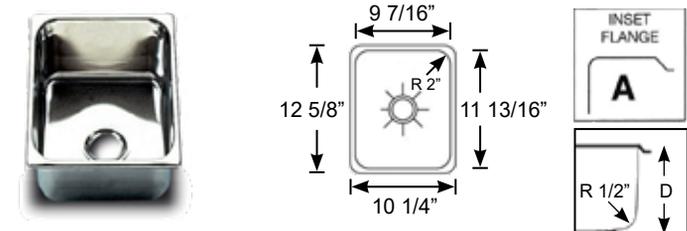


#10993 Satin Finish 2-1/4" Drain Hole D 6"

**Satin Finish**

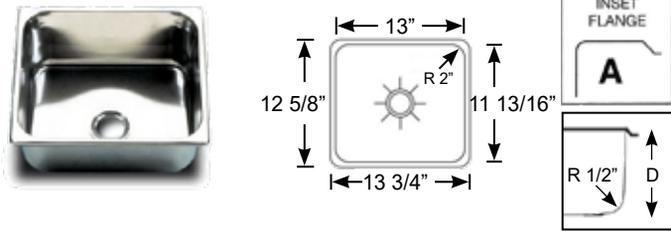


#10654 Satin Finish 2-1/4" Drain Hole D 6"

**Mirror Finish**

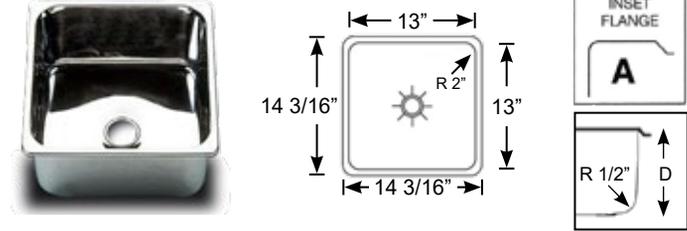


#10220 Mirror Finish 2-1/4" Drain Hole D 7"

**Mirror Finish**

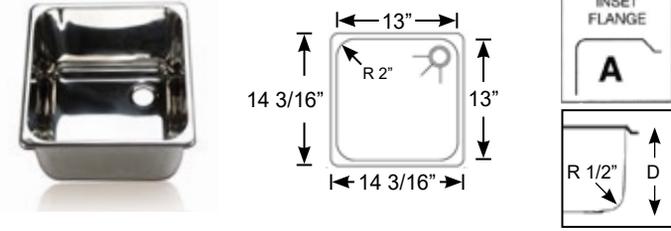

#10219 Mirror Finish 2-1/4" Drain Hole D 9-7/8"



**Mirror Finish**

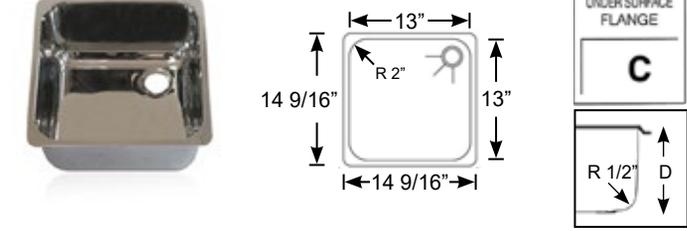

#10205 Mirror Finish 2-1/4" Drain Hole D 7"



**SINGLE STAINLESS STEEL SINK**

**Satin Finish**





**#10245** Satin Finish 2-1/4" Drain Hole D 7"

**Satin Finish**



**#10210** Satin Finish 2-1/4" Drain Hole D 8"



**Mirror Finish**

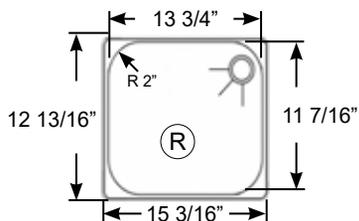

**#10222** Mirror Finish Drain Left 2-1/4" Drain Hole D 8"

**#10224** Mirror Finish Drain Right (shown) 2 5/16" Drain Hole



**Mirror Finish**



**#10223** Mirror Finish Drain Left 2 1/4" Drain Hole D 8"

**#10225** Mirror Finish Drain Right (shown) 2 1/4" Drain Hole



**Brushed Finish**



**#10651** Brushed Finish 2-1/4" Drain Hole D 8"

**Brilliant Satin Finish**



waste drain not included



**#10676** Brilliant Satin Finish 3-1/2" Drain Hole D 8"

**Brilliant Satin Finish**



waste drain not included

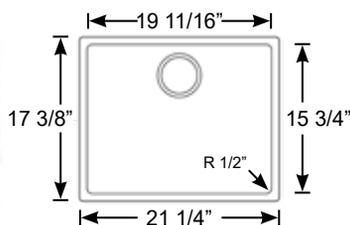

**#10677** Brilliant Satin Finish 3-1/2" Drain Hole D 8"

**Brilliant Satin Finish**



waste drain not included



**#10674** Brilliant Satin Finish 3-1/2" Drain Hole D 5 1/2"

**Brilliant Satin Finish**

waste drain not included






**#10675** Brilliant Satin Finish 3-1/2" Drain Hole D 7 3/4"



**DOUBLE STAINLESS STEEL SINK**

**Mirror Finish**



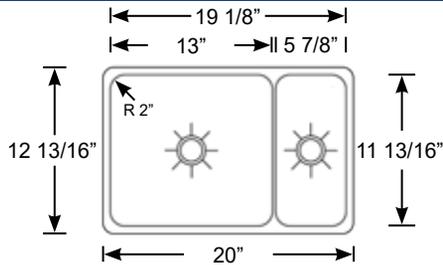


#10226 Mirror Finish

2-1/4" Drain Hole

D 6"

**Mirror Finish**

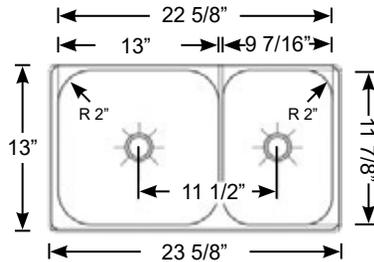

#10227 Mirror Finish

2 1/4" Drain Hole




D 6"

#10228 Mirror Finish

2 1/4" Drain Hole

D 8"

**Mirror Finish**

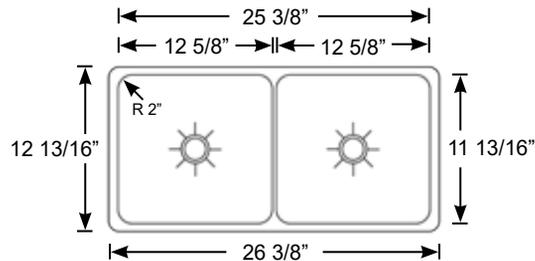

#10229 Mirror Finish

2-3/16" Drain Hole




D 6"

#10230 Mirror Finish

2-3/16" Drain Hole

D 8"

**Mirror Finish**

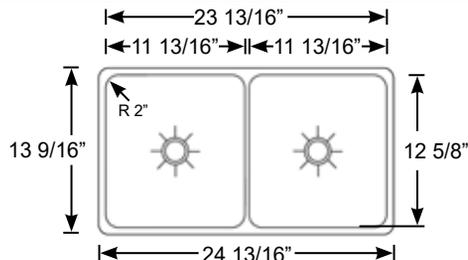

#10231 Mirror Finish

2-1/8" Drain Hole



D 6"

#10232 Mirror Finish

2-1/4" Drain Hole

D 8"

**Mirror Finish**


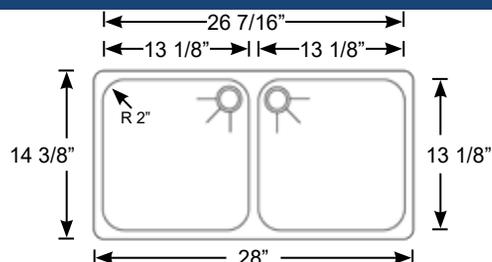


#10238 Mirror Finish

2-1/8" Drain Hole

D 8"

Mirror Finish


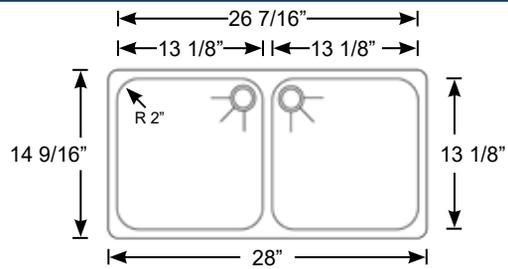


#10237 Mirror Finish

2-1/8" Drain Hole

D 8"

Satin Finish


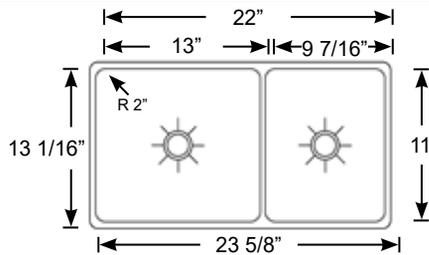


#10658 Satin Finish

2-1/4" Drain Hole

D 6"

Mirror and Satin Finish

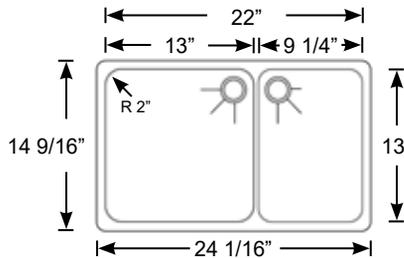

#10233 Mirror Finish

2-1/4" Drain Hole

D 6"

#10234 Mirror Finish

2-1/4" Drain Hole



D 8"

#10649 Satin Finish

2-1/4" Drain Hole

D 8"

Mirror and Satin Finish

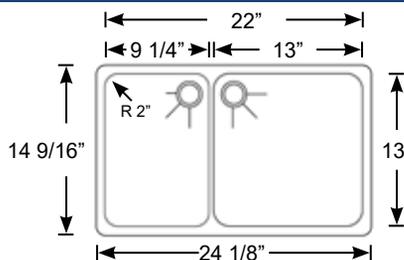

#10632 Satin Finish

2-1/4" Drain Hole

D 8"

#10235 Mirror Finish

2-1/4" Drain Hole



D 6"

#10236 Mirror Finish

2-1/4" Drain Hole

D 8"

Mirror Finish


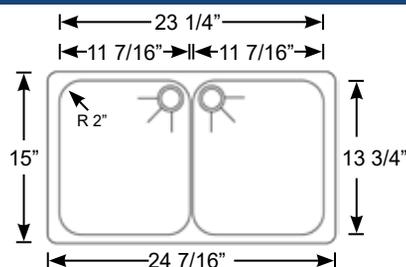


#10239 Mirror Finish

2-1/4" Drain Hole

D 8"

Mirror Finish

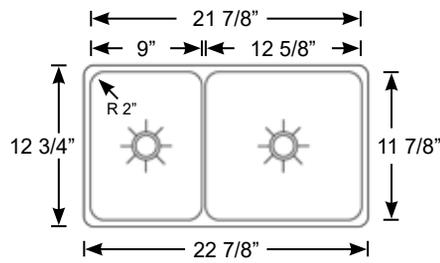



#10240 Mirror Finish

2-1/8" Drain Hole

D 8"

Brilliant Satin Finish

waste drain not included

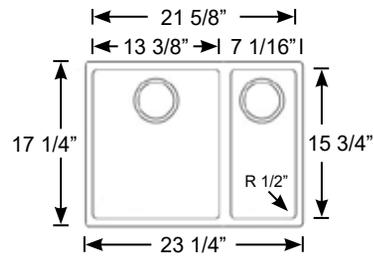

#10680 Brilliant Satin Finish


3-1/2" Drain Hole

D 8"




**PLASTIC DRAINS**

**Elbow drain for shower stalls**

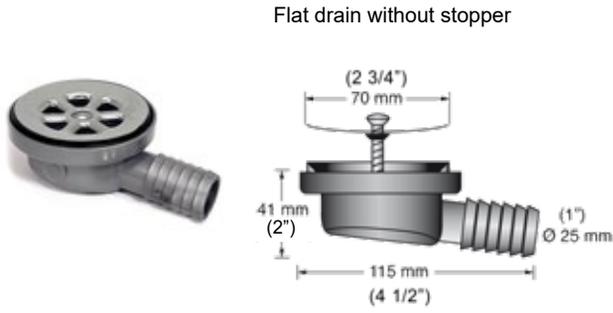


**Elbow drain with stopper**

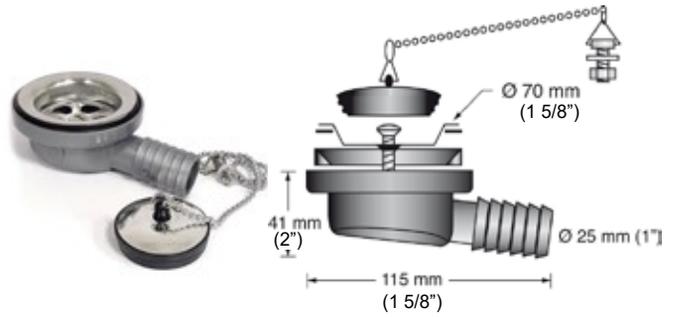


**#10307**

**Elbow drain with removable basket**

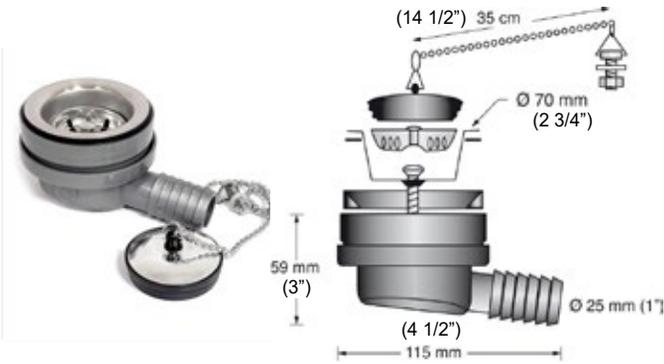


**#10306**

**1-1/2" Drain with removable basket**

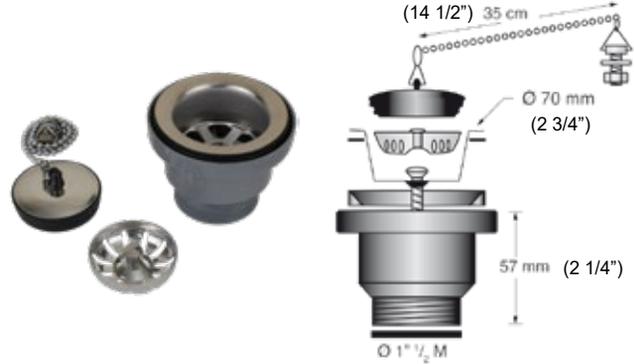


**#10308**

**1-1/2" Drain for shower stalls**

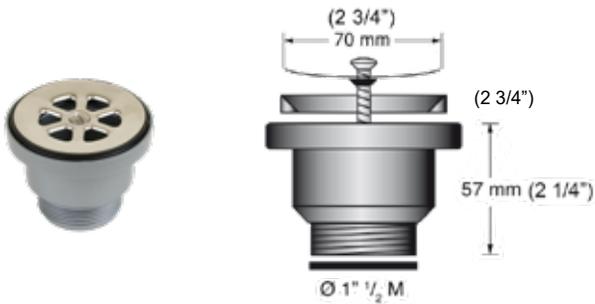


**#10313**

**Drain with stopper**

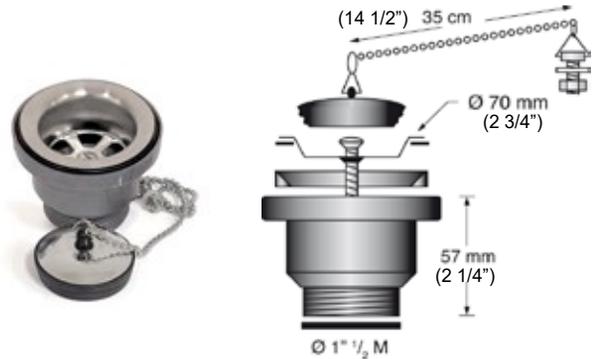

**#10352**

**3-1/2" Waste Disposal drain**

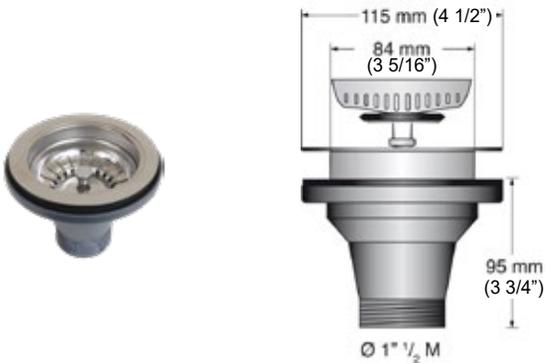

**#10312**

**Drain with handle stopper**




**#10333**

**#10300**


**PLASTIC DRAINS, ACCESSORIES AND SPARE PARTS**

**4-1/2" Double drain with baskets**

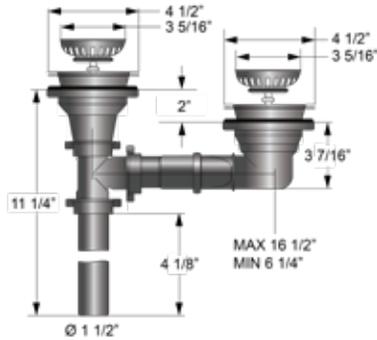


**#10346** (for sink #10680 Page 105)

**Double drain with baskets**

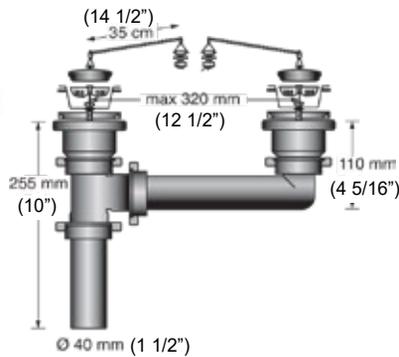


**#10311**

**Shower drain or scupper**

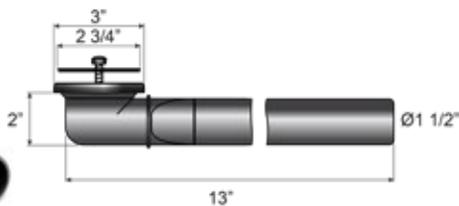


**#10338**

**Straight tube**




**#10316**

**Double drain with stoppers**

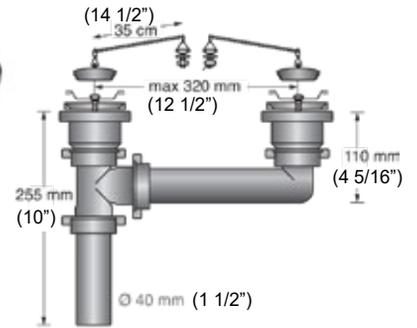


**#10310**

**3-1/2" Waste Disposal drain**

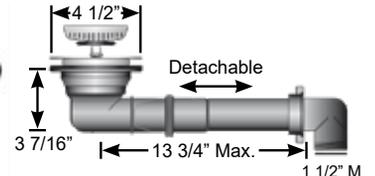


**#10340**

**Elbow Pipe for 1-1/2" Connections**

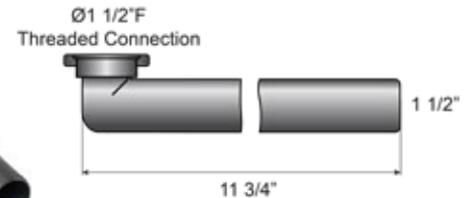

**#10315**

**"T" connection**




**#10317**

**ACCESSORIES AND SPARE PARTS**

**Plumbing**

**"T" connection**

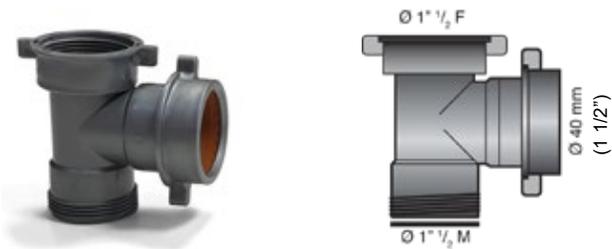

**Adaptor**




**#14076**

**Adaptor - Enlarger**




**#10318**

**Flexible Adaptor**

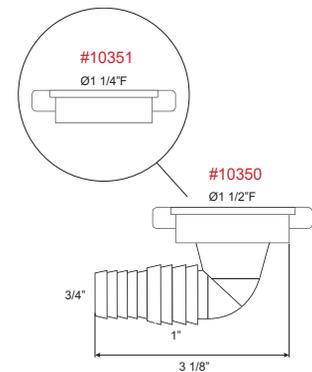


**#10347**

**Elbow tube**




**#10350 1-1/2" / #10351 1-1/4"**

**"T" connection**

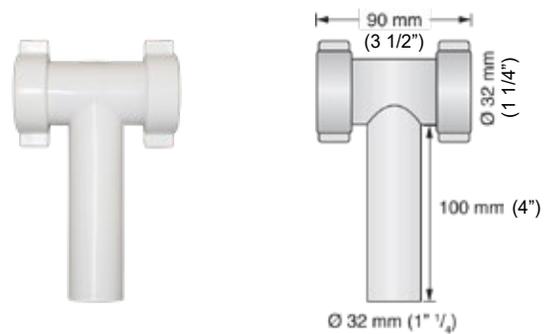

**#10301**

**Straight connection**

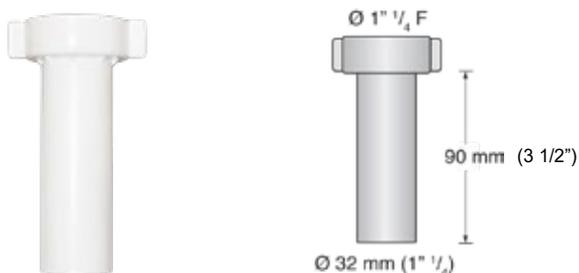

**#10302**

**Straight hose barb**




**#10303**

**#10304**

**ACCESSORIES AND SPARE PARTS**

**Straight hose barb**



**#10305**


**Stopper with handle**



Replacement Plug for drain #10300.  
Also fits drains with removable stopper  
#10306, #10308, #10311, #10313

**#10331**


**Drain with flip stopper**



Chrome plated brass  
Fits 1-7/8\" & 2 1/16\" drain hole  
1-1/2\" threaded outlet

**#19004**

**Drain with flip stopper**



Chrome plated brass  
Fits 1-5/8\" drain hole  
1-1/4\" threaded outlet

**#19006** Use with sinks #10280 & #10281

**Drain for ceramic sinks**


Pop-up stopper with overflow  
Fits 1-5/8\" drain hole  
1-1/4\" threaded outlet



Includes 1 1/4\" straight tube attachment


**#19007** Use with ceramic sink #23010

**1-1/2\" Drain P-Trap**

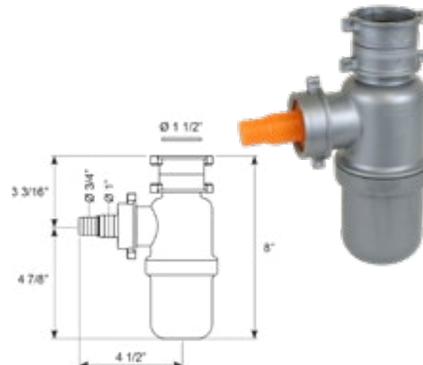


**#10341**

**Stopper with chain**

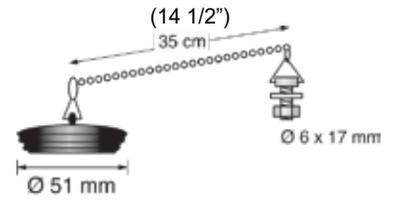

**#10309**

**Strainer basket**



Replacement Removable Basket for  
drains #10308, #10311, #10313

**#10314**

**Drain for ceramic sinks**



Pop-up stopper  
Fits 1-5/8\" drain hole  
1-1/4\" threaded outlet

**#19005**

**Drain gasket**



1 1/4\" diameter


**#14072**



1 1/2\" diameter

**#14073**

# ABFA

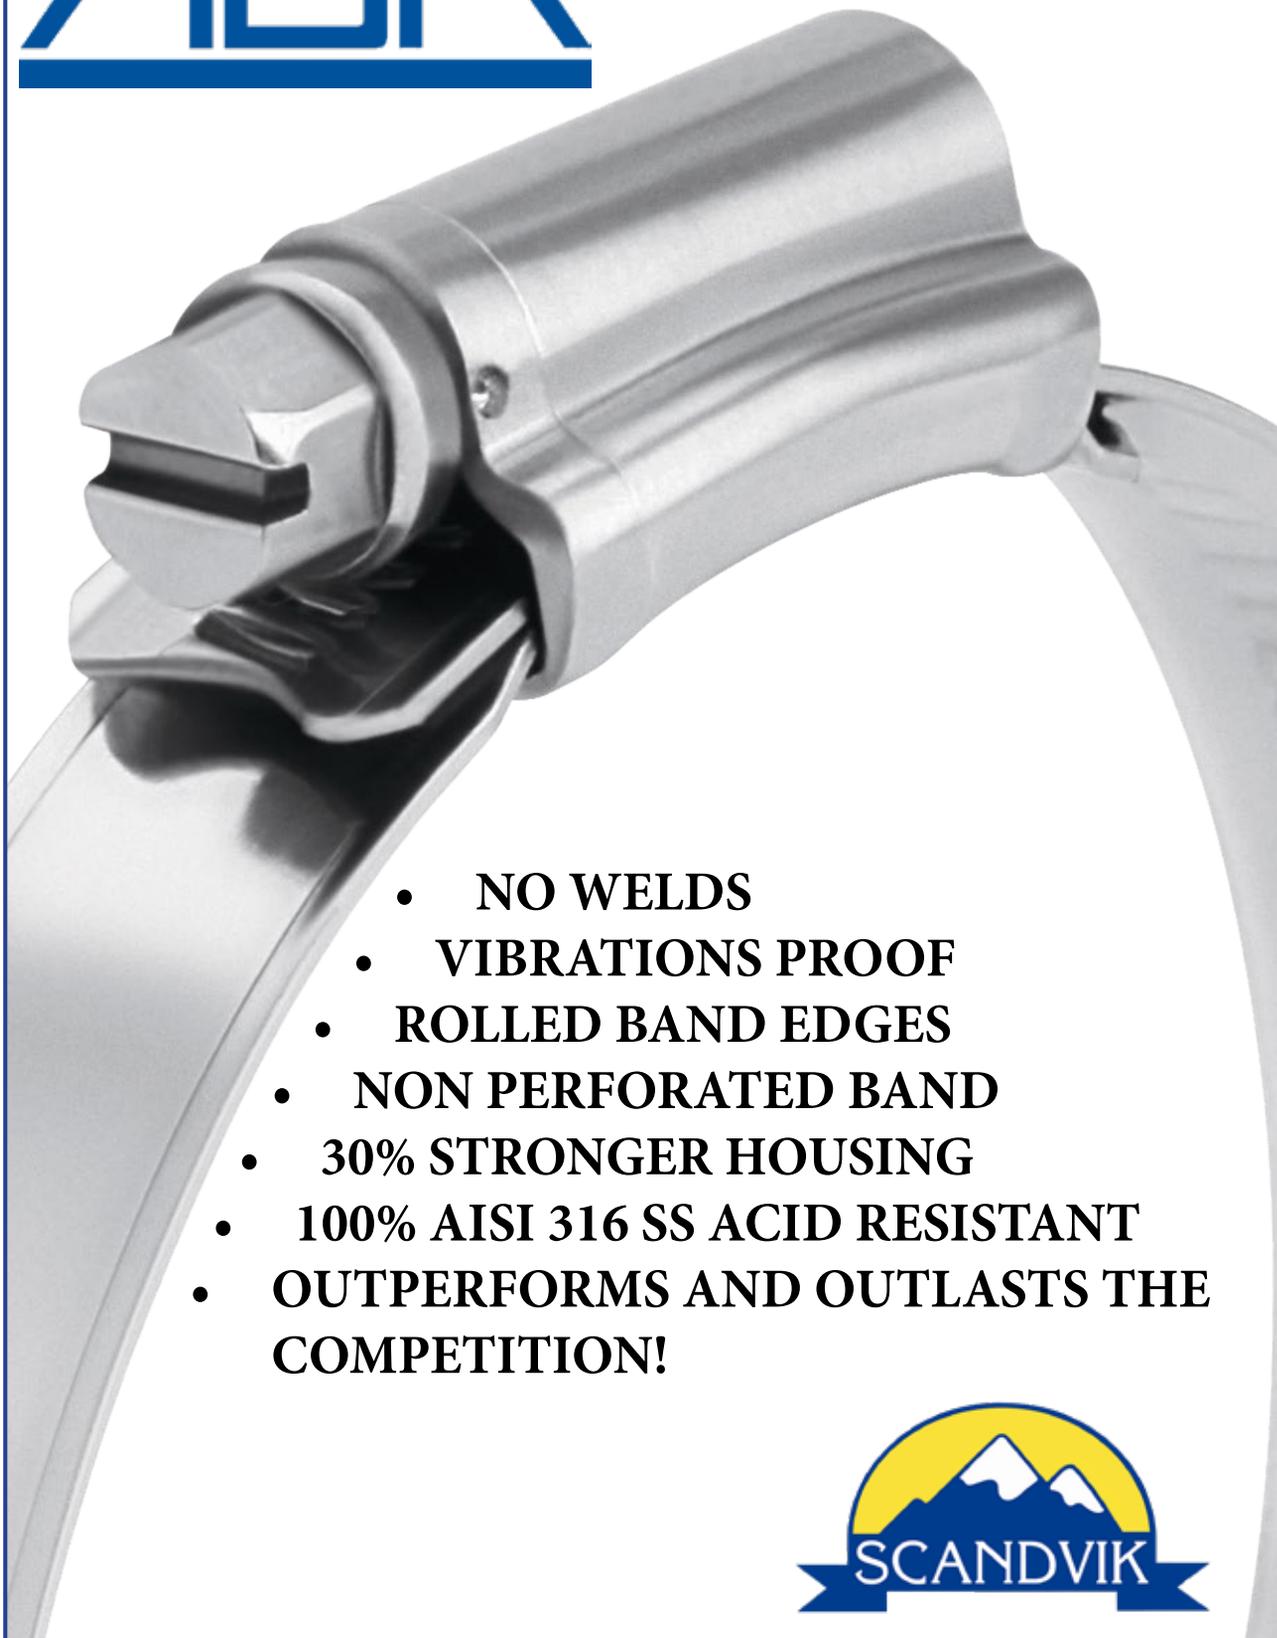

- **NO WELDS**
- **VIBRATIONS PROOF**
- **ROLLED BAND EDGES**
- **NON PERFORATED BAND**
- **30% STRONGER HOUSING**
- **100% AISI 316 SS ACID RESISTANT**
- **OUTPERFORMS AND OUTLASTS THE COMPETITION!**



ABA **316 Stainless Steel** clamps are the perfect choice for applications where premium corrosion resistance is required. All parts are made of 316 Stainless Steel.



### All Pressed Worm Gear Housing

The all pressed worm housing increases the strength of the hose clamp by 30%. Since the radius of each housing is carefully adapted to the relevant hose diameter and due to the smooth transition between housing and band, extremely good compatibility with the shape of the hose is achieved.



### Intact Grain Structure

The intact grain structure increases the strength reserve of the clamp and enables you to use an ABA clamp up to ten times. This picture, magnified 10 times, clearly shows how the material in the band is compressed at each ridge of thread without the fibers of the steel being sheared off.



### Rolled-Up Band Edges

The rolled-up band edges of the ABA hose clamp prevents it from cutting into the hose and forming such a smooth transition between the edge of the band and the hose that crack formation and fractural impressions are avoided. Consequently even inexpensive hoses last longer. The threads are specially stamped and leave the inside of the clamp completely smooth. The smooth inside of the band eliminates friction between the hose and the band, thus the clamp will seal 360° around.



### Thread Engagement

Thread engagement gives strength and reliability. The square threads of the screw are rolled and those on the band stamped by a special process. The 6° thread pitch angle not only gives you a completely vibration-proof clamp but also a clamp which grips the hose more firmly all the way around without calling for more force on the screwdriver.



### Parts Inspection

During the manufacturing process, the ABA hose clamp passes through nine series of inspections covering material, tolerances and properties. To give one example, the clamp is test-loaded to predetermined tightening torque. The off-load torque, which should not exceed 1 Nm, is checked on every 50th clamp.

## ABA Mini (W4) 304 Stainless Steel

A nut-and-bolt hose clamp with rolled edges that is ideally suited for small, thin-walled hydraulic and fuel hose.



### Strong and Durable Materials

The lug for the screw and nut must be stable enough to resist deformation whenever the nut is tightened. This is why they are made of cold rolled strip stainless steel to Swedish Standard SS 1265.

### The Nut Stays Put

The nut is retained in the lug, even when the screw has been removed. Another practical detail is the hexagonal screw head, which may be tightened using the ABA flexible socket driver.


7mm Hex-head screw



9mm Band Width




Box of 50



### Reinforced Band Tongue

The band tongue is designed with a formed section to prevent it from being deformed and causing leakage.



### Small Size But Big Demands

This was the concept when designing the ABA Mini Clamp. As a result, the Mini features several well-known ABA characteristics including the rounded edges that ensure the clamp grips the hose firmly but gently.

Packaging		Size mm	Clamping Range		Band Width
Bag of 50	Box of 10		Inches	mm	mm
22008	13508	8	19/64 - 21/64	7.5 - 8.5	9
22009	13509	9	21/64 - 3/8	8.5 - 9.5	
22010	13510	10	3/8 - 7/16	9.5 - 11	
22011	13511	11	13/32 - 15/32	10.5 - 12	
22012	13512	12	29/64 - 33/64	11.5 - 13	
22013	13513	13	1/2 - 35/64	12.5 - 14	
22014	13514	14	17/32 - 19/32	13.5 - 15	
22015	13515	15	37/64 - 5/8	14.5 - 16	
22016	13516	16	19/32 - 43/64	15 - 17	
22017	13517	17	5/8 - 45/64	16 - 18	

## ABA Original (W5) 316 Stainless Steel

Clamp with a one-piece housing and embossed worm-drive band with rolled edges. This industry leader out performs and outlasts the competition!



7mm Hex-head screw



Units: mm



Hose Clamps

Packaging		SAE Size	Clamping Range		Band Width mm	Tightening Torque Inch - Lbs.
Bag of 50	Box of 10		Inches	mm		
13014	13614	3	5/16 - 9/16	8 - 14	9	20 - 35
13017	13617	4	7/16 - 11/16	11 - 17		
13020	13620	6	1/2 - 13/16	13 - 20		
13024	13624	8	5/8 - 1	15 - 24	12	35 - 45
13028	13628	10	3/4 - 1 1/8	19 - 28		
13032	13632	12	7/8 - 1 1/4	22 - 32		
13038	13638	16	1 1/16 - 1 1/2	26 - 38		
13044	13644	20	1 1/4 - 1 3/4	32 - 44		
13050	13650	24	1 1/2 - 2	38 - 50		45 - 60
66057	13657	28	1 1/4 - 2 1/4	32 - 57		
66064	13664	32	1 1/2 - 2 1/2	38 - 64		
66070	13670	36	1 3/4 - 2 3/4	44 - 70		
66076	13676	40	2 - 3	51 - 76		
66083	13683	44	2 1/4 - 3 1/4	57 - 83		
66089	13689	48	2 1/2 - 3 1/2	64 - 89		
66095	13694	52	2 3/4 - 3 3/4	70 - 95		
66102	13696	56	3 - 4	76 - 102		
66108	13697	60	3 1/4 - 4 1/4	83 - 108		
66114	13698	64	3 1/2 - 4 1/2	89 - 114	45 - 60	
66127	13699	72	3 1/2 - 5	89 - 127		
EACH	Bag of 10					
66140	66140P	80	4 - 5 1/2	102 - 140		
66152	66152P	88	4 1/2 - 6	114 - 152		
66165	66165P	96	5 - 6 1/2	127 - 165		
66178	66178P	104	5 1/2 - 7	140 - 178		
66191	n/a	112	6 - 7 1/2	152 - 191		
66203	n/a	120	6 1/2 - 8	165 - 203		
66216	n/a	128	7 - 8 1/2	178 - 216		
66232	n/a	138	7 5/8 - 9 1/8	194 - 232		
66257	n/a	154	8 5/8 - 10 1/8	219 - 257		
66283	n/a	170	9 5/8 - 11 1/8	244 - 283		
66308	n/a	186	10 5/8 - 12 1/8	270 - 308		


# BREEZE 316 STAINLESS STEEL CLAMPS

## Breeze Mini, 316 Stainless Steel

A lightweight, streamlined hose clamp generally used in small diameter applications such as air and fuel lines. 5/16" band with engineered perforations, three-piece construction, SAE standard J1508 type M, 1/4" hex screw, 5/16" band and one-piece housing all in **316 stainless steel**.  
Made in the USA!



Packaging	SAE	Clamping Range		Band Width
		Inches	mm	inch
Box of 10				5/16
50010	4	7/32 - 5/8	6 - 16	
50011	6	7/16 - 25/32	11 - 20	
50012	8	1/2 - 29/32	13 - 23	
50013	10	9/16 - 1-1/16	14 - 27	
50014	16	15/16 - 1-1/2	24 - 38	
50015	20	1-3/16 - 1-3/4	30 - 44	
50016	24	1-7/16 - 2	37 - 51	
50017	28	1-11/16 - 2-1/4	43 - 57	




Band Width: 5/16"  
Hex Screw: 1/4"

## Breeze Power-Seal®, 316 Stainless Steel

A general purpose marine quality worm-drive hose clamp with engineered perforations for added strength. 1/2" band with engineered perforations, quadra-lock construction, SAE standard J1508 type F, 5/16" hex screw, 1/2" band and two-piece housing all in **316 stainless steel**.  
Made in the USA!




Packaging	SAE	Clamping Range		Band Width
		Inches	mm	inches
Box of 10				1/2
50030	6	7/16 - 25/32	11 - 20	
50031	8	1/2 - 29/32	13 - 23	
50032	10	9/16 - 1-1/16	14 - 27	
50033	12	11/16 - 1-1/4	17 - 32	
50034	16	13/16 - 1-1/2	21 - 38	
50035	20	13/16 - 1-3/4	21 - 44	
50036	24	1-1/16 - 2	27 - 51	
50037	28	1-5/16 - 2-1/4	33 - 57	
50038	32	1-9/16 - 2-1/2	40 - 64	
50039	36	1-13/16 - 2-3/4	46 - 70	
50040	40	2-1/16 - 3	52 - 76	
50041	44	2-5/16 - 3-1/4	59 - 83	
50042	48	2-9/16 - 3-1/2	65 - 89	
50043	52	2-13/16 - 3-3/4	71 - 95	
50044	56	3-1/16 - 4	78 - 102	
50045	60	3-5/16 - 4-1/4	84 - 108	
50048	72	1-7/8 - 5	48 - 127	
50049	80	2-1/2 - 5-1/2	64 - 140	



Band Width: 1/2"  
Hex Screw: 5/16"



# BREEZE CONSTANT-TORQUE® CLAMPS

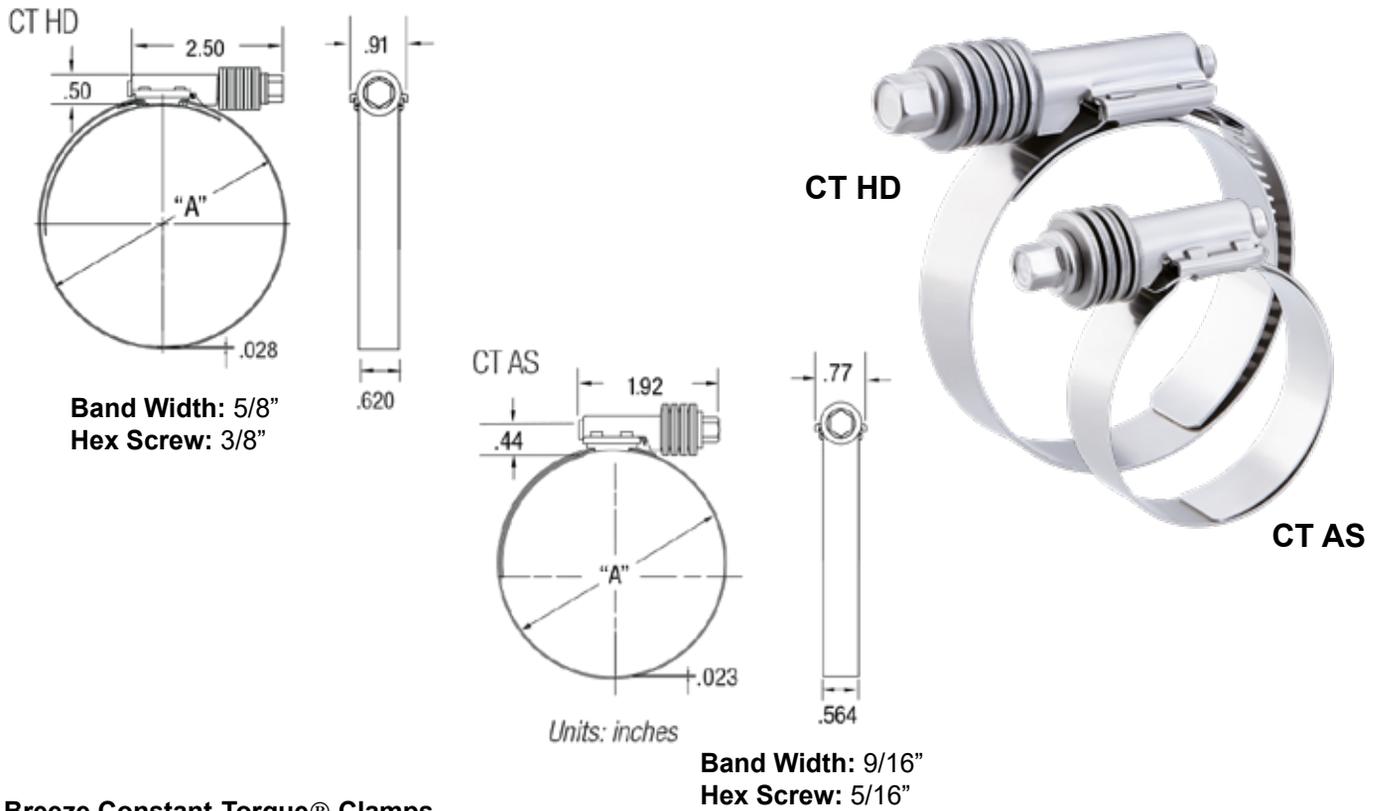

Hose Clamps

## Breeze Constant-Torque® Clamps

A worm drive hose clamp that automatically increases or decreases diameter due to changes in temperature. Extended inner liner, constant-tension performance, SAE standard J1508 type SLF & SLHD, 410 stainless steel hex screw, 300-series stainless steel band and stainless steel Belleville washers. Made in the USA!


Type	Packaging	SAE	Clamping Range		Band Width
	Box of 10		Inches	mm	inches
CT AS	50200	10	9/16 - 1-1/16	14 - 27	9/16
	50201	16	13/16 - 1-1/2	21 - 38	
	50202	24	1-1/16 - 2	27 - 51	
CT HD	50203	212	1-1/4 - 2-1/8	32 - 54	5/8
	50204	262	1-3/4 - 2-5/8	45 - 67	
	50205	312	2-1/4 - 3-1/8	57 - 79	
	50206	362	2-3/4 - 3-5/8	70 - 92	
	50207	412	3-1/4 - 4-1/8	83 - 105	
	50208	462	3-3/4 - 4-5/8	95 - 118	
	50209	512	4-1/4 - 5-1/8	108 - 130	
	50210	562	4-3/4 - 5-5/8	121 - 143	
	50211	612	5-1/4 - 6-1/8	133 - 156	
	50212	662	5-3/4 - 6-5/8	146 - 168	
	50213	712	6-1/4 - 7-1/8	159 - 181	
	50214	762	6-3/4 - 7-5/8	172 - 194	
	50215	812	7-1/4 - 8-1/8	184 - 206	
	50216	862	7-3/4 - 8-5/8	197 - 219	
	50217	912	8-1/4 - 9-1/8	210 - 232	
	50219	1112	10-1/4" - 11-1/8"	260 - 283	



## Heavy-Duty GBS (W5) Stainless Steel



Heavy Duty low profile bolt clamps. Particularly suited for sealing exhaust, pressure or suction lines with plastic or steel inserts and high shore hardness values. Their distinguishing feature is the extremely high band tensile force. Assembly is easily completed by means of either manual, pneumatic or electric standard tools.

### TECHNICAL FEATURES

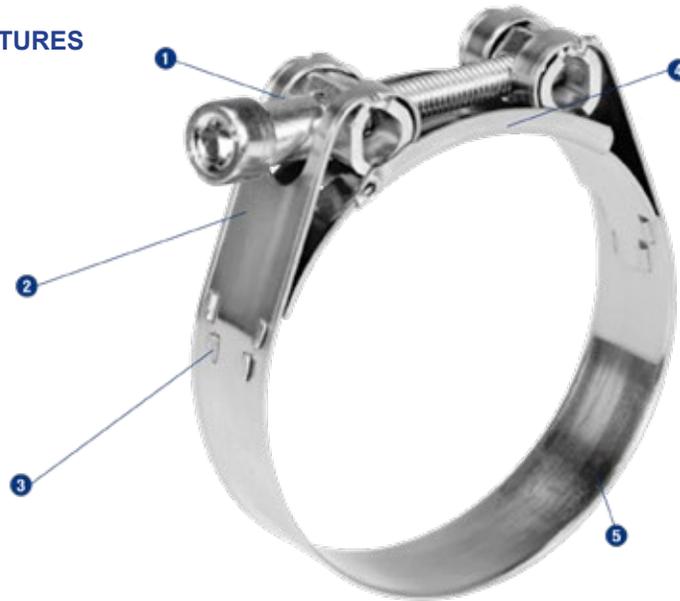

**NORMA**

1. New specially designed 6mm hexagonal socket screw with integrated spacer = improved efficiency.
2. Reinforced loops = allow to withstand significantly higher torques.
3. Mechanically locked closure = no welding points, no contact corrosion.
4. Bridge = optimal hose protection.
5. Robust band with rounded edges = protection against injuries and damage to the hose surface.



- Band, Screw & Housing: High Grade Stainless Steel throughout (1.4401/AISI 316)
- Hollow Trunnions
- Diameter Range: 1 1/16" - 12" (17mm - 304mm)
- Available in 4 Band Widths: 18mm - thickness 0.6mm, 20mm - thickness 0.8mm, 25mm - thickness 1.0mm and 30mm - thickness 1.0mm
- Recommended tightening torque: 18mm band = 8 Nm, 20mm band = 10 Nm, 25mm band = 20 Nm, 30mm band = 25 Nm
- Fracture torque: 18mm band = 15 Nm, 20mm band = 20 Nm, 25mm band = 30 Nm, 30mm band = 45 Nm.

## Heavy-Duty GBS (W5) Stainless Steel

EACH Part #	Packaging Box of 10	Clamping Range		Band Width	
		Inches	mm	Inches	mm
67000	67100	11/16 - 3/4	17 - 19	11/16	18
67001	67101	3/4 - 13/16	19 - 21		
67002	67102	13/16 - 7/8	21 - 23		
67003	67103	7/8 - 1	23 - 25		
67004	67104	1 - 1 1/16	25 - 27		
67005	67105	1 1/16 - 1 1/8	27 - 29		
67006	67106	1 1/8 - 1 1/4	29 - 31		
67007	67107	1 1/4 - 1 5/16	31 - 34		
67008	67108	1 5/16 - 1 7/16	34 - 37		
67009	67109	1 7/16 - 1 9/16	37 - 40		
67010	67110	1 9/16 - 1 11/16	40 - 43		
67011	67111	1 11/16 - 1 7/8	43 - 47		
67012	67112	1 7/8 - 2	47 - 51		
67013	67113	2 - 2 3/16	51 - 55		
67014	67114	2 3/16 - 2 5/16	55 - 59		
67015	67115	2 5/16 - 2 1/2	59 - 63		
67016	67116	2 1/2 - 2 11/16	63 - 68		
67017	67117	2 11/16 - 2 7/8	68 - 73	1	25
67018	67118	2 7/8 - 3 1/8	73 - 79		
67019	67119	3 1/8 - 3 3/8	79 - 85		
67020	67120	3 3/8 - 3 9/16	85 - 91		
67021	67121	3 9/16 - 3 13/16	91 - 97		
67022	67122	3 13/16 - 4 1/8	97 - 104		
67023	67123	4 1/8 - 4 7/16	104 - 112		
67024	67124	4 7/16 - 4 3/4	112 - 121		
67025	67125	4 3/4 - 5 1/8	121 - 130		
67026	67126	5 1/8 - 5 1/2	130 - 140		
67027	67127	5 1/2 - 5 7/8	140 - 150		
67038	67138	5 7/8 - 6 3/8	150 - 162	1 3/16	30
67028	67128	6 3/8 - 6 7/8	162 - 174		
67029	67129	6 7/8 - 7 3/8	174 - 187		
67030	67130	7 3/8 - 7 7/8	187 - 200		
67031	67131	7 7/8 - 8 3/8	200 - 213		
67032	67132	8 3/8 - 8 7/8	213 - 226		
67033	67133	8 7/8 - 9 3/8	226 - 239		
67034	67134	9 3/8 - 9 15/16	239 - 252		
67035	67135	9 15/16 - 10 7/16	252 - 265		
67036	67136	10 7/16 - 11	265 - 278		
67037	67137	11 1/2 - 12	291 - 304		

Hose Clamps



## Vibration Dampening Support

To properly guard sensitive items from damage due to vibration use ABA Rubber Lined Clamps. Ideal for pipes, cables, groups of cables, hoses, etc. The clamp is made of 304 stainless steel with a rubber liner that also protects the band edges. Impacts and vibrations are dampened by the rubber which also eliminates wear and tear.

## Applications

ABA rubber lined clamps are used in the automotive and marine industries, mechanical and apparatus construction, electrical, hydraulic and pneumatic engineering, process industries, shipbuilding, refrigeration and freezing plants, etc.

Packaging		Clamping Range		Band Width
Bag of 50	Box of 10	Inches	mm	mm
32301	13301	3/16	5	12
32302	13302	1/4	6	
32303	13303	5/16	8	
32304	13304	3/8	10	
32305	13305	7/16	11	
32306	13306	1/2	13	
32307	13307	9/16	14	
32308	13308	5/8	16	
32310	13310	3/4	19	
32312	13312	7/8	22	
32314	13314	1	25	
32316	13316	1 1/8	29	
32318	13318	1 1/4	32	
32320	13320	1 3/8	35	
32322	13322	1 1/2	38	
32323	13323	1 3/4	45	

# ABA and Breeze Clamp Assortments / Accessories

Hose Clamps



## ABA Cruiser Pack

Contains 56 assorted ABA

**316 stainless steel** clamps and 1

#60002 Flexible nut driver

**Dimensions:** 14" L x 9" W x 2" D

**Shipping Weight:** 5 Lbs.

#31606 Plastic Case with **316 Original Stainless Steel** Clamps

Clamp #	Quantity	SAE Size
<b>13017</b>	10	4
<b>13020</b>	10	6
<b>13028</b>	10	10
<b>13038</b>	10	16
<b>13050</b>	8	24
<b>66064</b>	8	32

## Breeze Cruiser Pack

Contains 50 assorted Breeze **316 stainless steel** clamps and tail sleeves.

**Dimensions:** 14" L x 9" W x 2" D

**Shipping Weight:** 5 Lbs.

#50105 Plastic Case with **316 Stainless Steel** Clamps

Clamp #	Quantity	SAE Size
<b>50010</b>	10	4
<b>50012</b>	10	8
<b>50032</b>	10	10
<b>50035</b>	10	20
<b>50038</b>	10	32

## Flexible 7mm Socket Drivers



#60002 10" Length

#60003 24" Length

## Blue Clamp Tail Sleeves



#31601P 5/16" 25 Pack

#31602P 5/16" 100 Pack

#31611P 1/2" 25 Pack

#31612P 1/2" 100 Pack

# ABA and Breeze Display Racks

Hose Clamps



## Counter Top Display Rack

Contains 90 assorted ABA 316 Original stainless steel hose clamps.

**Dimensions:** 23 1/4"W x 12 1/2"H x 7"D

**Shipping Weight:** 17 Lbs.

**#31604** Rack with 316 Stainless Steel Clamps

**#24401** Display Rack Only

## Breeze Counter Top Display Rack

Contains 90 assorted Breeze **316** Stainless Steel hose clamps.

**Dimensions:** "W x "H x "D

**Shipping Weight:** Lbs.


**#50100** Rack with 316 Stainless Steel Clamps

**#24402** Display Rack Only

Clamp #	Quantity	Range mm	SAE Size
13017	10	11 - 17	4
13020	10	13 - 20	6
13028	10	19 - 28	10
13032	10	22 - 32	12
13044	10	32 - 44	20
13050	10	38 - 50	24
66057	10	32 - 57	28
66064	10	38 - 65	32
66070	10	44 - 70	32

Clamp #	Quantity	Range mm	SAE Size
50010	10	6 - 16	4
50011	10	11 - 20	6
50032	10	14 - 27	10
50033	10	17 - 32	12
50035	10	21 - 44	20
50036	10	27 - 51	24
50037	10	33 - 57	28
50038	10	40 - 64	32
50039	10	46 - 70	36


Scandvik Lighting

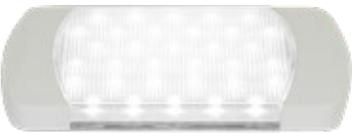

## LED Ceiling Lights

### A2.5 Flush Mount 2.5" 4 COLOR LED Down Light

Scandvik's A2.5 LED Down Light with class leading output, sealed weatherproof construction and simple 2-wire installation is a favorite amongst boat builders. Intelligent circuitry allows color changing from White, Blue, Red, Green without specialized switches or controllers. Only a simple 2-position (on/off) toggle switch is needed. Switch light off and on again within 1.5 seconds to cycle through each of the four colors. Turning the light off for more than 1.5 seconds resets the light to White. This **316 Stainless Steel** fixture is suitable for overhead exterior locations such as T-tops, hard tops and mezzanines. Simple butterfly clips hold the A2.5 firmly in place.

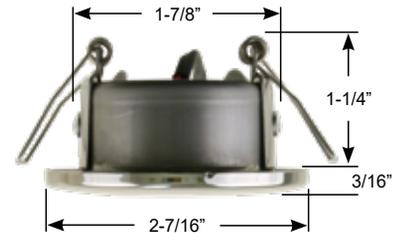

#### #41416P A2.5 4-COLOR Down Light

- 286 Lumen (Daylight White 5500-6300K)
- 10-30 VDC
- IP67



### A3 Flush Mount 3" LED Down Light

Scandvik's A3 LED Down Light is offered as single or bi-color lighting and can be dimmed when paired with the Tortuga PWM dimmer. A3 features a snap over bezel in Polished **316 Stainless Steel**, White or Black polycarbonate. A3 mounts securely overhead using just two flathead screws (included). Single color light are 2-wire (on/off) and bi-color are 3-wire (on/off/on). It is a good choice for general lighting on smaller boats or as under cabinet lighting for any size vessel. Other applications include hard tops, arches, walkway overhangs and shower stalls.




316 Stainless Steel Trim




White Plastic Trim



Black Plastic Trim



2-3/4" SS Trim



3" Plastic Trim

- 170 Lumen (Warm White 2900-3200K)
- 242 Lumen (Cool White 5500-6300K)
- 12 VDC
- IP67



#### Warm White

- #41368P Flush Mount, **316 Stainless Steel** Trim
- #41379P Flush Mount, White Trim
- #41393P Flush Mount, Black Trim
- #41300P Flush Mount packaged with SS, White & Black Trim

#### Cool White

- #41420P Flush Mount, **316 Stainless Steel** Trim
- #41421P Flush Mount, White Trim
- #41422P Flush Mount, Black Trim
- #41301P Flush Mount packaged with SS, White & Black Trim

#### Dual Color, Warm White with Blue Night Light

- #41376P Flush Mount, **316 Stainless Steel** Trim
- #41377P Flush Mount, White Trim
- #41394P Flush Mount, Black Trim
- #41302P Flush Mount packaged with SS, White & Black Trim

#### Dual Color, Warm White with Red Night Light

- #41386P Flush Mount, **316 Stainless Steel** Trim
- #41385P Flush Mount, White Trim
- #41395P Flush Mount, Black Trim
- #41303P Flush Mount packaged with SS, White & Black Trim

# LED Ceiling Lights

## A3 Surface Mount 3" LED Down Light



- White Trim**  
**#41317P** Surface Mount, **Warm White**  
**#41423P** Surface Mount, **Cool White**  
**#41380P** Surface Mount, **White/Blue**



- 316 Stainless Steel Trim Ring with Chromed Plastic Spacer**  
**#41373P** Surface Mount, **Warm White**  
**#41378P** Surface Mount, **Warm White with Blue**  
**#41387P** Surface Mount, **Warm White with Red**



## A3C Flush Mount LED Down Light

Scandvik's A3C LED Down Light is offered as a single or bi-color lighting and can be dimmed when paired with the Tortuga PWM dimmer. A3C features a snap over bezel in Polished **316 Stainless Steel**, White or Black polycarbonate. A3C mounts with 2 simple butterfly clips and/or two flat head screws. It is a good choice for general lighting in the headliner or as under cabinet lighting for any size vessel. Other applications include hard tops, arches, walkways, overhangs and shower stalls.




316 Stainless Steel Trim



White Plastic Trim



Black Plastic Trim

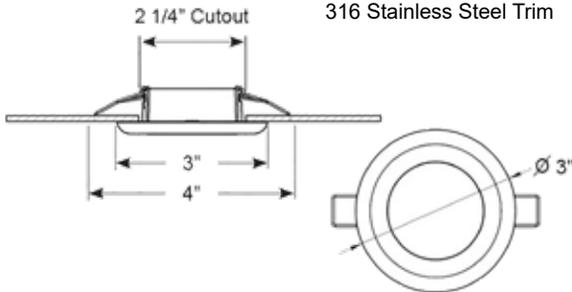

- 300 Lumen (Warm White 2900-3200K)
- 12 VDC
- IP67

- #41290P** Warm White (stainless steel, white and black trim rings)  
**#41291P** Cool White (stainless steel, white and black trim rings)  
**#41292P** Warm White/Blue (stainless steel, white and black trim rings)  
**#41293P** Warm White/Red (stainless steel, white and black trim rings)

## S3 Surface Mount 2-Color LED Down Light

Scandvik's S3 LED **slim (7/16" profile)** surface mount down light is offered as a bi-color (White/Blue) light. The S3 is a 3-wire fixture (on/off/on) and features a snap over bezel in Polished **316 Stainless Steel** or White polycarbonate. The light is secured with two mounting screws (included) and is designed for T-Tops and hard top applications. This light is not available in single color however it is often used as such by terminating the third leg.




Diameter:  
 2-7/8" - Stainless Steel Trim  
 2-3/4" - White trim



- #41670P** Cool White/Blue - Stainless Steel Trim  
**#41671P** Warm White/Blue - Stainless Steel Trim  
**#41672P** Cool White/Blue - White Trim  
**#41673P** Warm White/Blue - White Trim



- 228 Lumen White / 48 Lumen Blue
- 10-30 VDC
- IP67



# LED Ceiling Lights


## B3 Surface Mount LED Down Light

Scandvik's B3 LED **slim (3/8" profile)** surface mount single color down light is manufactured to be simple and budget friendly. The SS polished snap over trim ring is a nice upgrade from the inferior chrome plastic bezels of the past. The fixture is popular as a T-Top light as it looks like a flush mount light without the hassle of cutting holes.



- 95 Lumen White / 13 Lumen Blue
- 10-30 VDC
- IP67

**#41320P** Cool White  
**#41321P** Blue

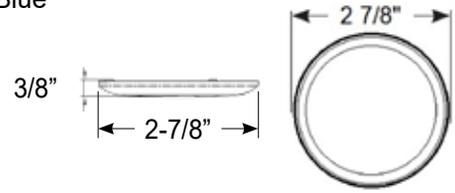

## R3 Gimbal Recessed Mount LED Down Light

Scandvik's R3 LED Down Light is offered as a high power 3W single warm white (2850-3200K) or 4-color RGBW. The adjustable eyeball design with 15-degree tilt to highlight bars, galleys and artwork. Intelligent circuitry allows color changing from White, Blue, Red, Green without specialized switches or controllers. Only a simple 2-position toggle switch is needed (on/off). Switch light off and on again with 1.5 seconds to cycle through each of the four colors. Turning the light off for more than 1.5 seconds resets the light to White. Single color WW fixture is dimmable. Simple butterfly clips hold the R3 firmly in place.





- 70-80 Lumen Warm White (2850-3200K)
- 10-30 VDC
- IP65
- Mounting Hole: 2-5/8"
- Dimensions: 3-1/8" Dia. x 1-3/8" D

**#41483P** Warm White

- White (5500-6300K)
- 8-30 VDC
- IP65
- Mounting Hole: 2-5/8"
- Dimensions: 3-1/8" Dia. x 3/4" D

**#41484P** RGBW - 4 Color




## A4 LED Down Light



- 180 Lumens Warm White (4500K)
- 10-30 VDC
- IP67

**#41369P** 4" LED Warm White Ceiling Light  
**#41559P** 4" LED 4-Color Ceiling Light  
*(Lumens W:204 G:137 B:31 R:30)*




## A6 LED Down Light



- 350 Lumens Warm White (4500K)
- 10-30 VDC
- IP67

**#41370P** 6" LED Warm White Ceiling Light  
**#41561P** 6" LED 4-Color Ceiling Light  
*(Lumens W:264 G:180 B:38 R:44)*

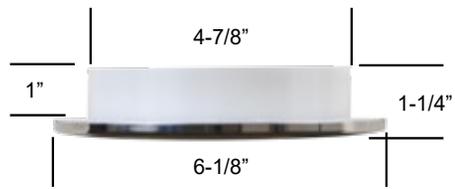

Lighting

## Surface Mount Ceiling / Dome Lights

### LED Dual-Color Low-Profile Dome Light



- Lumens: White:320 / Blue:45
- 12/24 VDC, 6 W
- 30 LED Warm White (2900-3200K)
- 26 LED Blue
- Plastic housing
- Surface mount
- IP65
- Touch Switch
- Switch glows Blue




**#41461P** LED Warm White / Blue

- Lumens: White:320 / Red:60
- 12/24 VDC, 6 W
- 30 LED Warm White (2900-3200K)
- 26 LED Red
- Plastic housing
- Surface mount
- IP65
- Touch Switch
- Switch glows Blue



**#41462P** LED Warm White / Red

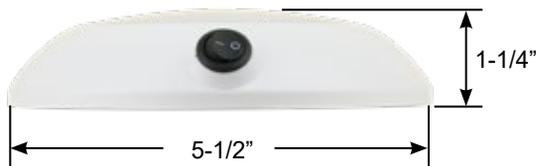

- 328 Effective Lumens
- 12 VDC, 4.4W
- Dimmable when connected to an external dimming module (steady volt, non PWM)
- 24 x 0.2 Watt 2835 LEDs
- Warm White (2900-3200K)
- Plastic housing with high impact plastic lens
- Surface Mount
- IP66

**#41340P** LED Ceiling Light with Switch



3/4" High

- 720 Effective Lumens
- 12/24 VDC
- 51 x 0.5 Watt 2835 LEDs
- Natural White (4500K)
- Plastic housing with high impact plastic lens
- Surface mount, 3 SS Screws Included
- IP67
- Three Stage Dimming Touch Switch
- Switch glows Blue

**#41323P** Dome Light with Touch Switch

### LED Traditional SS Dome Light



- 229 Lumens
- 12 VDC, 1.7 W
- New LED version
- Stainless Steel
- Prismatic plastic lens
- Surface Mount
- 150 ° Beam Angle

- Side mounted on/off switch. Illuminated by 20 SMD 2835 warm white (4000K) LED's (compares with a 20 Watt Halogen bulb)

**#41324P** LED 5-1/2" Dia. x 1-1/2" High


**#41325P** LED 6-3/4" Dia. x 1-5/8" High

## Surface Mount Lights

### LED 7" Oval Dome Light with Touch Switch

#### #41322


- 680 Effective Lumens
- 12/24 VDC
- 42 x 0.5 Watt 2835 LEDs
- Natural White (4500K)
- Plastic housing with high impact plastic lens
- Surface mount, 2 SS Screws Included
- IP67
- Three Stage Dimming Touch Switch
- Switch glows Blue

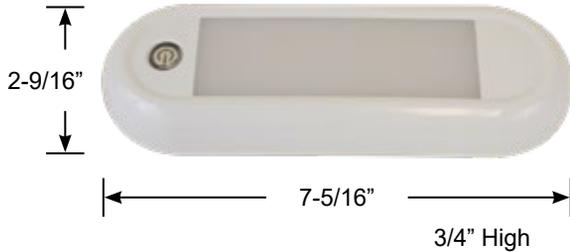

### LED 6" Rail Light with Motion Switch

#### #41465

- 195 Effective Lumens
- 12/24V
- 22 x 0.2 Watt 2835 LEDs
- Color White
- Aluminum housing with high impact plastic lens
- Surface mount, 2 SS Screws included
- IP67
- Motion Switch (Light stays on 35 seconds after last movement)

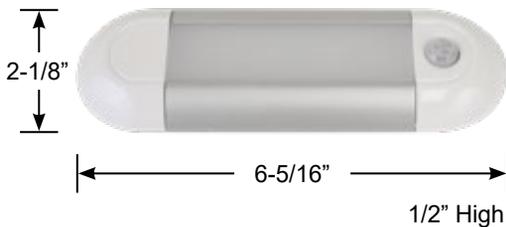


#### #41472P Natural White Bunk Light

- Lumens: 515
- 10-30 VDC, 10.8 Watt
- Surface Mount
- 54 x 2835 Natural White LEDs
- Touch Switch
- IP67
- Dimensions: 11-7/8" L x 2-1/4" W x 1/2" D



### LED 12" & 24" Rail Lights

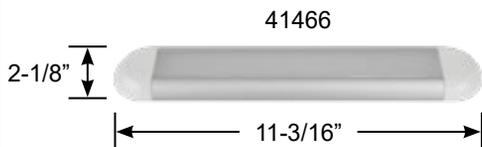

#### #41467 24"

- 820 Effective Lumens
- 118 x 0.2 Watt 2835 LEDs
- Other specifications the same as 12" rail light



#### #41466 12"

- 550 Effective Lumens
- 12/24 VDC
- 58 x 0.2 Watt 2835 LEDs
- Color White
- Aluminum housing with high impact plastic lens
- Surface mount, 2 SS Screws included
- IP67
- Without switch

## Surface Mount Lights


### #41364 LED Cabin Light with Switch

- 535 Lumen
- Dimmable when connected to an external dimming module
- 12/24 VDC, 9 Watt
- 32 x 0.5 Watt Samsung 5630 LEDs
- Warm White (3000K)
- Polycarbonate housing and diamond cut lens
- Surface Mount
- IP40 (for interior use)
- Dimensions: 13" L x 2-3/4" W x 7/8" H



### #41480 Warm White & Blue Bunk Light

- Lumens: 760 (White), 123 (Blue)
- 10-30 VDC, 7.6 Watt
- Surface Mount
- LEDs: 33 White, 30 Blue
- Touch Switch
- IP67
- Dimensions: 10" L x 1-3/4" W x 1/2" D

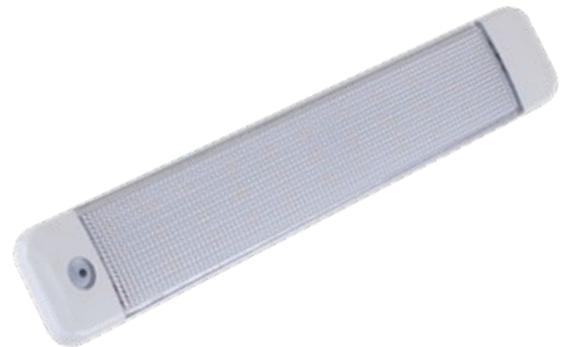

## LED 6" & 12" RGBW+ COLOR CHANGE RAIL LIGHT




Scandvik's New 6" and 12" RGBW+ Color Change LED Rail Light with class leading output, sealed weatherproof construction is a favorite amongst Boatbuilders. Intelligent circuitry allows color changing without specialized switches or controllers. Simple 2-wire connections with any on/off switch is all that is required to cycle from White to Blue to Red to Green. Switch off for more than 4 seconds resets the color to white. Light also has a dynamic color-change fade setting in the last sequence that allows the light to cycle through a range of colors on its own.

For surface mount or T-top and Bimini top applications. Includes rail mounting brackets for 3/4" to 1-1/2" diameters

- IP65
- 10-30VDC
- 9 PCS RGBW LEDs (6")
- 24 PCS RGBW LEDs (12")
- Cool White, Blue, Red, Green, +Dynamic Color Change Mode
- Lumens W:147, G:136, B:25, R:68
- Extruded Aluminum Body

#41761P 6" RGBW & Fade  
#41763P 12" RGBW & Fade

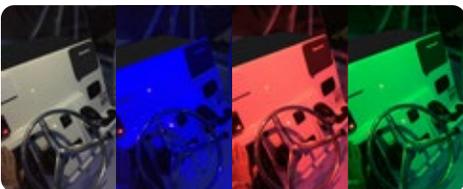

#41763P




#41181


Included Mounting Bracket allows mounting to aluminum t-top tubes



#41761P

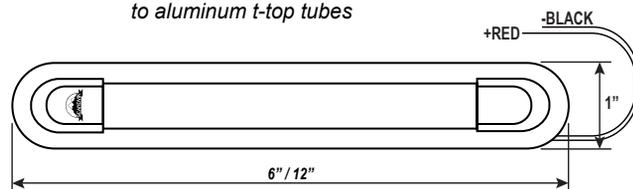

ø1 1/2"




Pipe mounting bracket for 3/4" to 1 1/2" diameters

## Cabin and Reading Lights



**#19052P** LED Polished Brass

- 154 Lumen
- 12/24 VDC, 3.1 Watt
- Adjustable swivel light
- On/off rocker switch
- 16 SMD 2835 Warm White (2900-3200K) LED
- 120° Beam Angle

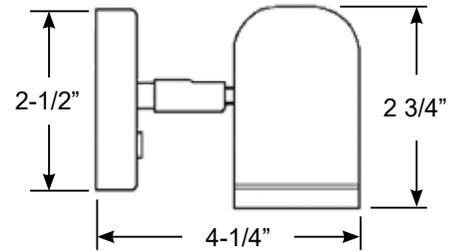


**#19053P** LED 304 Stainless Steel

Lighting



**#41365** LED Frosted Glass Shade

- 290 Lumen
- 12/24 VDC, 1.5 Watt
- Adjustable swivel light
- On/off rocker switch
- 304 Stainless Steel
- White frosted glass shade
- 0.12 A @ 12V, 0.06 A @ 24 V
- Warm White (2900-3200K) LED
- 340° Beam Angle

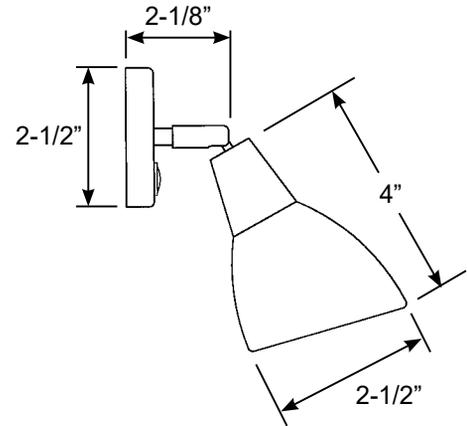


**#41330** Halogen Chrome

- 12 Volt - 10 Watt G4 Halogen bulb
- Adjustable swivel light
- Chrome plated brass
- On/off rocker switch




**#41366** LED Chrome

- 12/24 VDC
- Adjustable swivel light
- Chrome plated brass
- On/off rocker switch
- Dimmable

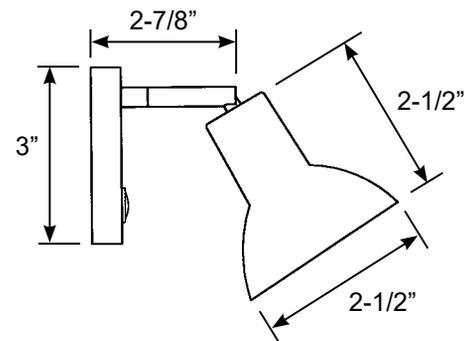


## Cabin and Reading Lights

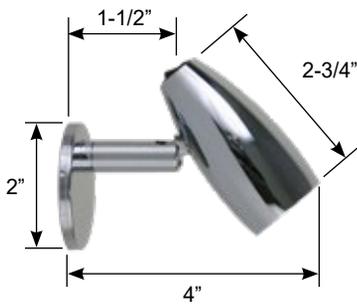

**#41396P** LED Micro Reading Light

- 120 Lumen
- Adjustable swivel light
- Chrome plated brass
- On/off rocker switch
- 12/24 VDC, 2.0 Watt
- 12 x 0.2 Watt LEDs
- Warm White (2,900-3,200K)
- Beam Angle 120°
- LED Lifetime: 50,000 hours

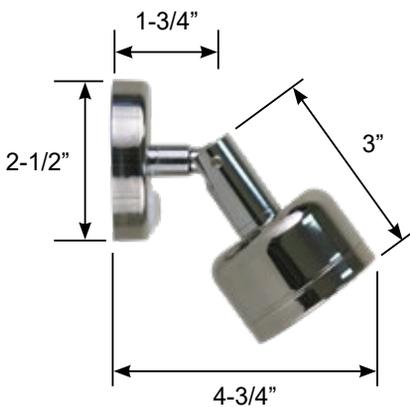


**#41397P** LED Allure Reading Light

- 140 - 160 Lumen
- Dimmable
- Adjustable swivel light
- 304 Stainless Steel
- On/off rocker switch
- 12/24 VDC, 3.1 Watt
- 1 x 3.0 Watt LED
- Warm White (2,850-3,200K)
- Beam Angle 110°
- LED Lifetime: 50,000 hours




## Engine Room / Utility Lights

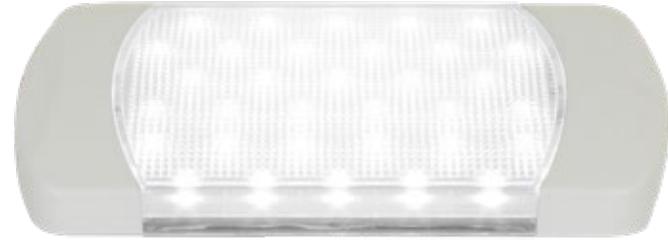

### #41590P E-330 LED Compact Engine Room Light

- 727 Lumen
- 12/24 V, 10 Watt
- 33 x 0.5 Watt 2835 LEDs
- Cool White (5700-6300K)
- Polycarbonate Lens with plastic housing
- Beam Angle: 120°
- Surface Mount (wire can exit from bottom or end of fixture)
- IP67

MARINE  
IGNITION  
PROTECTED

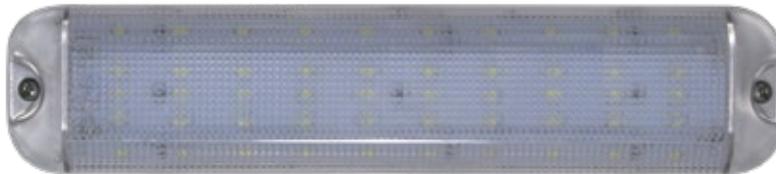

41389P



MARINE  
IGNITION  
PROTECTED




### #41388P E-360

- Lumen: 1,154  
12 V, 13.2 Watt  
LED Quantity: 36 (4 rows of 9 SMD2835 LEDs)

### #41389P E-500

- Lumen: 1,520  
12/24 V, 18 Watt  
LED Quantity: 50 (5 rows of 10 SMD2835 LEDs)

- Protection: IP65  
LED Type: SMD5630 Cool White (5,500K-6,300K)  
Beam Angle: 120°  
Surface Mount (hardware included)  
Wire can exit from bottom or end of fixture  
Dimensions: 13" L x 2-3/4" W x 1" H

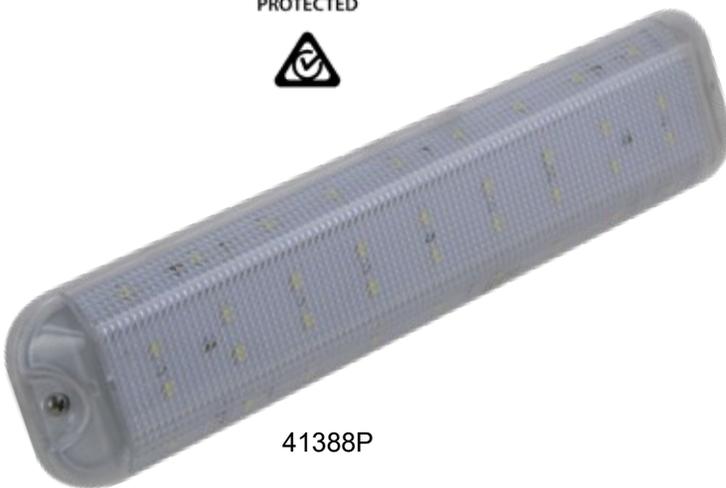

41388P

## Engine Room / Utility Lights



### #41593P E-1680 LED Engine Room / Utility Light

This super-bright, vibration resistant LED light meets the expectations of next generation vessels, refits or upgrades. The fixture can be powered by your DC battery system, AC generator/shore power or both. If connected to both, the PC board automatically switches to DC power, when AC power is lost. Meets the Requirements and Standards for SAE J1171. USCG. ABYC & NMMA. Includes trim ring for surface mount installation

168  
SUPER  
BRIGHT  
LED'S



- 3400 Lumen (similar to 2 x T8 fluorescent)
- Flush or Surface Mount
- Single or dual voltage
- 30 Watt
- 168 Super-Bright 2835 LEDs
- Cool White (6000K)
- Beam Angle: 120°
- IP67
- Stainless Steel mounting hardware included
- 3-Year Warranty

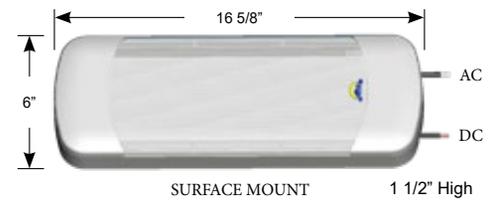

# Bracket Mount LED Spreader / Deck Lights

## Bracket Mount Spreader Light





Scandvik's LED Spreader Light is the perfect solution to illuminate your deck or cockpit. Featuring five, daylight white 3W LEDs providing 900 effective lumen output. A white Zytel® composite housing was designed specifically for the rigors of the marine environment. An adjustable stainless steel bracket mounting solution allows you to aim the light where it is needed most. Guaranteed against corrosion, discoloration and water intrusion. Three year Manufacturers Warranty.

- 900 Lumens
- 12/24 V, 12 Watt
- UV Resistant Polycarbonate housing
- Polycarbonate Lens
- IP67
- Comparable to a 120 Watt halogen bulb

**#41440P White**

**#41441P Black**



Lighting



## Compact Size LED Spreader Light



- 610 Lumens
- 12/24 VDC, 5 Watt
- 3 x 3W LEDs
- UV Resistant Polycarbonate housing
- Polycarbonate Lens
- IP67
- Comparable to a 75W halogen bulb


**#41445P White**

**#41446P Black**



- High Quality Composition Frames
- 2 x 5 Watt Cree 3535 LEDs
- Polycarbonate Lens
- UV Resistant
- 500 Lumen
- IP68

**#41435 Bracket Mount**




- High Quality Composition Frames
- 2 x 5 Watt Cree 3535 LEDs
- Hidden Mounting Screws
- Polycarbonate Lens
- UV Resistant
- 500 Lumen
- IP68

**#41436 Flush Mount White**


**#41437 Flush Mount Black**



Installation Video



## Flush Mount LED Spreader / Deck Lights



### FLUSH MOUNT 5x3 WATT

- 900 Lumens
- 12/24 V, 12 Watt
- Polycarbonate Frame
- Polycarbonate Lens
- UV Resistant
- Hidden Mounting Screws
- Cool white LED color (5,500 - 6,300K)
- Temperature of LED: less than 158° with 77° ambient temperature



### #41343 Flush Mount with White Trim


### #41356 Flush Mount with Black Trim

- Five 3 Watt Samsung 3535 LEDs
- Equivalent to 120 Watt Halogen bulbs
- LED Lifetime: 50,000 Hours
- LED Beam angle: 110°
- 0.8 Amp draw at 12 Volt
- IP67
- Fits previous model cutout
- Dimensions: 6" W x 2-1/2" H x 1-3/4" D
- Cutout: 4-1/2" W x 1-1/2" H

### #41201 White Trim Ring Only

### #41202 White Trim Ring Only

## Flush Mount 3x5 Watt

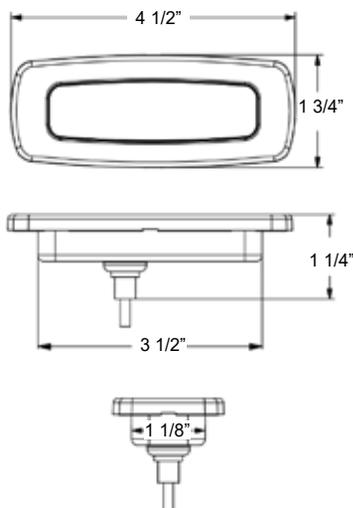


- 700 Lumens (equivalent to 100W halogen bulb)
- 12/24 Volt (10-30VDC), 6.0 Watt
- Flush Mount Spreader Light
- High Quality Composition Frame
- Polycarbonate Housing / UV Resistant
- Hidden Mounting Screws
- Daylight White LED (5500-6300K)
- 3 x 5 Watt Samsung 3535 LED's
- 125° Beam Angle
- 0.5 Amp Draw at 12 Volts
- IP68
- Dimensions: 4-1/2" L x 1-3/4" W x 1-1/4" D
- Cutout: 3-9/16" x 1-3/16"



### #41450P White

### #41451P Black

## Oval LED Courtesy Light with Blue Light



**Small Size Surface Mount 2-LED Light with Polished 304 Stainless Steel trim.** Suitable for interior or exterior installation. Stainless Steel mounting screws included.

- 5 Lumens
- 12 V - 0.4 W, 0.03 Amp
- IP67

### #41460 304 Stainless Steel Trim



# Cockpit Lights & Courtesy Lights



## Single Color Cockpit Light

- Surface Mount
- Polycarbonate housing and lens
- 5 x 0.5 W Warm White LED
- 128 Lumens
- 12 V - 2 Watt
- IP-67



#41371P LED Cockpit Light



## Single Color Cockpit Light

- Flush Mount
- Polycarbonate housing and lens
- 5 x 0.5 W Warm White LED
- 128 Lumens
- DC12V - 9 Watt
- IP-67




#41372P LED Cockpit Light



## Dual Color Cockpit Light

- Flush Mount
- Polycarbonate housing and lens
- Auto switches from White to Blue
- 5 x 0.5 W Two Color LED - Cool White and Blue
- Cool White: 141 Lumens / Blue: 32 Lumen
- DC10-30V - 2.4 Watt
- IP-67

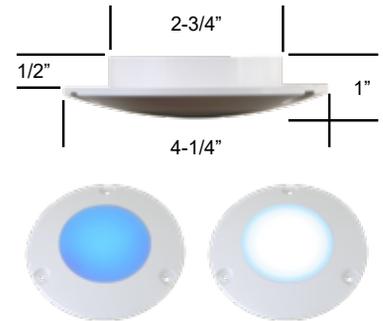


#41367P LED Cockpit Light



## H-5 COB LED

LED Courtesy Lights features a **316 Stainless Steel** snap on trim ring

- Surface Mounted
- 12 V - 1.2 Watt
- 1pc COB LED for a more unified output (No Dotting)
- Warm White: 66 Lumen / Blue: 16 Lumen
- IP67

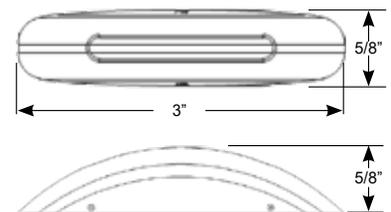

#41570P Warm White LED

#41571P Blue LED



Side Illumination




Down Illumination

## R-5 COB LED

LED Courtesy lights with polished **316 Stainless Steel** trim.

- 12 V - 0.4 W, 0.03 Amp
- 5 x TOP LEDs
- Surface Mounted
- IP67
- 2-5/8" W x 13/16" H x 1/2" D



#41381 Daylight White Side Illumination, 15 Lumen


#41382 Blue Side Illumination, 3.5 Lumen

#41383 Daylight White Down Illumination, 15 Lumen

#41384 Blue Down Illumination, 3.5 Lumen

# Task and Locker Lights

## O-5 COB LED



**LED Surface Mount Courtesy Light.** ABS housing with white or stainless steel snap on trim. 5 x 0.4 Watt white LEDs (4,500K) or 5 TOP blue LED's. LED beam angle is 120°. White is 15 lumens and blue is 2.8 lumens. 12 V, IP65. Dimensions 2-7/8" L x 1-1/2" W x 7/16" D.



- #41360 White LED with white trim
- #41339 Blue LED with white trim
- #41361 White LED with **316 Stainless Steel** trim
- #41362 Blue LED with **316 Stainless Steel** trim



## Surface Mount LED Courtesy/Locker Light

**Scandvik's LED Surface Mount Locker Light** is offered in a touch switch or motion sensing design. The Touch version has a blue led backlit touch switch for easy nighttime location. The motion sensor switch version is triggered by temperature and movement (both of which are necessary to trigger the light within 6'). Both Lights feature a **316 Stainless Steel** Bezel and are designed for wet locations. Ideal for Hatch, Locker and Closet illumination. Mounting Hardware included.

Dimensions with Stainless Steel Trim: 4 5/16"L x 1-1/16"W x 1/2"H (11/16" for Motion Sensor)


- 210 Lumen (Warm White 2900-3200K)
- 10-30VDC
- IP67

#41741P Locker Light with Touch Switch, **316 Stainless Steel** Trim.

#41740P Same as above without Stainless Steel Trim.

#41746P Locker Light with Motion-Sensor Switch, **316 Stainless Steel** Trim.



#41745P Same as above without Stainless Steel Trim



41741P



41746P

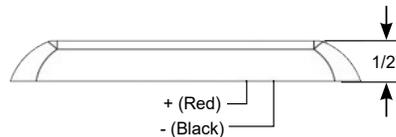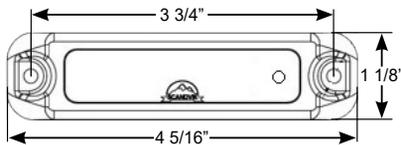

## Surface Mount LED Courtesy/Locker Light

- 12VDC, 4" 1.2W, 8" 3W
- Polycarbonate Housing
- 2-Wire Connection
- 0.2W 2835 LED, 4" x 6, 8" x 15
- Daylight White 4500K
- Use with or without Included gasket
- Wires exit light in the middle of the back. Gasket has channel on back to route wires to the end of the light if needed.
- IP67
- Dimensions: 4" or 8" long (1/4" longer with gasket) x 5/8" wide (3/4" with gasket) x 1/2" high (5/8" with gasket)

#41640 4" Daylight White 73 Lumens


#41641 4" Blue 14 Lumens

#41643 4" RGBW Lumens W:43 G:27 B:7 R:7

#41644 8" Daylight White 176 Lumens

#41645 8" Blue 23 Lumens

#41647 8" RGBW Lumens W:107 G:67 B:17 R:17




# SCAN-STRIP 4 - Color RGBW LED




16" RGBW SCAN-STRIP (30 LED)



8" RGBW SCAN-STRIP (15 LED)




- RGBW LEDs
- Colors Daylight White (4000-4500K), Blue, Red, Green
- Lifespan 30,000 + Hours
- 120° Beam Angle
- 12/24 V (10-30VDC)
- Watts 8" = 1.2
- Watts 16" = 2.4
- Watts 20" = 3.1
- Lumens 8" White = 94
- Lumens 16" White = 180
- Lumens 20" White = 234
- IP65
- Ideal for under gunwale lighting
- SS Mounting Screws Included
- 8" (8-7/8" L x 7/8" W x 1/2" H)
- 16" (16" L x 7/8" W x 1/2" H)
- 20" (20" L x 7/8" W x 1/2" H)

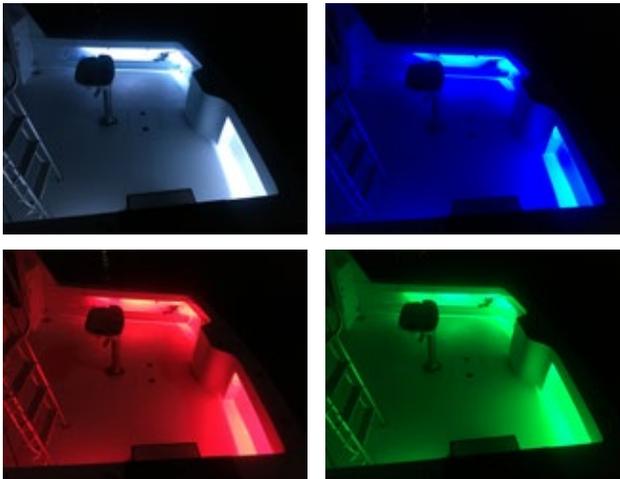


Scan-Strip 4-Color RGBW LED builds on the popularity of our original single color Scan-Strip LED. Simple 2-wire connections with any on/off switch is all that is required to cycle from White to Blue to Red to Green. Switch off for more than 4 seconds resets the color to white.


**#41650**

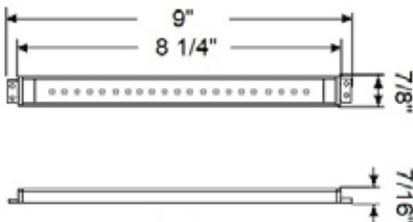

**#41651**

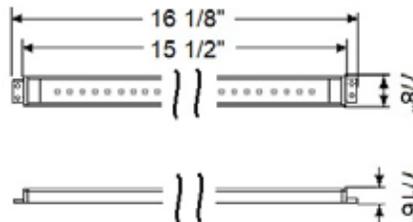

**#41652**

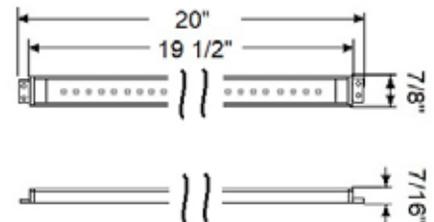

## BULK PACKAGING

- #41650** 8" Scan-Strip 15 RGBW LEDs
- #41651** 16" Scan-Strip 30 RGBW LEDs
- #41652** 20" Scan-Strip 39 RGBW LEDs

## RETAIL PACKAGING

- #41650P**
- #41651P**
- #41652P**

# SCAN-STRIP LED




4" SCAN-STRIP (5 LED)

8" SCAN-STRIP (17 LED)

16" SCAN-STRIP (34 LED)



- NEW Super Bright 2835 LEDs
- Available in Cool White, Blue, Red and Green
- Lifespan 30,000 + Hours
- 120° Beam Angle
- 12 Volt
- IP65 Can be installed in engine rooms and exterior locations
- Ideal for under gunwale lighting
- SS Mounting Screws Included
- 4" (4" L x 7/8" W x 1/2" H)
- 8" (9" L x 7/8" W x 1/2" H)
- 16" (16-1/8" L x 7/8" W x 1/2" H)
- 36" (36" L x 7/8" W x 1/2" H)




Middle support bracket

36" SCAN-STRIP (85 LED)


Lighting

Scan-Strip LED lighting is a quality product for marine or RV use. Mount them almost anywhere, under gunwales, in storage lockers, coolers, fish boxes, engine rooms. Use below deck in cabin areas for general lighting or courtesy lights.


#41354




#41346

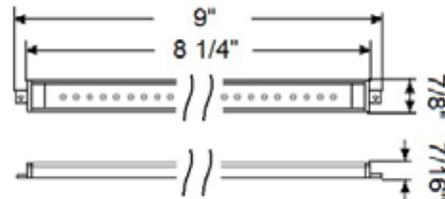

#41350

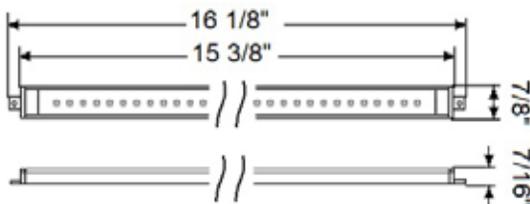

#41358

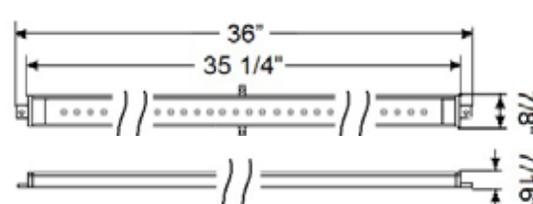

## BULK PACKAGING

## RETAIL PACKAGING

- |        |   |
|--------|---|
| #41354 | 4" Scan-Strip 5 White LEDs (56 Lumens)    |
| #41357 | 4" Scan-Strip 5 Blue LEDs (16 Lumens)     |
| #41346 | 8" Scan-Strip 17 White LEDs (256 Lumens)  |
| #41347 | 8" Scan-Strip 17 Blue LEDs (54 Lumens)    |
| #41350 | 16" Scan-Strip 34 White LEDs (400 Lumens) |
| #41351 | 16" Scan-Strip 34 Blue LEDs (116 Lumens)  |
| #41358 | 36" Scan-Strip 85 White LEDs (957 Lumens) |
| #41359 | 36" Scan-Strip 85 Blue LEDs (270 Lumens)  |

- |         |  |
|---------|--|
| #41354P |  |
| #41357P |  |
| #41346P |  |
| #41347P |  |
| #41350P |  |
| #41351P |  |
| #41358P |  |
| #41359P |  |



images are not to scale

# LED FLEX-STRIPS

## 12mm Wide Single



Thicker durable strip with no adhesive backing. 30 or 60 LED's per meter. 5-meter (16') reels wired at both ends, can be cut to custom lengths. 24 silicone mounting clips and 2 end caps included. \*Dimmable with optional controller.


Part Number	Color	LED's per meter	Length	Width	Voltage	Dimmable	Protection
<b>41510</b>	Warm White	60	16' (5-meter)	12mm	12 V	Yes*	IP68
<b>41511</b>	Cool White	60	16' (5-meter)	12mm	12 V	Yes*	IP68
<b>41520</b>	Red	30	16' (5-meter)	12mm	12 V	Yes*	IP68
<b>41521</b>	Blue	30	16' (5-meter)	12mm	12 V	Yes*	IP68
<b>41522</b>	Green	30	16' (5-meter)	12mm	12 V	Yes*	IP68
<b>41523</b>	Blue	60	16' (5-meter)	12mm	12 V	Yes*	IP68

## 14mm Wide Dual Color

### TWO COLORS IN ONE STRIP!

Strips can be cut on the cut-marks and sealed with silicone end caps and installed with silicone clips included. Strips can be wired together to make longer runs.

- Wired on both ends
- IP68
- SMD5050 LEDs
- 60 LED/meter
- Blue/Red or Cool White or both together
- 14mm wide
- Requires a double throw (on/off/on) switch



Short Length Kit  
Retail Package



Part Number	Color	Length	Width	Voltage	Dimmable	Protection
<b>41524</b>	Blue-White	16' (5-meter)	14mm	12 V	Yes*	IP68
<b>41525</b>	Red-White	16' (5-meter)	14mm	12 V	Yes*	IP68
<b>41514</b>	Blue-White	21"	14mm	12 V	Yes*	IP68
<b>41515</b>	Red-White	21"	14mm	12 V	Yes*	IP68
<b>41516</b>	Blue-White	48"	14mm	12 V	Yes*	IP68
<b>41517</b>	Red-White	48"	14mm	12 V	Yes*	IP68

# U-12 Underwater LED Light



- #41430P White
- #41431P Blue
- #41432P Green



Installation Video



Thru-Hull Surface Mount  
Requires 3/8" (10mm) Hole

- Copolyester (PCTG) Lens Housing with **316 Stainless Steel** Trim
- 12 X SMD2835 (white & blue) Super Bright LEDs or 5mm High Flux green LEDs
- Lumens: 180 (White), 50 (Blue), 139 (Green)
- IP68
- 12 V
- White: 2.3 Watt, 0.2 Amp
- 120° Beam Angle provides intense illumination
- Mount with wire thru-hull or wire outside hull using included stand off mounting block
- 5' Cable / SS Screws Included
- Dimensions Thru-Hull Surface Mount:  
3-3/8" W x 1-5/8" H x 7/8" D
- Dimensions Standoff Surface Mount:  
3-3/8" W x 1-5/8" H x 1-1/4" D



Standoff Block  
(Included)







Standoff Surface Mount  
(Does not require hole through transom)

Lighting

## #41599 LED RGBW 4-Color Controller

- Works with any RGBW LED Material
- Cycles through: White/Blue/Red/Green with any switch
- 4-Second Reset to White
- 12/24 V - 60 Watt
- IP67

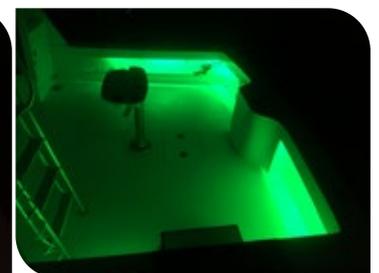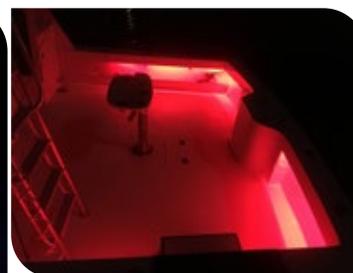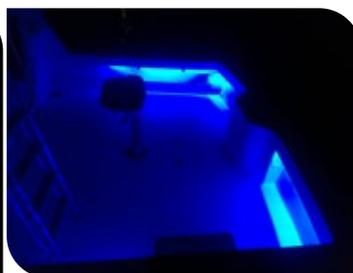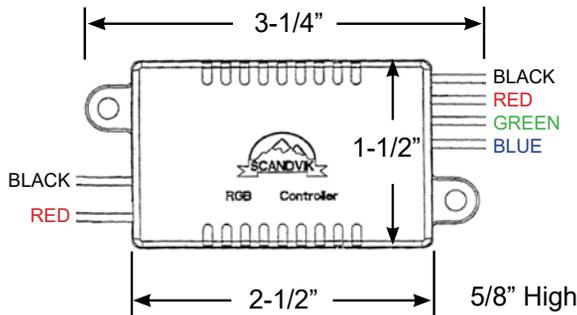



## Dimmers



### Wall Mount 12V Dimmer with IR Remote

- 12/24 VDC
- External Dimensions: L 34 1/2" x W 34 1/2" x H 1 5/8"
- Max Current: 16 Amp
- Working Temperature: -20-60 C°

**#41607** Wall Mount 12V Dimmer with IR Remote

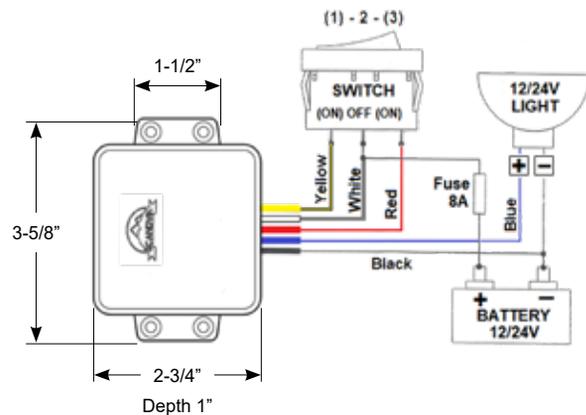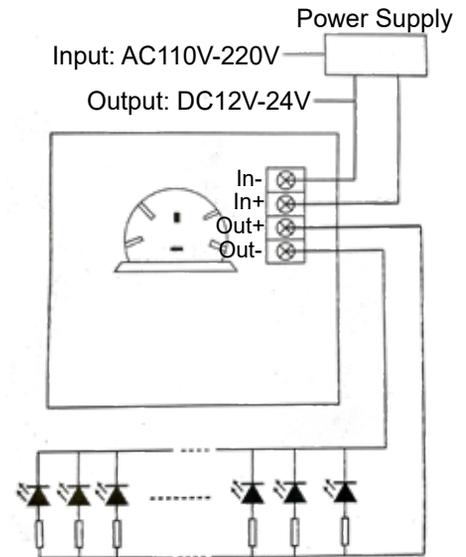

The **Tortuga Dimmer** is designed to easily adjust the interior or exterior light level from 0-100% output. Touch the “up” button to turn light on and touch the “down” button to turn light off.

Press and hold either up or down, on the included switch, to increase or decrease the light output level to your likeness. Release at any point to maintain the current brightness.

If you are leaving the boat, the Tortuga features an exit mode. Push the “down” button two times within 1.5 seconds, the light will flash twice, and turn off after 1 minute.

- IP66
- 10-30VDC
- Rated for 8A, 12V or 24V
- Includes Switch
- Die Cast Aluminum Housing
- Pulse Width Modulated to will work with LED, Incandescent or Halogen Lights

**#41598P** Tortuga Dimmer

## Power Supplies



**#41610** 50 Watt

- Input: AC 100-255V, 0.4A
- Output: DC 12V, 4.16A
- Shipping Weight: 2 Lbs



**#41611** 80 Watt

- Input: AC 110V, 1.0A
- Output: DC 12V, 6.7A
- Shipping Weight: 2 Lbs



**#41612** 150 Watt


- Input: AC 100V, 1.6A
- Output: DC 12V, 12.5A
- Shipping Weight: 3 Lbs



**#41613** 250 Watt

- Input: AC 110 - 250V, 1.2A
- Output: DC 12V, 20A
- Shipping Weight: 3 Lbs

## RGB Accessories

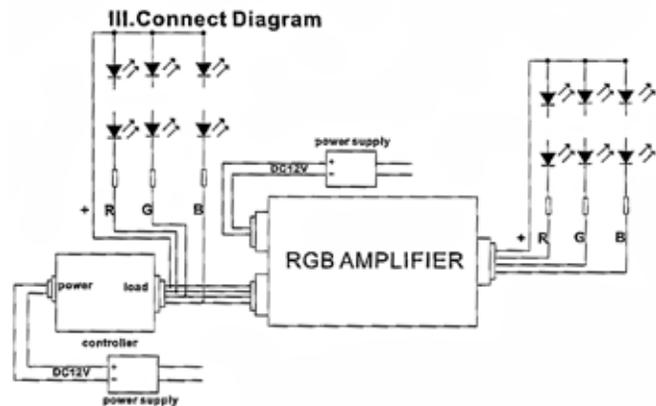

- Power: 12V - 4A per channel
- Supply Voltage: 12V - 24V DC
- Input & Output: RGBW channels
- Working Temperature: -4° - 140° F (-20° - 60° C)
- Dimensions: 95mm L x 52mm W x 30mm H
- Output: Three CMOS open - drain output
- Connecting Mode: Common anode
- Max output current: 4 A each color
- Weight: 110g

**#41607** Weather Proof RGBW Power Amplifier

# LED Replacement Bulbs

## YOU HAVE

## LED SOLUTION

## YOU HAVE

## LED SOLUTION

**MR16 LED**  
**41008P** Warm White  
**41009P** Cool White  
 Lumen: 290 WW  
 Lumen: 320 CW

Volts: 12/24 VDC and 12 VAC  
 Amps: 0.42 @12V  
 0.21 @24V  
 Watts: 5  
 Beam Angle: 120°  
 Dimmable: Yes


**GU10 LED**  
**41114P** Warm White  
**41115P** Cool White  
 Lumen: 290 WW  
 Lumen: 320 CW

Volts: 120VAC  
 Amps: 0.1  
 Watts: 5  
 Beam Angle: 120°  
 Dimmable: Yes








**G4 Wafer Side-Pin DUAL Color**  
 Volts: 12/24 VDC  
 Lumen: 150 WW, 180 CW  
 Amps: 0.14 @ 12V (White)  
 Watts: 1.7 White, 0.5 Color  
 Dimmable: Yes  
**41050P** Warm White / Blue  
**41051P** Warm White / Red  
**41052P** Cool White / Blue  
**41053P** Cool / Red


**G4 Wafer Back-Pin**  
 Volts: 12/24 VDC  
 Lumen: 120 WW, 140 CW  
 Amps: 0.12 @ 12V, 0.06 @24V  
 Watts: 1.5  
 Beam Angle: 120°  
 Dimmable: Yes  
**41000P** Warm White  
**41001P** Cool White


**G4 Tower**  
 Volts: 12/24 VDC  
 Lumen: 220 WW, 260 CW  
 Amps: 0.21 @ 12V  
 Watts: 2.5  
 Beam Angle: 270°  
 Dimmable: Yes  
**41070P** Warm White  
**41071P** Cool White

**G4 Wafer Back-Pin**  
 Volts: 12/24 VDC  
 Lumen: 170 WW, 190 CW  
 Amps: 0.17 @ 12V, Watts: 2.0  
 Beam Angle: 120°  
 Dimmable: Yes  
**41010P** Warm White  
**41011P** Cool White

**G4 Halogen Look-Alike LED:** 1 COB (WW,CW)  
 Volts: 12/24 VDC  
 Lumen: 200 WW 3000K, 210 CW 6000K  
 Amps: 0.12 @ 12V  
 Watts: 1.5  
 Beam Angle: 320°  
 Dimmable: No  
**41072P** Warm White  
**41073P** Cool White  
**41038P** Blue 24 SMD3014 Beam Angle: 330°

**G4 Wafer Side-Pin**  
 Volts: 12/24 VDC  
 Lumen: 120 WW, 140 CW  
 Amps: 0.12 @ 12V  
 Watts: 1.5 White, 1.0 Color  
**41020P** Warm White  
**41021P** Cool White  
**41022P** Blue  
**41023P** Red




**Mini-Bayonet, Mini-Tower LED:** 24 SMD3014  
 Parallel Pins - Single Contact  
 Volts: 12/24 VDC  
 Base: BA9s  
 Lumen: 120  
 Amps: 0.12 @ 12V  
 Watts: 1.5 Beam Angle: 330°  
 Dimmable: No  
**41075P** Warm White 3000K




**G4 Wafer Side-Pin**  
 Volts: 12/24 VDC  
 Lumen: 170 WW, 190 CW  
 Amps: 0.17 @ 12V  
 Watts: 2.0  
**41030P** Warm White  
**41031P** Cool White  
**41032P** Blue  
**41033P** Red




**Bayonet Mini-Tower**  
 Volts: 12/24 VDC  
 Base: BA15s  
 Lumen: 170  
 Amps: 0.16 @ 12V  
 Watts: 1.9  
 Beam Angle: 270°  
 Dimmable: No  
**41034P** Warm White




**G4 Wafer Side-Pin**  
 Volts: 12/24 VDC  
 Lumen: 270 WW, 310 CW  
 Amps: 0.25 @ 12V  
 Watts: 3.0  
 Beam Angle: 120°  
 Dimmable: Yes  
**41040P** Warm White  
**41041P** Cool White





**Bayonet Tower LED:** SMD  
 Parallel Pins - Dual Contacts  
 Volts: 12/24 VDC  
 Base: BA15d  
 Lumen: 220 WW 3000K, 220 CW 6000K  
 Amps: 0.21 @ 12V  
 Watts: 2.5 Beam Angle: 350°  
 Dimmable: No  
**41080P** Warm White  
**41081P** Cool White




**Bayonet Tower LED:** SMD  
 Offset Pins - Dual Contacts  
 Volts: 12/24 VDC  
 Base: BAY15d  
 Lumen: 220 WW 3000K, 220 CW 6000K  
 Amps: 0.21 @ 12V  
 Watts: 2.5 Beam Angle: 350°  
 Dimmable: No  
**41082P** Warm White  
**41083P** Cool White




**Wedge Base LED:** 1 COB (WW)  
 Volts: 12/24 VDC  
 Base: T10 Wedge  
 Lumen: 200  
 Amps: 0.13 @ 12V Beam Angle: 320°  
 Watts: 1.5  
 Dimmable: No  
**41097P** Warm White 3000K  
**41039P** Blue 24 SMD3014 Beam Angle: 330° **NEW**

Lighting

# LED Replacement Bulbs

## YOU HAVE

## LED SOLUTION

## YOU HAVE

## LED SOLUTION

**Bayonet Compact-Tower LED: SMD Parallel Pins - Single Contact**  
**Volts:** 12/24 VDC  
**Base:** BA15s  
**Lumen:** 220 WW 3000K, 220 CW 6000K  
**Amps:** 0.21 @ 12V  
**Watts:** 2.5 Beam Angle: 350°  
**Dimmable:** No  
**41084P** Warm White  
**41085P** Cool White

**Festoon 360°**  
**Base:** 30mm Festoon  
**Lumen:** 115  
**Volts:** **12 VDC ONLY**  
**Amps:** 0.1  
**Watts:** 1.2  
**Beam Angle:** 360°  
**Dimmable:** No  
**41035P** Warm White

**Bayonet Base Wafer Parallel Pins - Dual Contacts**  
**Volts:** 12/24 VDC  
**Base:** BA15d  
**Lumen:** 55 WW, 65 CW  
**Amps:** 0.06 @ 12V  
**Watts:** 0.7  
**Dimmable:** No  
**41086P** Warm White  
**41087P** Cool White

**Festoon Wafer**  
**Volts:** 12/24 VDC  
**Base:** 31mm Festoon  
**Lumen:** 45 WW, 65 CW  
**Amps:** 0.06 @ 12V  
**Watts:** 0.7  
**Dimmable:** No  
**41100P** Warm White  
**41101P** Cool White

**Bayonet Base Wafer Offset Pins - Dual Contacts**  
**Volts:** 12/24 VDC  
**Base:** BAY15d  
**Lumen:** 55 WW, 65 CW  
**Amps:** 0.06 @ 12V  
**Watts:** 0.7  
**Dimmable:** No  
**41088P** Warm White  
**41089P** Cool White

**Festoon Wafer 37/42mm**  
**Volts:** 12/24 VDC  
**Base:** 37mm and 42mm Festoon  
**Lumen:** 75 WW, 90 CW  
**Amps:** 0.10 @ 12V, Watts: 1.2  
**Dimmable:** No  
**41102P** 37mm Warm White  
**41103P** 37mm Cool White  
**41104P** 42mm Warm White  
**41105P** 42mm Cool White

**Bayonet Base Mini-Tower**  
**Volts:** 12/24 VDC  
**Base:** BA15d  
**Lumen:** 170  
**Amps:** 0.16 @ 12V  
**Watts:** 1.9  
**Beam Angle:** 270°  
**Dimmable:** No  
**41090P** Warm White

**Festoon Wafer**  
**Volts:** 12/24 VDC  
**Base:** 42mm Festoon  
**Lumen:** 140 WW, 160 CW  
**Amps:** 0.17 @ 12V  
**Watts:** 2.0  
**Dimmable:** No  
**41106P** Warm White  
**41107P** Cool White

**Wedge Base Tower**  
**Volts:** 12/24 VDC  
**Base:** T10 Wedge  
**Lumen:** 220  
**Amps:** 0.21 @ 12V  
**Watts:** 2.5  
**Beam Angle:** 270°  
**Dimmable:** Yes  
**41092P** Warm White

**360° Nav. Festoon**  
**Volts:** 12/24 VDC  
**Base:** 42mm Festoon  
**Lumen:** 175 WW, 210 CW  
**Amps:** 0.21 @ 12V  
**Watts:** 2.5  
**Dimmable:** Yes  
**41110P** Warm White  
**41111P** Cool White

**Wedge Base Mini-Tower**  
**Volts:** 12 VDC ONLY  
**Base:** T10 Wedge  
**Lumen:** 75  
**Amps:** 0.06  
**Watts:** 0.8  
**Dimmable:** No  
**41095P** Warm White

**360° Nav. Barrel**  
**Volts:** 12/24 VDC  
**Base:** 43mm Barrel  
**Lumen:** 175 WW, 210 CW  
**Amps:** 0.21 @ 12V  
**Watts:** 2.5  
**Dimmable:** Yes  
**41112P** Warm White  
**41113P** Cool White

**A15 Style Bulb**  
**Volts:** 12/24 VDC  
**Base:** E27  
**Lumen:** 270  
**Amps:** 0.25 @ 12V  
**Watts:** 3.0  
**Beam Angle:** 150°  
**Dimmable:** No  
**41036P** Warm White

**A19 Style Bulb**  
**Volts:** 12/24 VDC  
**Base:** E27  
**Lumen:** 450  
**Amps:** 0.46 @ 12V  
**Watts:** 5.5  
**Beam Angle:** 120°  
**Dimmable:** No  
**41037P** Warm White

**G4 Base Adapters**

**BA15d to G4**  
 Swivels up to 120°  
**41120P**

**BA15s to G4**  
 Swivels up to 120°  
**41121P**

**E27 to G4**  
 Standard Household Edison Socket  
**41122P**

# Retail LED Replacement Bulb/Strip Displays

#41140 Small Display Bulbs/Strips

#41144 Small Display Bulbs Only

Overall Dimensions: 30"H x 11"W x 10"D

Lighting



41140 Qty.	41144 Qty.	SKU	Description
	1	41000P	G4 Back-Pin Wafer 9 LEDs WW
1	1	41010P	G4 Back-Pin Wafer 12 LEDs WW
1	1	41020P	G4 Side-Pin Wafer 9 LEDs WW
1	1	41030P	G4 Side-Pin Wafer 12 LEDs WW
1	1	41032P	G4 Side-Pin Wafer 10 LEDs BLUE
1		41033P	G4 Side-Pin Wafer 10 LEDs RED
1	1	41040P	G4 Side-Pin Wafer 21 LEDs WW
	1	41052P	G4 Side-Pin Wafer 12/3 LEDs COOL WHITE/BLUE
1	1	41070P	G4 Bottom-Pin Compact Tower 18 LEDs WW
1	1	41072P	G4 Bottom-Pin LED WW
	1	41075P	BA9s Mini Tower 5 LEDs WW
	1	41080P	BA15d Tower 18 LEDs WW
	1	41082P	BAY15d Tower 18 LEDs WW
	1	41084P	BA15s Tower 18 LEDs WW
	1	41086P	BA15d Wafer 4 LEDs WW
	1	41090P	BA15d Mini Tower 8 LEDs WW
	1	41095P	T10 Wedge Mini Tower 5 LEDs WW
1	1	41097P	T10 Wedge LED Optic Lens WW
	1	41100P	31mm Festoon 4 LEDs WW
	1	41102P	37mm Festoon 6 LEDs WW
	1	41104P	42mm Festoon 6 LEDs WW
1	1	41106P	42mm Festoon 9 LEDs WW
1	1	41120P	Adapter: BA15d to G4
1	1	41121P	Adapter: BA15s to G4
	1	41122P	Adapter: E27 to G4
1		41346P	8" Scan-Strip WHITE
1		41347P	8" Scan-Strip BLUE
1		41514P	21" DUAL Color COOL WHITE/BLUE
1		41515P	21" DUAL Color COOL WHITE/RED



# Retail LED Replacement Bulb/Strip Displays

- #41141** Large Display Bulbs/Strips
- #41142** Full Large Display Bulbs/Strips
- #41145** Large Display Bulbs Only
- #41146** Full Large Display Bulbs Only

Overall Dimensions: 32"H x 14"W x 10"D

41141	41142	41145	41146	SKU	Description
2	4	4	8	41000P	G4 Back-Pin Wafer 9 LEDs WW
2	2	4	6	41008P	MR16 5 Watt LEDs WW
2	4	4	8	41010P	G4 Back-Pin Wafer 12 LEDs WW
2	5	4	10	41020P	G4 Side-Pin Wafer 9 LEDs WW
4	10	4	10	41030P	G4 Side-Pin Wafer 12 LEDs WW
2	5	2	5	41032P	G4 Side-Pin Wafer 10 LEDs BLUE
2	5	2	5	41033P	G4 Side-Pin Wafer 10 LEDs RED
4	10	4	10	41040P	G4 Side-Pin Wafer 21 LEDs WW
2	5	2	5	41052P	G4 Side-Pin Wafer 12/3 LEDs COOL WHITE/BLUE
2	3	2	4	41070P	G4 Bottom-Pin Compact Tower 18 LEDs WW
2	5	4	10	41072P	G4 Bottom-Pin LED WW
2	5	2	5	41075P	BA9s Mini Tower 5 LEDs WW
2	3	2	4	41080P	BA15d Tower 18 LEDs WW
2	3	2	4	41082P	BAY15d Tower 18 LEDs WW
2	3	2	4	41084P	BA15s Tower 18 LEDs WW
		2	5	41086P	BA15d Wafer 4 LEDs WW
		2	5	41088P	BAY15d Wafer 4 LEDs WW
2	5	4	10	41090P	BA15d Mini Tower 8 LEDs WW
2	3	2	4	41092P	T10 Wedge Compact Tower 18 LEDs WW
2	5	2	5	41095P	T10 Wedge Tower 5 LEDs WW
2	5	2	5	41097P	T10 Wedge LED Optic Lens WW
		4	10	41100P	31mm Festoon 4 LEDs WW
		2	5	41102P	37mm Festoon 6 LEDs WW
		2	5	41104P	42mm Festoon 6 LEDs WW
2	5	4	10	41106P	42mm Festoon 9 LEDs WW
4	10	4	10	41120P	Adapter: BA15d to G4
2	5	2	5	41121P	Adapter: BA15s to G4
2	3	2	4	41122P	Adapter: E27 to G4
2	4			41346P	8" Scan-Strip WHITE
2	4			41347P	8" Scan-Strip BLUE
2	4			41350P	16" Scan-Strip WHITE
2	4			41351P	16" Scan-Strip BLUE



**#13001**  
23" x 17" Padded counter mat displaying the LED light bulb replacement program. Both original incandescent and replacement LED bulbs are displayed in actual size.

Lighting



## PROLITE Series



**Dolphin Chargers** are known as a yacht quality product that is professionally designed and manufactured in Europe with the latest components to be more efficient and reliable than the competition. In 2019 Dolphin set out to create this line of small water resistant chargers with the same philosophy for the outboard and gasoline boat market.



- **Automatically senses and distributes 100% of available charging amps to any one bank or combination of all banks**
- 40% smaller and 50% lighter than most competitors
- Includes 6' AC and DC cables and fusing
- 15 amp 2 outputs / 25 amp 3 outputs
- IP 65 Water Resistant
- ISO certified 8846 for use in gasoline boats
- Works with any battery technology on the market
- Will charge from 0 VDC
- Bluetooth Interface
- Simple installation
- 92% Super Efficient

The **NEW PROLITE** 12v 15 Amp and 25 Amp chargers are smaller, lighter and more efficient than the competition and boast the latest in connectivity with standard **Bluetooth** interface. The **Dolphin Connect App** (iOS and Android) will allow you to monitor and control your charger from your mobile device!

SKU#	#99215	#99225
	12V - 15A	12V - 25A
<b>Input</b>		
Input Voltage	115V +/- 10%	115V/230V +/- 10%
Frequency	50/60 Hz +/- 10%	
Cos	> 0.5	> 0.9
Efficiency	> 90%	
Max. Current 115V/230V	4A	4A/2A
<b>Output</b>		
Number of outputs	2	3
Max. Current	15 Amp +/- 5%	25 Amp +/- 5%
Number of charging curves	Open lead acid / Lead calcium / AGM-GEL / LifeSo4 + BMS	
Charging curve	IUUo	
Voltage share	+/- 2%	
Ripple	< 1% (BW < 20MHz)	
<b>Protection</b>		
	Output current limited / Output short circuit / Overload output voltage / Reverse polarity / Over temperature	
<b>General</b>		
Display	Tricolor LED	
Control	Front push-button switch or via Dolphin Connection App	
Operating temperature	14° F to 131° F (automatic derating)	
Storage temperature	- 4° to 158° F	
Humidity	10% to 90%	
IP Rating	IP65	
Ventilation	Natural Convection	
Safety	EN 60335-1, EN 60335-2-29, ISO 8846, SAE J1171, UL 1236	
EMC	EN 55014-1, EN 55014-2	
Housing	Anodized extruded aluminium	
Mounting	Wall-mounted 2 x #8 Screws	
Dimensions	5.59" x 2.83" x 7.65"	5.59" x 2.83" x 9.61"
Weight	3.1 lbs.	3.8 lbs
AC & DC Cord length	6 feet	
AC Connection	3-wire, AWG 19 cable with NEMA 5-15 plug for U.S.	
Battery Connection	Pre-wired 5/16" Ring terminals with AWG 10 cables	Pre-wired 5/16" Ring terminals with AWG 6 cables

# Dolphin

premium

## PLUG AND PLAY BATTERY CHARGER



12V-40A  
24V-20A

12V-60A  
24V-30A



- New robust and compact casing
- 3 Completely isolated battery outputs
- Easy wiring and connections thanks to the Winsta (Wago) and Phoenix contact connectors
- Digital management with up to date micro controller
- 4 charging programs including one for lithium-ion-iron-phosphate with integrated BMS
- Full power at temperatures up to 120° F
- Automatic weekly equalisation for all charging programs
- Automatic 115/230V switch over
- Night mode: silent - without fan (12V-40A & 24V-20A only)
- Touchview Controller connection (12V-60A & 24V-30A only)
- Conformal coating of PCB to prolong the life of the battery charger



SKU#	#99030	#99050	#99040	#99041
	12V		24V	
	40A	60A	20A	30A
<b>Input</b>				
Input Voltage	115V/230V (+/-15%) Automatic Switch over			
Frequency	50Hz/60Hz (+/-10%)			
Cos	0.9			
Efficiency	80%			
Max. Current 115V/230V	7A/3.5A	10A/5A	7A/3.5A	10A/5A
Fuse	T10A 250V	T16A 250V	T10A 250V	T16A 250V
<b>Output</b>				
Number of outputs	3 isolated outputs			
Number of charging curves	4 programs, position selected by dip switch			
Charging curve	IUUo + weekly automatic equalization	IUUo	IUUo + weekly automatic equalization	IUUo
Weekly equalization	Automatic	N/A	Automatic	N/A
Voltage share	+/-2%			
Ripple	< 1% pp (BW < 20MHz)			
Fuse (automotive mini)	2 x F25A 32V	3 x F25A 32V	2 x F15A 32V	3 x F15A 32V
<b>Protection</b>				
	In case of output overload, Excessive internal temperature Charging voltage too high, Reverse battery polarity (fuse)			
<b>General</b>				
Display	Tricolor LED			
Night/Silent mode	By button	N/A	By button	N/A
Operating temperature	14° F to 122° F			
Storage temperature	- 4° to 158° F			
Humidity	10% to 90% (without condensation)			
Ventilation	Forced fan cooling			
Safety	EN 60335-2-29 (2002)			
Housing	Powder coated aluminum			
Mounting	2 x #10 Screws	4 x #10 Screws	2 x #10 Screws	4 x #10 Screws
Dimensions	4-3/4" W x 13-7/8" H x 3-3/4" D	10-3/4" W x 9-1/2" H x 4-1/4" D	4-3/4" W x 13-7/8" H x 3-3/4" D	10-3/4" W x 9-1/2" H x 4-1/4" D
Weight	4-1/4 lbs.	6-1/2 lbs.	4-1/4 lbs.	6-1/2 lbs.
AC Connection	20A 230V, 14 AWG max WINSTA - WAGO 770.813/G11-000			
DC Connection	10 AWG max	4 AWG max	10 AWG max	4 AWG max
CAN BUS	No	Yes	No	Yes

# Dolphin<sup>®</sup> charger



NEW

12V 24V

60A → 100A

ISO 8846



NEW

## PRO Evo3 Series

Scandvik is proud to introduce the Dolphin PRO Evo3. This new range of Marine Battery Chargers is the result of the latest technological advancements in the world of power electronics. By comparison to the Dolphin Pro Chargers, an additional DC output has been added while reducing the overall dimensions by 16% (12v/90a, 24v/40a, 24v/60a) and 30% (24v/100a). Not only are they more compact but also 30-60% lighter (9 lbs.) offering the highest power to space ratio on the market!

With 4 independent isolated DC outputs and NMEA 2000 communication the Pro Evo3 meets the demands of today's leading boat builders and modern electrical systems.

- **Ultra-compact and lightweight**  
Thanks to the new electronics this new generation of product is 30 to 60% lighter than the previous one. The weight of the 24 volt 100 amp unit is just under 4 kg.
- **High-Efficiency DSP technology**  
PRO EVO3 Chargers deliver full power even at very high temperatures (up to 50°C/122°F). This "no derating" feature is quite unique on the market.
- **4 Independent isolated outputs**  
All PRO EVO3 offer 4 independent isolated DC outputs. It allows to simplify the charging system consisting of several battery banks.
- **Selectable battery chemistries**  
8 Selectable charging profiles including Lead Acid, Gel, AGM, Lithium-Ion batteries with temperature compensation.
- **NMEA 2000**  
NMEA 2000 plug & play communication skills. All PRO EVO3 chargers feature CAN communication port including certified N2K port with latest PGEN.
- **Ignition Protected**  
PRO EVO3 12.90 is now ISO 8846 and SAE J1171 certified.

SKU#	#99454	#99474	#99464	#99484
	12V - 90A	24V - 40A	24V - 60A	24V - 100A
<b>Input</b>				
Input voltage	115/230V(+/-15%)			230V(+/-15%)
Frequency	50/60 Hz			
Power factor Cos j	>0.95			
Efficiency	92%			
Max. Consumption	1450 VA	1300 VA	1950 VA	3200 VA
Derating @ 115V	No	No	1300 VA	No
Fuse (Glass type 6.3x32mm)	T20A			
<b>Output</b>				
Number of output	4 isolated (full power)			
Charging profiles	Open lead acid / Sealed lead acid / Lead calcium / Spiral cell AGM / Winterizing / Odyssey Marine / GEL / Power Supply / LiFePO4#1 + BMS / LiFePO4#2 + BMS			
Charge profile selection	Rotary switch 10 positions			
Charging algorithm	I.U.o.U.			
Temperature compensation	+/-2.5mV/°C (Ext temp sensor supplied)			
Max. Amp (+/-5%)	12V-90A	24V-40A	24V-60A	24V-100A
Battery capacity	350 ÷ 900 Ah	200 ÷ 400 Ah	250 ÷ 600 Ah	400 ÷ 1000 Ah
Fuse (auto mini)	5F25A	3F25A	3F25A	5F25A
<b>Protections</b>				
Auto restart when alarm disappears (output, short circuit, output voltage, internal over temp)	Output current limited / Output short circuit / Overload output voltage / Reverse polarity / Over temperature			
<b>General</b>				
Display	LED Panel (State of charge , Power, Alarms)			
Operating temperature	14°F to 131°F (Full power till 122°F)			
Storage temperature	68°F to 158°F			
Humidity	10% to 95% (without condensation)			
Convection	Force fan adjustable speed cooling			
Mounting	Wall mounted 4 x #8 screws			
On/Off Operation	Front Push button or dry contact NO (terminal block 2 pin 1mm <sup>2</sup> )			
Input alarm	Dry contact NO (terminal block 2 pin 1mm <sup>2</sup> )			
Output alarm contact	x2 0.5A 30V NO (terminal block 2 pin 1mm <sup>2</sup> )			
Battery temperature sensor	External sensor (terminal block 2 pin 1mm <sup>2</sup> )			
CAN bus connection	x2 Micro-Fit 3.0			
Communication standard	Navicolor by Scheiber, <b>NMEA 2000</b>			
<b>Standards</b>				
Safety	EN60335-1 / EN 60335-2-29			
Mechanical & Environmental	IEC 60068-2-30/1/52 (climatic, salt spray)			
EMC	EMC 2014/30/EU Directive			
Ignition Protection	SAE J1171/ISO 8846	No		
<b>Enclosure</b>				
Material and color	ABS (thermoplastic polymer)			
Dimensions H x W x D (inches)	11.2 x 14.2 x 4.8 inch			
Weight (lbs)	9 lbs			
Enclosure class	IP22			
AC Connection	WAGO WINSTA Type 770-813 connector			
DC Terminal	4M8 Terminals			

# Dolphin pro



ROBUST AND  
POWERFUL  
MARINE BATTERY  
CHARGER



**#99520**

*Touchview Remote  
Touchscreen Panel*



**#99047**

*Additional Temp Sensor for  
Dolphin PRO charger*



Pro Chargers



Pro-Touch Chargers  
with Integrated Touchview

- Can operate up to 149° F without D rating
- Internal diode isolator without voltage drop
- User friendly design: a solid casing in aluminum, mounting by 4 easily accessible screws
- A front cover allowing easy access to the charge selector and wiring connections (4 solid 5/16" terminals for the battery outputs)
- A cable gland for the input cable and a cable grommet with a waterproof seal
- Integrated Control Panel: LED display indicating the charging curve (boost, absorption, float), as well as anomalies and faults (temperature voltage, fuses...)
- Automatic switch over: equipped with 3 isolated outputs, automatic switch over 115V/230V, 50Hz/60Hz
- 9 charging programs (including 2 winterizing and 1 power supply) depending on battery type, makes this charger suitable for all charging needs
- Optional extras: external Touchview control panel and a battery temperature sensor (included) allowing a charging level adjustment
- Conformal coating of PCB to prolong the life of the battery charger
- Using built-in CAN BUS J1939 interface, the Dolphin Pro can be connected to any monitoring system

Pro Chargers	#99501 *	#99502	#99503	#99504
Pro-Touch Chargers	#99510 *		#99511	#99512
	12V	24V		
	90A	40A	60A	100A
<b>Input</b>				
Input Voltage	115V/230V (+/-15%) Automatic Switch over		230V (+/-15%)	
Frequency	50Hz/60Hz (+/-10%)			
Cos	> 0.9 typ			
Efficiency	83%	87%		
Max. Current 115V/230V	16A/7A	14A/6A	15A/9A	17A
Fuse	T20A		2 x T20A	
<b>Output</b>				
Number of outputs	3 isolated outputs			
Number of Charging curves	Open lead acid / Sealed lead acid / Lead calcium / Delphi Batteries / Spiral cell AGM / Winterizing lead acid / Winterizing GEL & AGM / Power Supply / LifeSo4 + BMS			
Charging curve	IUUo			
Voltage share	+/-2%			
Ripple	< 1% (BW < 20MHz)			
Fuse (automotive mini)	4F30A	3F25A	3F25A	5F25A
<b>Protection</b>				
	Output current limited / Output short circuit / Overload output voltage / Reverse polarity / Over temperature			
<b>General</b>				
Display	LED display or optional multi-color Touchview Controller			
Operating temperature	14° F to 122° F			
Storage temperature	- 4° to 158° F			
Humidity	10% to 95% (without condensation)			
IP	IP22			
Ventilation	Forced fan adjustable speed cooling			
Safety	EN 60335-1			
Housing	Powder coated aluminum			
Mounting	Wall mounted 4 x #8 Screws			
Dimensions	13-7/16"W x 14-1/4" H x 5" D		13-7/16" W x 14-1/4" H x 7-1/2" D	
Weight	13-1/4 lbs.		25-1/4 lbs.	
AC Connection	3-pin cage terminal 10 AWG max			
DC Terminal	4 x 5/16" Terminal Bolts			
Output Alarm Contact	1A 30V NO			
<b>Optional Connections</b>				
Battery Temperature Sensor	2-pin cage terminal 14 AWG			
External Touchview control panel	RJ9 handset connector			
CAN BUS	2 Micro-Fit & RJ9			

\* IP Rated for Engine Rooms

# Dolphin pro HD+



TOUGH  
ENVIRONMENT  
DNV-GL\* TYPE  
APPROVED



- Dedicated to commercial and offshore market
- Type-approved by Det Norske Veritas (DNL-GL)
- DOLPHIN PRO HD+ will be delivered with its Touchview display as standard, measuring AMP/VOLT of battery charger, showing charging mode and alarms (temperature, fuse, battery)
- The HMI touchscreen control panel is a real innovation in the battery charger environment
- Using built-in CAN BUS J1939 interface, the DOLPHIN PRO HD+ can be connected to any monitoring system
- Built-in alarm relay is included for remote alarm system
- Conformal coating of PCB to prolong the life of the battery charger
- Compatible with MARBLE Automatic NL (approved Oct. 2014)

\* Certificate No. E-14112/ File No. 822.20/ Job ID 262.1-018698-1  
Type tests in accordance with IEC 60335-1 & IEC 60335-2-29. Low temperature & vibration tests in accordance with Sfc No. 2.4 Class A. Humidity / Damp heat tests in accordance with Sfc No. 2.4 Class B. EMC in accordance to Sfc No. 2.4 Class A


SKU#	#99165	#99175	#99185
	<b>24V</b>		
	40A	60A	100A
<b>Input</b>			
Input Voltage	115V/230V (+/-15%) Automatic Switch over		230V (+/-15%)
Frequency	50Hz/60Hz (+/-10%)		
Cos	0.9 typ		
Efficiency	85%		88%
Max. Current 115V/230V	12A/6A	12A/9A	15A
Fuse	T20A		2 x T20A
<b>Output</b>			
Number of outputs	3 isolated outputs		
Number of Charging curves	9 Programs, Open lead acid / Sealed lead acid / Lead calcium / Delphi Batteries / Spiral cell AGM / Winterizing lead acid / Winterizing GEL & AGM / Power Supply / LifeSo4 + BMS		
Charging curve	IUUo 3 modes		
Voltage share	+/-2%		
Ripple	< 1%		
Fuse (automotive mini)	3F30A		5F30
<b>Protection</b>			
	In case of output overload, Excessive internal temperature, Charging voltage too high, Reverse battery polarity (fuse), Excessive battery temperature, Temperature sensor default, AC over and under voltage		
<b>General</b>			
Display	Touchview control panel		
Operating temperature	14° F to 149° F		
Storage temperature	- 4° to 185° F		
Humidity	10% to 95% (without condensation)		
IP	IP22		
Ventilation	Forced fan adjustable speed cooling		
Safety	EN 60335-29-2		
EMC	Emission EN 55014-1		
Housing	Powder coated aluminum and composite materials (LED)		
Mounting	Wall mounted 4 x #8 Screws		
Dimensions	13-7/16"W x 14-1/4" H x 5" D		13-7/16" W x 14-1/4" H x 7-1/2" D
Weight	13-1/4 lbs.		26-1/2 lbs.
AC Connection	3-point cage terminal 10 AWG max		
DC Terminal	4 x 5/16" Terminal Bolts		
Output Alarm Contact	1A 30V NO		
<b>Optional Connections</b>			
Battery Temperature Sensor	2-pin cage terminal 14 AWG		
CAN BUS	2 Micro-Fit & RJ9 handset connector		

## CHARGE DC BATTERY FROM ANOTHER



- Dolphin Booster is a DC to DC intelligent 30 amp battery charger
- Product range: 12 volt or 24 volt input with 24 volts output
- Typical application: charge an auxiliary battery bank from any 12V or 24V source
- The smart DOLPHIN DC/DC BOOSTER provides 4 stage charging program as well as automatic protection against battery source drainage
- Advance and unique 4 charging programs can be selected based on battery type (lead acid, gel, agm or LiFeSo4)
- Conformal coating of PCB to prolong the life of the battery charger

## DOLPHIN BOOSTER SUBSYSTEM

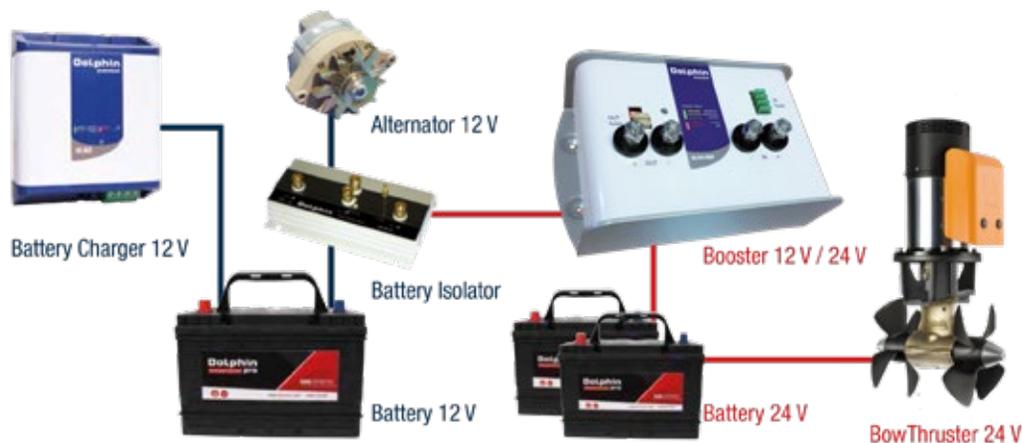

SKU#	#99201	#99202
	12V	24V
	30A	
<b>Input</b>		
Input Voltage	13V +/- 3V	26V +/- 6V
Max. Current	70A	35A
Efficiency	85% to 90%	
Fuse	4 x F30A	
<b>Output</b>		
Number of outputs	1 output	
Battery Voltage	24V	
Battery Capacity	50 to 200 Ah	
Output Voltage	26.5V to 30V +/- 1%	
Max. Current	30A +/- 5%	
Number of charging Curves	4 Programs, position selected by dip switch, Lead Acid, AGM, Gel, LiFeS04	
Charging Curve	IUUo	
Ripple	< 1%	
Fuse	2 x F25A	
<b>Protection</b>		
	In case of output overload, Excessive internal temperature, Reverse battery polarity (fuse)	
<b>General</b>		
Display	Tricolor LED	
Operating temperature	14° F to 130° F	
Storage temperature	- 4° to 158° F	
Humidity	10% to 90% (without condensation)	
Ventilation	Forced fan cooling	
Dimensions	9-7/8" W x 6" H x 3-1/8" D	
Weight	4-1/2 lbs.	
Input Connection	5/16" Terminal Bolts	
Battery Connection	5/16" Terminal Bolts	
<b>Optional</b>		
	Can Bus connection with Touchview or Navicolor RJ9 and/or Micro-Fit connection	

## TOUCHVIEW Control Panel



- External touch screen control panel for Dolphin chargers
- Can Bus connection
- Supervise your battery charger and battery banks
- Displays temperature, error messages, charging current, charge curve selected, charging phase (boost, absorption, float), power max delivered



SKU#	<b>#99520</b>
	<b>12V / 24V</b>
<b>General Information</b>	
Screen Size	2.4" diagonal
LED Type	a-Si TFT
Color Configuration	RGB vertical stripe
Backlight	White LED
Interface	16-bit interface for i80 system
Conformity	ROHS
Diameter overall	3-5/8"
Waterproof Rating	IP65 (front panel only)
Cutout and depth	2-7/8" Diameter x 1" Deep

**99526** 9' Cable supplied with Touchview.

**99527** Custom Length Cable with RJ9 connectors sold by the foot. Maximum Length 65'.

## Batview Battery Monitor



- Read your battery bank like a fuel gauge
- Provides critical information about the status of your battery bank
- Displays voltage, current, consumed amp hours and remaining battery capacity
- Secondary battery bank voltage monitoring
- Auto sensing battery voltage inputs
- Large backlit LCD display
- Quick nut mounting construction
- Programmable alarm relay
- Shunt selection capability enables flexible system integration
- Splash proof front panel
- 500 amp shunt included



SKU#	<b>#99031</b>
	<b>12V / 24V</b>
<b>General Information</b>	
Main Battery Functions	Volts, Amps, Amp hours, State of charge, Low battery alarm
Auxiliary Battery Functions	Volts
Display	Multi-function LCD
Supply Voltage Range	9 to 35 VDC (± 0.1V)
Supply Current*	9mA @ 12 VDC 7mA @ 24 VDC
Input Voltage Range Main Battery Auxiliary Battery	0 to 35 VDC (± 0.3%) 2 to 35 VDC (± 0.3%)
Input Current Range**	-999 to +999A (± 0.4%)
Battery Capacity Range	20 to 999Ah
State-of-Charge	± 1%
Operating Temperature	-4 to 122°F
Mounting Hole	2-1/16" to 2-1/8" dia. (52 - 54mm)
Monitor Dimensions	Front Panel Ø 2-1/2" (64mm) Body Ø 2" x 3-1/8" Total Depth
Shunt Dimensions	Footprint 1.77" x 3.43" (45 x 87mm) Base Height 0.67" (17mm) Overall Height 1.38" (35mm)
Waterproof Rating	IP65 (front panel only)
Monitor Weight	0.21 lb (95 g)
*Measurement with backlight and alarm relay turned off. **Depends on selected shunt. With standard 500A / 50mV shunt (350A continuous), the range is limited from -600 to +600A)	



## PEDESTALS - ACTUATORS - TV LIFTS



Pedestals



*Courtesy of Chris Craft*

# Heavy-Duty Table Pedestal for Large Tables

## Stainless Steel Electric Table Pedestal


Electric table pedestals offer the height of luxury on any boat. These heavy-duty table pedestals are designed for extra stability on smaller boats in rough conditions or on larger boats with oversized tables. Beautifully finished Stainless Steel or aluminum alloy will protect against the elements for many years. Anyone can raise and lower tables with the push of a button. Perfect as a single pedestal or used as synchronized pairs with larger tables or sun pads.



Manufactured from beautiful and durable **316 Stainless Steel** with a high luster polished finish, this unique pedestal is designed to appeal to the most discerning of boat owners. The oval, wide body tubular shape is in keeping with modern design and provides support to handle larger sized tables without unwanted movement – and a lifetime of trouble free service. The pedestal is IP67 rated and certified Marine Ignition Protected.

With the touch of a button, this pedestal telescopes from coffee table height to dining height (14.5" - 27.5") in just 20 seconds. The electric movement can be stopped simply by releasing the switch. Other than a drain connection (for exterior installations) and the power cable, the pedestal base does not protrude through the deck.

**#40400** 12V Pedestal, **#40401** 24V Pedestal

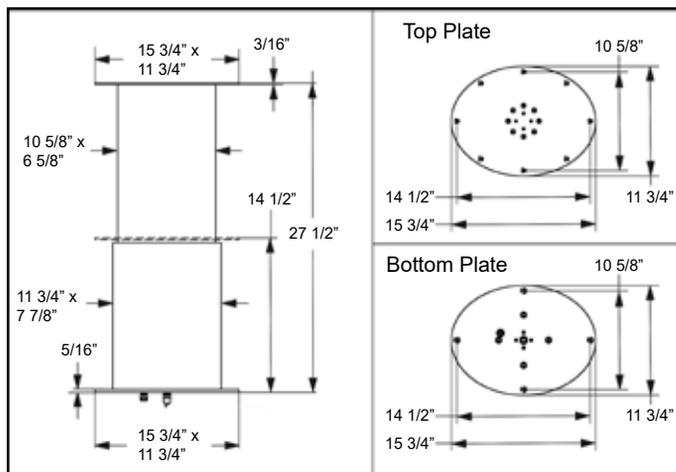

MARINE  
IGNITION  
PROTECTED



# Heavy-Duty Table Pedestal for Large Tables




## Aluminum Three-Stage 6" FLUSH Electric Table Pedestal

**NEW Three-Stage 6" Through-the-Deck Electric Table Pedestals** allows a lower minimum height when the inner tubes retract inside the larger outer tube. Larger diameter telescoping tubes give greater stability to this base. Suitable for exterior applications. Maximum capacity is 220 lbs.

**Material:** Polished, brightened and anodized light alloy.

**#40250** 12V Three Stage 6" Pedestal

**#40251** 24V Three Stage 6" Pedestal

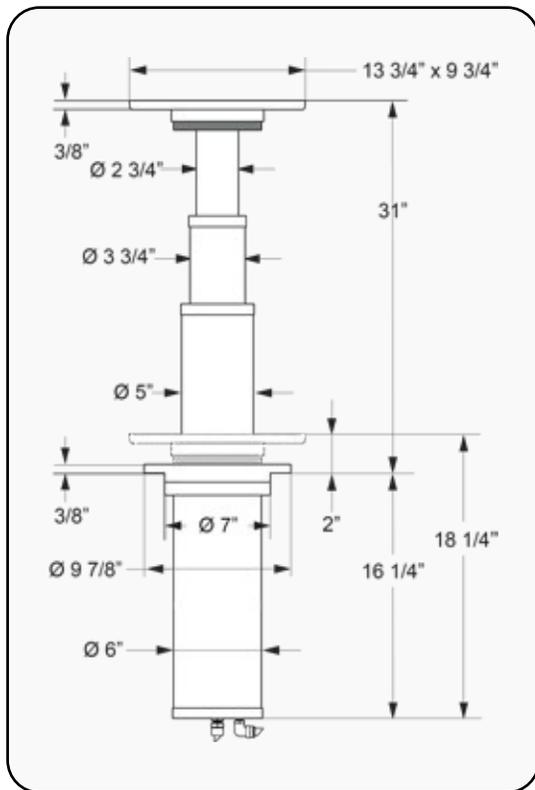

**View of Pedestal lowered in down position**





Pedestals



# Heavy-Duty Table Pedestal for Large Tables

## Aluminum Two-Stage 6" FLUSH Electric Table Pedestal

**Two-stage, Through-the-Deck, 6" Electric Table Pedestal** allows a lower minimum height when the inner tubes retract inside the larger outer tube. Larger diameter telescoping tubes give greater stability to this base. Suitable for exterior applications. Maximum capacity is 220 lbs.

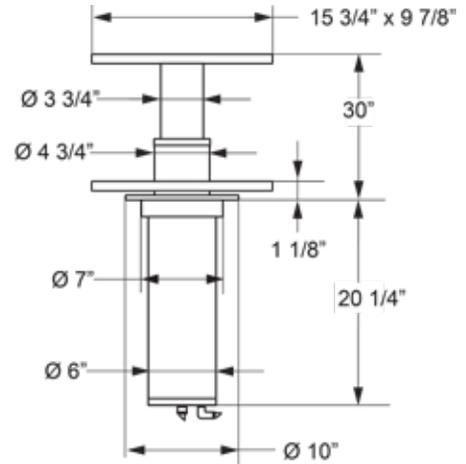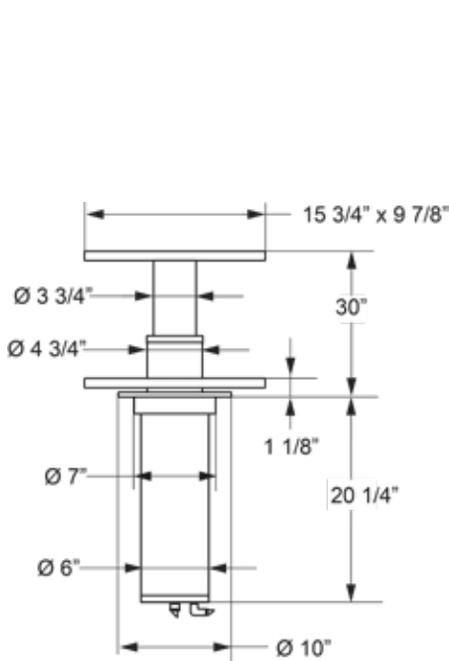

- #40169 12V Single Pedestal with 28-3/4" Stroke
  - #40168 12V Single Pedestal with rotating top (90° lock points)
  - #40200 12V Encoded Synchronized Pair
  - #40189 24V Single Pedestal
  - #40220 24V Encoded Synchronized Pair
- Max. height dimension is 32 5/8"  
below deck dimension is 21 1/2".

- #40170 12V Single Pedestal with 31-1/2" Stroke
- #40221 12V Encoded Synchronized Pair
- #40190 24V Single Pedestal
- #40222 24V Encoded Synchronized Pair



## Heavy-Duty Table Pedestal for Large Tables




### Aluminum Three-Stage 6" Electric Table Pedestal

**NEW Three-Stage 6" Electric Table Pedestals** offer the height of luxury on any boat. These heavy-duty table pedestals are designed for extra stability on smaller boats in rough conditions or on larger boats with oversized tables. Beautifully finished aluminum alloy will protect against the elements for many years. Anyone can raise and lower tables with the push of a button. Perfect as a single pedestal or used as synchronized pairs with larger tables or sun pads. Both top plate and mounting plate measure 11-3/16" in diameter with large 6" diameter base tube. Rated at 220 lbs. capacity for each pedestal. 15-3/4" Stroke

**Material:** Polished, brightened and anodized light alloy.

**#40240** 12V Three Stage 6" Pedestal

**#40241** 24V Three Stage 6" Pedestal

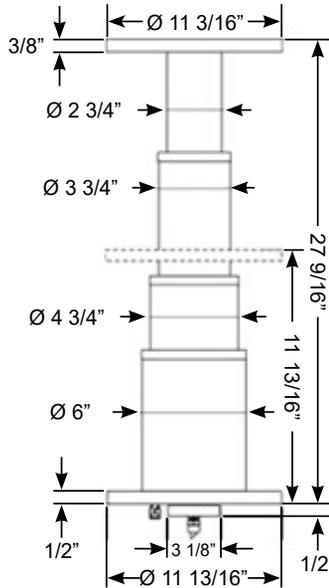

### Aluminum Two-Stage Electric 6" Table Pedestal


**Large Heavy-Duty Aluminum Alloy Pedestal.** Perfect as a single pedestal or used as synchronized pairs with larger tables or sun pads. Both top plate and mounting plate measure 15-3/4" in diameter with large 6" diameter base tube. Drain is on the deck. Rated at 220 lbs. Capacity for each pedestal. Max. 2 full cycles in 5 minutes. Shipping Weight: 42 lbs.

**#40173** 12V Single Pedestal,

**#40273** 12V Encoded Synchronized Pair

**#40177** 12V Single Pedestal with 12-3/4" x 8-7/8" rectangular top (15mm higher)

**#40174** 24V Single Pedestal, **#40274** 24V Encoded Synchronized Pair

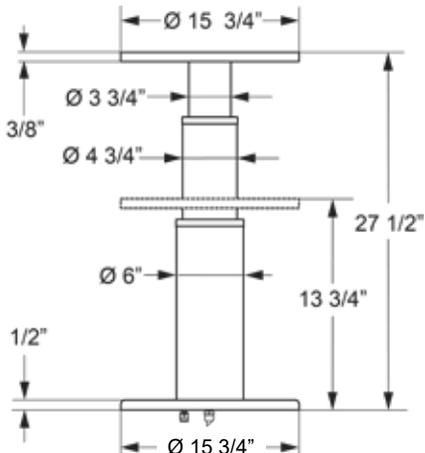

Only the power wire goes through the deck.  
Water drains onto the deck




# Heavy-Duty Table Pedestal for Large Tables


**Two-Stage 6" Electric Pedestal.** Heavy duty construction with a 15" minimum height. 220 lbs. capacity. Suitable for interior or exterior applications. Drain is on the deck. **15 3/4" stroke.**

**#40147** 12V Single Pedestal (15 3/4" Stroke)

**#40181** 12V Single Pedestal (13 3/4" Stroke)

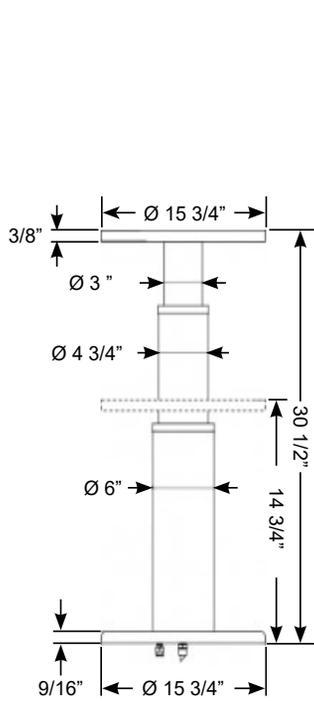


#40147 Diagram

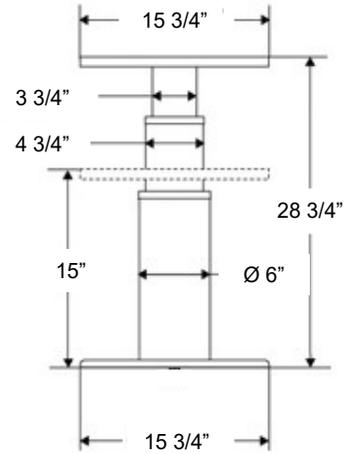

#40181 Diagram

**Two-Stage 6" Electric Pedestal.** Heavy duty large body (6" diameter lower tube) with a rotating top. 220 lbs. capacity. Suitable for interior or exterior applications. **13-1/2" stroke.**


**#40193** 12V Single Pedestal

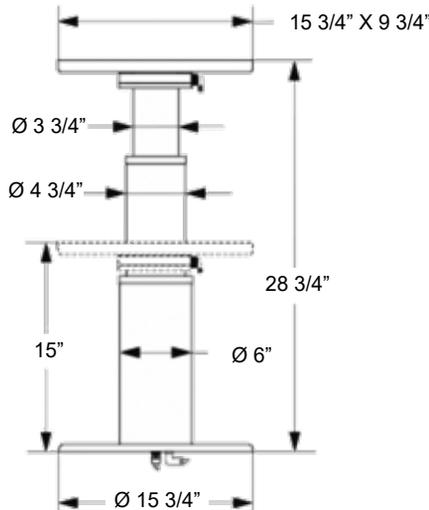

## Heavy-Duty Table Pedestal for Large Tables



**Two-stage 6" Electric Pedestal.** Same heavy duty construction with through-the-floor design to allow a lower minimum height with the same 220 lbs. capacity. Suitable for interior or exterior applications. Allow 5" minimum clearance below the deck for the wire and drain. 15 3/4" stroke.

- #40183 12V Single Pedestal
- #40179 12V Single Pedestal  
with 11" x 9-3/4" Top (15mm higher)
- #40283 12V Encoded Synchronized Pair
- #40184 24V Single Pedestal
- #40284 24V Encoded Synchronized Pair

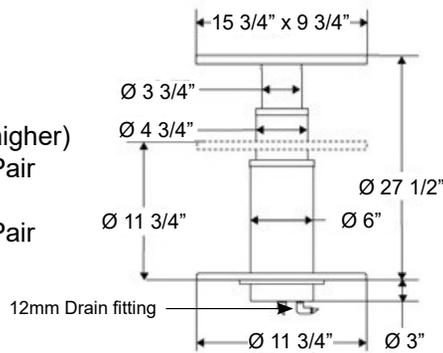



**Two-stage 6" Electric Pedestal with sliding upper plate to adjust table distance from seating.** Built in polished, brightened and anodized light alloy Sliding upper plate with 7.8" stroke to adjust the table distance from seating The generous size of the tubes and bases make it ideal for tables of large dimensions. The two stages telescope enables to get a reduced minimal height, often necessary to transform a table in bed. Push 220 lbs.

- #40162 12V Single Pedestal
- #40163 24V Single Pedestal

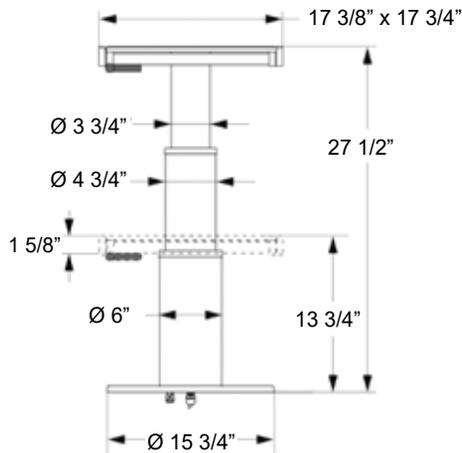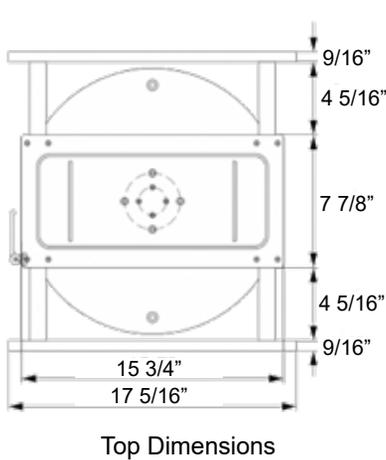

**Two-stage 6" Electric Pedestal with sliding upper plate to adjust table distance from seating.** Built in polished, brightened and anodized light alloy Sliding upper plate with 7.8" stroke to adjust the table distance from seating The generous size of the tubes and bases make it ideal for tables of large dimensions. The two stages telescope enables to get a reduced minimal height, often necessary to transform a table in bed. Push 220 lbs.

- #40245 12V Single Pedestal
- #40246 24V Single Pedestal

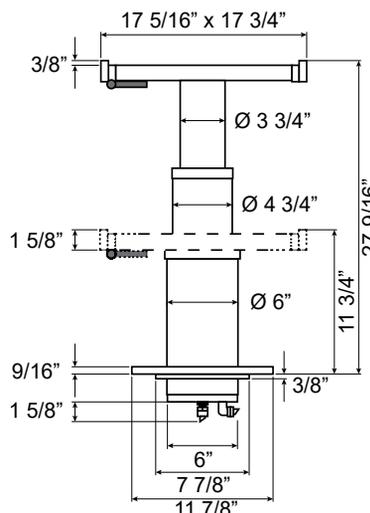

## Heavy-Duty Table Pedestal for Large Tables




### Aluminum Single Stage 6" Electric Table Pedestal

**Single-stage, 6" Deck Mount, Electric Table Pedestal** allows a lower minimum height when the inner tubes retract inside the larger outer tube. Larger diameter telescoping tubes give greater stability to this base. Suitable for exterior applications. Maximum capacity is 220 lbs. Maximum table dimensions 3' x 4'. Available in tandem version.

**#40175** 12V Single Pedestal

**#40176** 24V Single Pedestal

*SPECIAL ORDER ENCODED SYNCHRONIZED PAIRS*

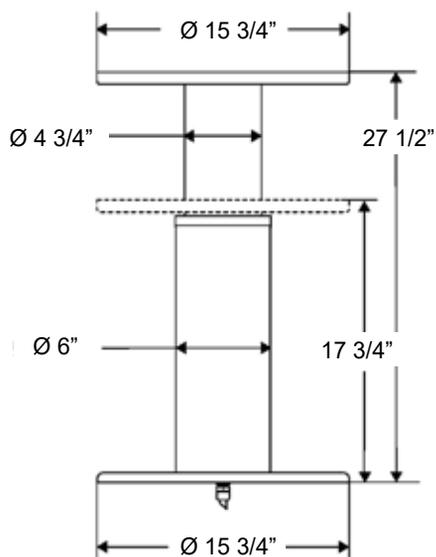




## Aluminum Two-Stage 5" Electric Table Pedestal

**NEW Two-Stage 5" Electric Pedestal.** Built in polished, brightened and anodized light alloy. The size of the tubes and bases make it ideal for tables of medium dimensions not exceeding 31 1/2 x 31 1/2". The two stages telescope enables to get a reduced minimal height, often necessary to transform a table in bed. Stroke 13 3/4".

**Material:** Polished, brightened and anodized light alloy.

**#40231** 12V Two Stage 5" Pedestal Square Top

**#40232** 24V Two Stage 5" Pedestal Square Top

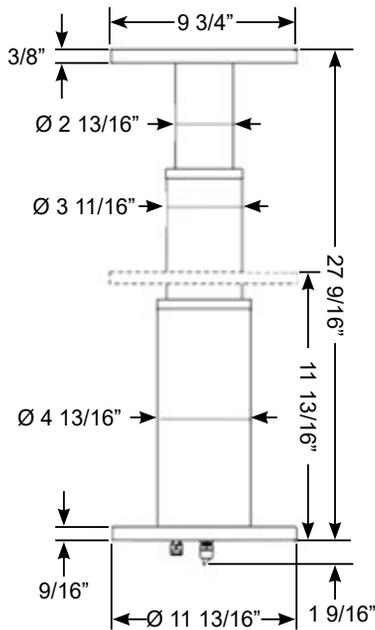


# Medium Duty Electric Table Pedestals

## Aluminum Single Stage 5" Electric Table Pedestal


**Single-Stage, Deck Mount, 5" Electric Table Pedestal.** Maximum capacity is 220 lbs. 9 7/8" stroke.

- #40164 12V Single Pedestal Square Top
- #40188 24V Single Pedestal Square Top

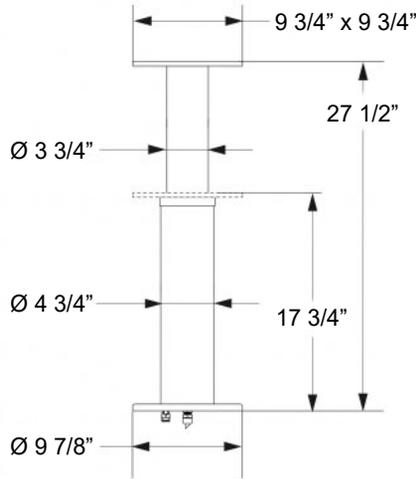


Heavy duty construction with through-the-floor design to allow a lower minimum height with the same 220 lbs. capacity. Suitable for interior or exterior applications. Allow 7" minimum clearance below the deck for the wire.

- #40161 12V Single Pedestal (13-1/2" Stroke)
- #40159 12V Single 4" Pedestal (13-3/4" Stroke)

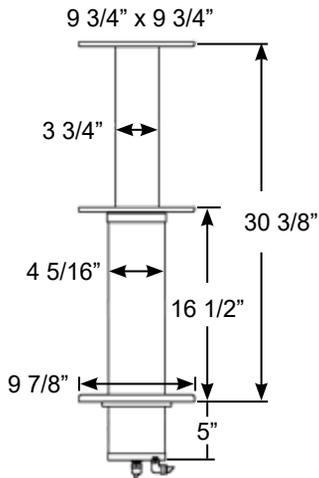

#40161 Diagram

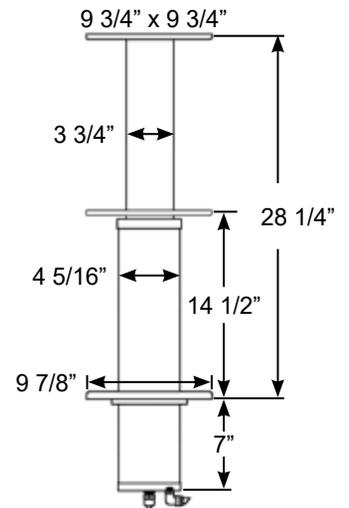

#40159 Diagram

# Medium Duty Electric Table Pedestals



## Aluminum Two-Stage 4" Electric Table Pedestal

### Two-stage, 4" Deck Mount, Electric Table Pedestal.

Maximum capacity is 220 lbs. Maximum table dimensions 2' x 3'.

**#40154** 12V Single Pedestal X- Top

**#40155** 24V Single Pedestal X- Top

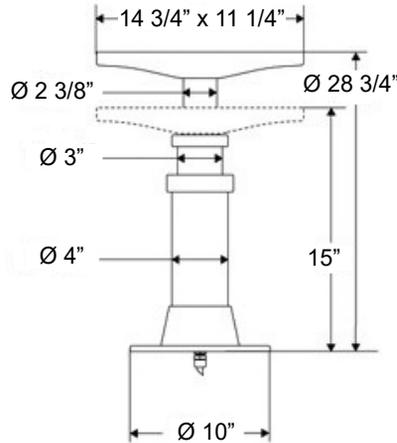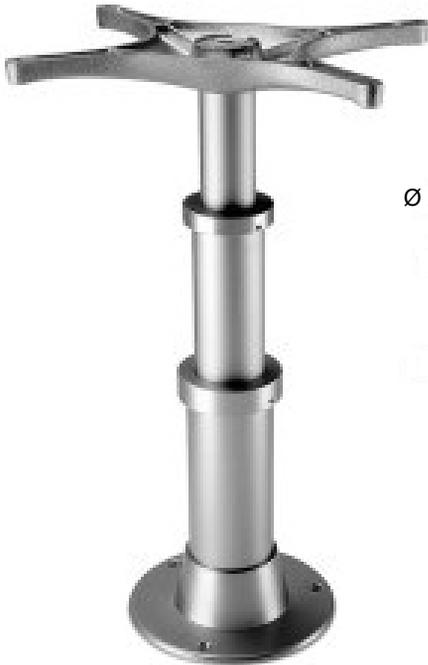


**Two-Stage 4" Telescopic, Through-the-deck, Electric Table Pedestal.** This version has a lower main tube which can be slid down through the base to obtain a lower minimum and maximum height. Total stroke is 15-3/4". Suitable for exterior applications. Maximum capacity is 220 lbs. Maximum table dimensions 2' x 3'.

**#40198** 12V Single Pedestal X-Top



Use a 4mm Allen Wrench

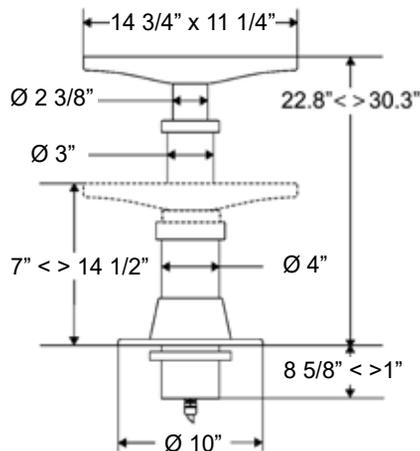


# Medium Duty Electric Table Pedestals

## Aluminum Single Stage 4" Electric Table Pedestal

### Single-stage, 4" Deck Mount, Electric Table Pedest

Maximum capacity is 220 lbs.

#40160 24V Single Pedestal Rectangular Top

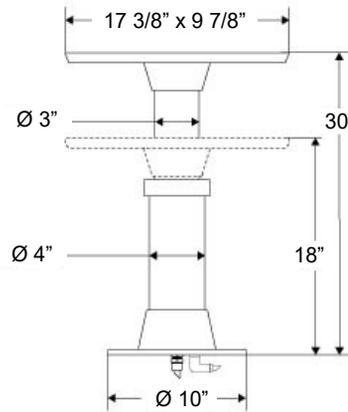


### Single-stage, 4" Through-the-deck, Electric Table Pedestal. Total stroke is 13-3/4". Suitable for exterior applications. Maximum capacity is 220 lbs.

#40152 12V-10A Single Pedestal Rectangular Top

#40157 24V Single Pedestal Rectangular Top



Use a 4mm Allen Wrench

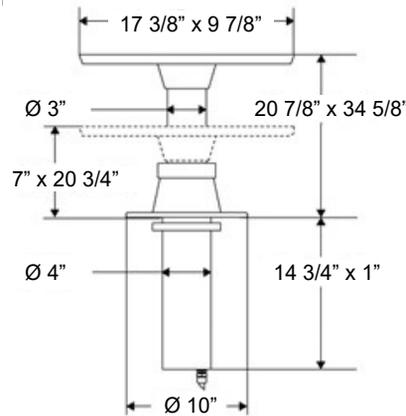


**Single-Stage, 4" Through-the-deck, Electric Table Pedestal**, has an adjustable, through the deck, periscope base which allows for lower minimum height. Table will swivel and lock with under-top handle. Maximum under deck area needed is 14.34" Maximum capacity is 220 lbs.

#40166 12V Single Pedestal

#40171 24V Single Pedestal



Use a 4mm Allen Wrench

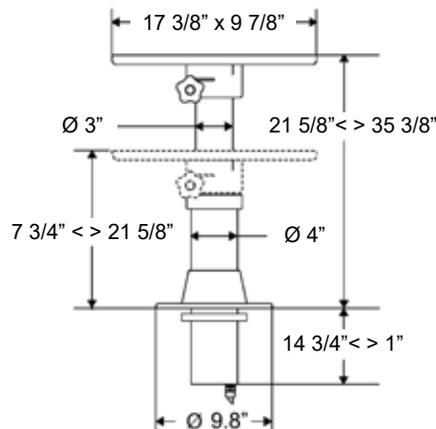


## Aluminum Single-Stage 3" Electric Table Pedestal

### Single-Stage, 3" Deck Mount, Electric Table Pedestal.

Tops are available with either rectangular or X-top versions. Maximum capacity is 220 lbs. 9.8" stroke.

**#40151** 12V Single Pedestal X-Top

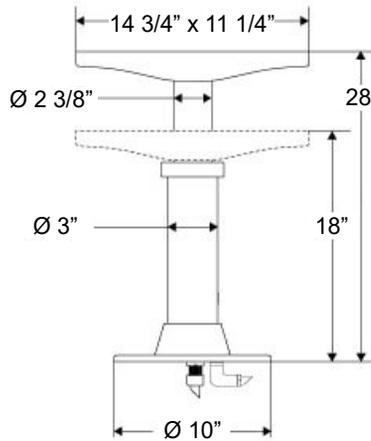


### Single-Stage, 3" Through-the-deck, Electric Table Pedestal

Suitable for indoor or outdoor applications. Maximum capacity is 220 lbs. 18.7" stroke.

**#40153** 12V Single Pedestal X-Top



Use a 4mm Allen Wrench

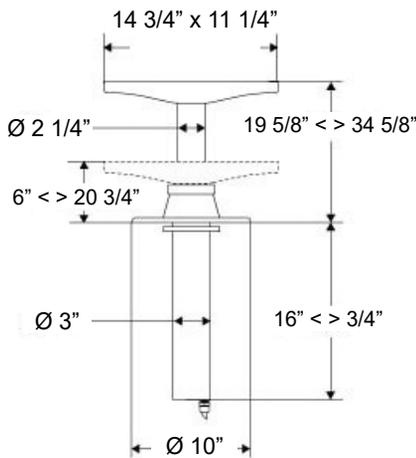




## Aluminum Single-Stage 4" Electric Chair Pedestal

**Telescopic 4" Electric Chair Pedestal** with under floor protrusion.

Heavy duty construction with through-the-floor design (150mm hole) to allow a lower minimum height with the same 550 lbs. capacity. The generous size of the tubes makes it ideal for large chairs. 5 1/8 stroke.


**#40167** Single Stage 4" Surface Mount Seat Pedestal 12V

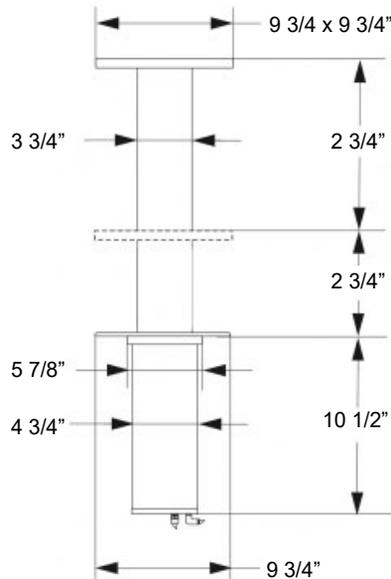

### Single-stage, 4" Electric Chair Pedestal.

5" stroke, base will swivel 360° with locking position every 90°. Suitable for interior or exterior use. Maximum capacity is 550 lbs.

**#40199** 12V Chair Pedestal

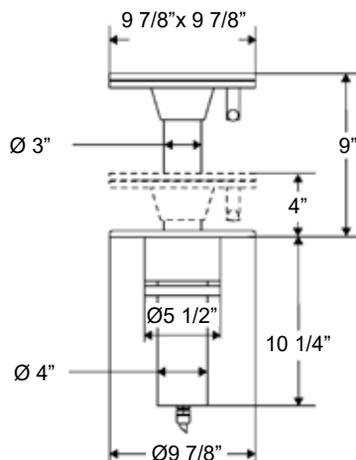


## Aluminum Single Stage 4" Electric Chair Pedestal

### Single-stage, 4" Surface Mount, Electric Chair Pedestal.

5" stroke, base will swivel 360° with locking position every 90°.

Suitable for interior or exterior use. Maximum capacity is 550 lbs.

#### #40156 12V Chair Pedestal

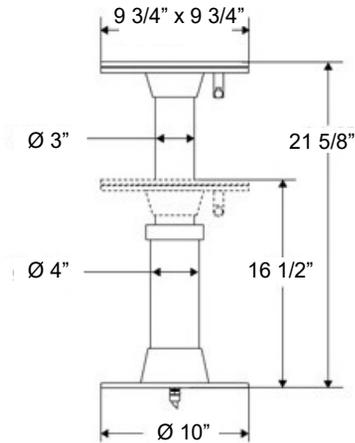


## Gastable Pedestal

### Free Standing 4" Manually Operated, Gas Piston Pedestal.

13-1/2" stroke. Built in polished and anodized light alloy Pedestal suitable for medium size tables. Push of 65 lbs. - The piston can be locked in any intermediate position - Stroke 11". When the handle is loose the top can rotate over 360°. In calm conditions the large base allows to use it also when not locked to the floor. Two holes in the base allows to fix the pedestal in a preset position.

#### #40148 Manual Single Stage 4" Pedestal

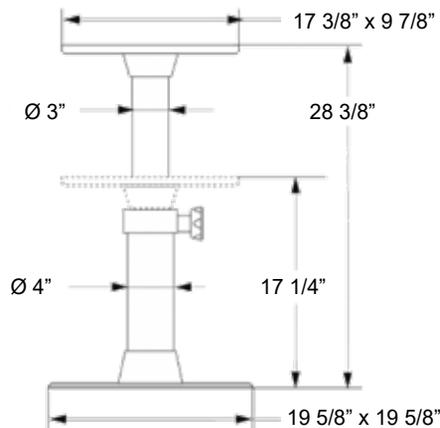

## Linear Actuators

We produce and supply a wide range of **electrically powered struts** to suit **many different applications** in addition to lifting engine covers and hatches. Our struts are being used to **lift** tables and steer consoles, to **slide** open roofs, as well as to **hide** barbecues and TV's after use. You can see them **converting** beds at the touch of a switch and even sliding security bars into position behind exposed windows! No limit to the imagination... Different solutions are available to get the most appropriate device for the specific job, with **thrusts from 120 to 2,200 lbs, strokes from 2" to 9-1/2 ft., speed from 0.1 to 1.4 inches/sec** on either **12 or 24 Volt DC** supply. Both **"push only"** and **"push/pull"** versions are available, with or without encoder. But what all our struts have in common is having been designed and built to work in the **marine environment with an IP65 rating**: their structure of anodized light alloy protects the motor and the mechanical components from spray and salt. Replacement parts and repair service available at Scandvik!

To select the appropriate strut suitable for your needs, you have to consider several factors. For instance, if the purpose is to raise a hatch that is the only access to the compartment, we would advise using the "push-only" versions as these permit manual opening in the event of power breakdown. Otherwise an emergency access will have to be provided in order to, at least, unbolt the strut. Other factors to be considered are the point and the angle of thrust that significantly affect the effort required. Moreover, if the lift reaches the tipping point, you must use a "push/pull" version that allows for the opening and closing by the strut. **For more details** please request our instructions. The installation of a pair of struts to work together without encoder is possible only if both the struts required the same effort, otherwise it is necessary to choose the synchronized version with encoder. The pairs must be ordered as such: it is not possible to couple struts supplied as singles.




## Calculation of the thrust needed at the point of leverage.

The thrust required to open a hatch by means of an actuator depends on the point of the leverage and the weight of the hatch itself. As an example, we provide the data for a rectangular hatch of uniform construction, which is located in a horizontal position when closed. The weight is 220 lbs. Hinged on one side that is 3'-4" from the opposite side. The thrust required to lift varies as follows depending on the distance of the point of thrust of the actuator from the hinges "a" and

the angle "G°" that it forms with the perpendicular:

G°	40" (a)	20" (a)	9" (a)	5" (a)
0°	110 lbs	220 lbs	441 lbs	882 lbs
30°	126 lbs	254 lbs	507 lbs	1,014 lbs
45°	156 lbs	313 lbs	626 lbs	1,252 lbs
60°	220 lbs	441 lbs	882 lbs	1,764 lbs

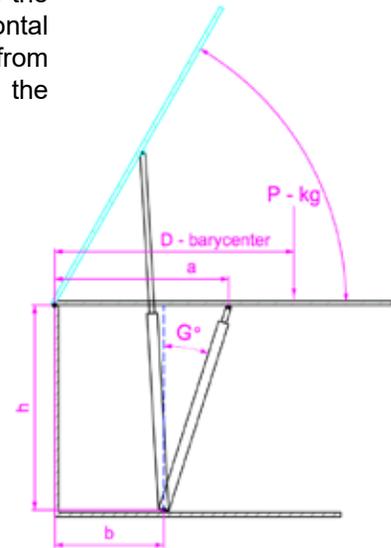

**It is evident that the thrust varies greatly according to the chosen assembly**, and that the most favorable conditions are obtained by applying the thrust point as far away as possible from the hinges and with the actuator in a position perpendicular to the closed hatch.

For those who wish to proceed to the calculation, the formula for obtaining the necessary thrust for lifting is the following:

$$F = (P \cdot D) / b$$

Where **F** is the force required for lifting in pounds, **P** is the weight in pounds of the hatch including everything integral with it, and **D** is the distance of the center of gravity of the hatch from the hinges and **b** is the distance of the point of thrust from the hinges. In most common cases, when the hatch has a rectangular shape and constant density, **D** is simply equal to half the distance between hinges and opposite end of the hatch. In more complicated cases, such as when objects are mounted on the hatch such as seats or more, you can find **D** empirically by resting the hatch on a shaft parallel to the axis of rotation of the hinges (after detaching the hinges) to identify the center of gravity.

The formula for the thrust required of the actuator is a function with respect to the vertical.

$$F / \cos G^\circ$$

Where "G°" is the angle of the actuator relative to the vertical when it is closed. In practice the force **F** obtained by the first formula to be multiplied by the following values:

$$15^\circ = 1.035 \quad 30^\circ = 1.15 \quad 45^\circ = 1.42 \quad 60^\circ = 2.0 \quad 75^\circ = 3.86$$

When calculating the necessary thrust, take into account the friction caused by the hinges, increasing the value obtained by 20%.

In the case where superstructures, such as seats, console, etc., are mounted on the hatch, presents another problem. When the opening angle exceeds the point where the perpendicular to the center of gravity falls outside the hatch, this will increase the opening without need for further thrust. You will then have to use a push pull actuator to "pull" the door being closed.


### The possible use of two parallel actuators (Coupled) to lift hatches or doors.

Large, heavy hatches or doors can be lifted on both sides by two paired actuators. It is important ensure that the actuators have the same speed during operation. The speed depends on the load, so if the two actuators are carrying a different load, the speed will always be different. Encoded controlled actuators are available to synchronize the motion of two actuators, regardless of the load differential. Not all models can be controlled synchronously. Only the customer can determine which solution is applicable.

# Linear Actuators

## THRUST 220 LBS.

Inch Dimension + stroke = length of strut closed + stroke = length of strut extended

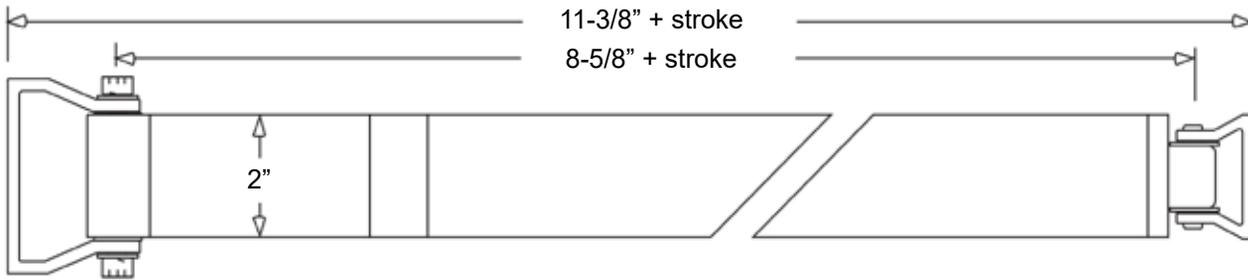

#40121	Push-Pull	with magnetic end of stroke	Stroke 19"	12 Volt	8 Amp
#40124	Push-Pull	Encoded	Stroke 19"	12 Volt	8 Amp
#40123	Push-Pull	with magnetic end of stroke	Stroke 26"	12 Volt	8 Amp
#40125	Push-Pull	with magnetic end of stroke	Stroke 36"	12 Volt	8 Amp
#40126	Push-Pull	Encoded	Stroke 36"	12 Volt	8 Amp

Cylinder, piston and brackets in anodized Aluminum.


**HIGH SPEED VERSIONS:** Ideal for handling structures with long stroke due to their high travel speed, **not suitable for lifting.** It is essential that long struts are properly supported if positioned horizontally to prevent flex.

**Magnetic End of Stroke:** Adjustable magnetic pick-up sensors can be placed at the appropriate locations along the cylinder to stop the movement of the piston in both directions.

**Encoder:** Struts for installation in pairs, equipped with encoded electronics and control unit to obtain a perfect synchronization, even when subject to different loads. It is possible to store up to four different and independent end positions, pre-set by the user at the time of installation, selectable with just a short press of a single button. Can also be used individually when such a precise movement is required, defining a different points of start and end of stroke. Comes with backlit push button control and programming control box.

- Push-Pull Versions allows the same power in both directions (in and out).
- Push-Only Versions allows to lift the struts by hand in case of lack of power or breakdown.
- Available as a pair.
- Supplied with an electronic control box for each strut to control and protect against overloads.
- It's necessary to add a 3 positions switch with automatic return to the OFF state.
- Available for 12 or 24VDC power.
- Available with strokes ranging between 4" and 114".
- IP65 Splash Proof

### 220 LB. CAPACITY

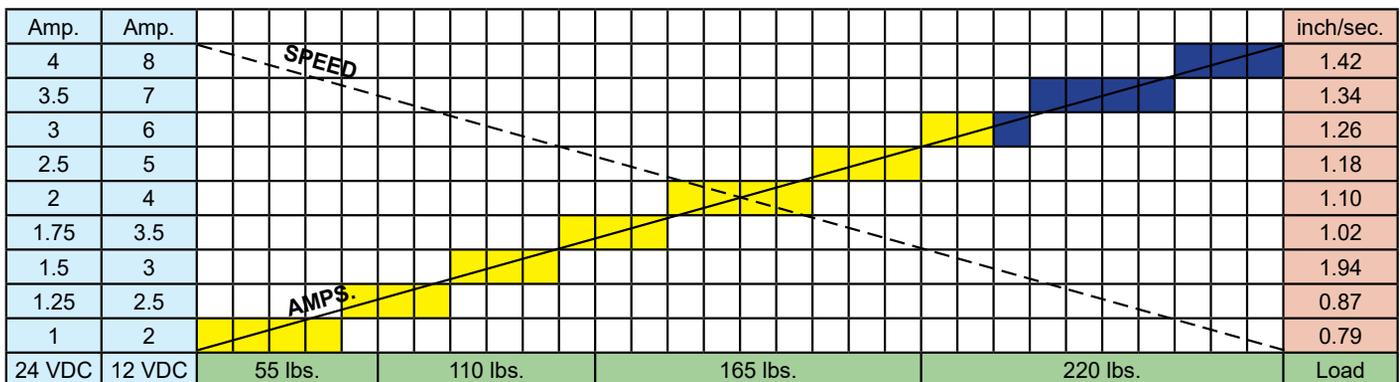


Max. 4 cycles/10 minutes (Yellow) | Max. 2 cycles/10 minutes (Blue)

# Linear Actuators

## THRUST 405 LBS.

Inch Dimension + stroke = length of strut closed + stroke = length of strut extended

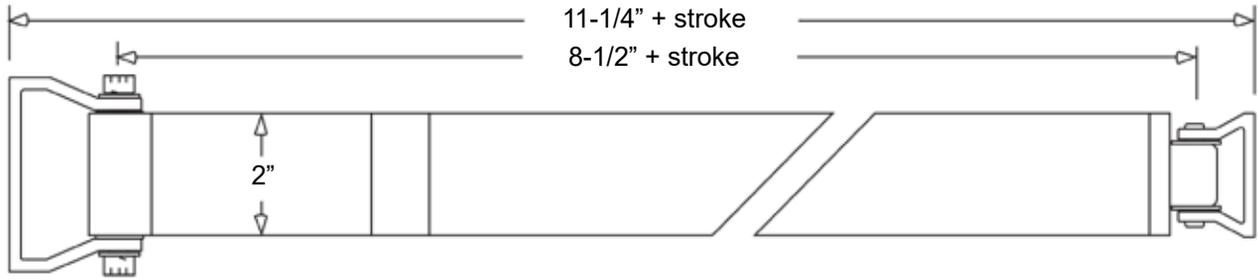


#40104	Push-Pull	Stroke 4.5"	12 Volt	8 Amp
#40105	Push-Pull	Stroke 12"	12 Volt	10 Amp
#40112	Push-Pull	Stroke 12"	24 Volt	8 Amp
#40111	Push-Pull	Stroke 16"	12 Volt	8 Amp
#40100	Push Only	Stroke 19"	12 Volt	8 Amp
#40101	Push Only	Stroke 23"	12 Volt	8 Amp

### Cylinder, piston and brackets in anodized Aluminum.

- Push-Pull Versions allows the same power in both directions (in and out).
- Push-Only Versions allows to lift the struts by hand in case of lack of power or breakdown.
- Available as a pair.
- Supplied with an electronic control box for each strut to control and protect against overloads.
- It's necessary to add a 3 positions switch with automatic return to the OFF state.
- Available for 12 or 24VDC power.
- Available with strokes ranging between 4" and 114".
- IP65 Splash Proof
- Previous thrust was 330 lbs.


### 405 LB. CAPACITY

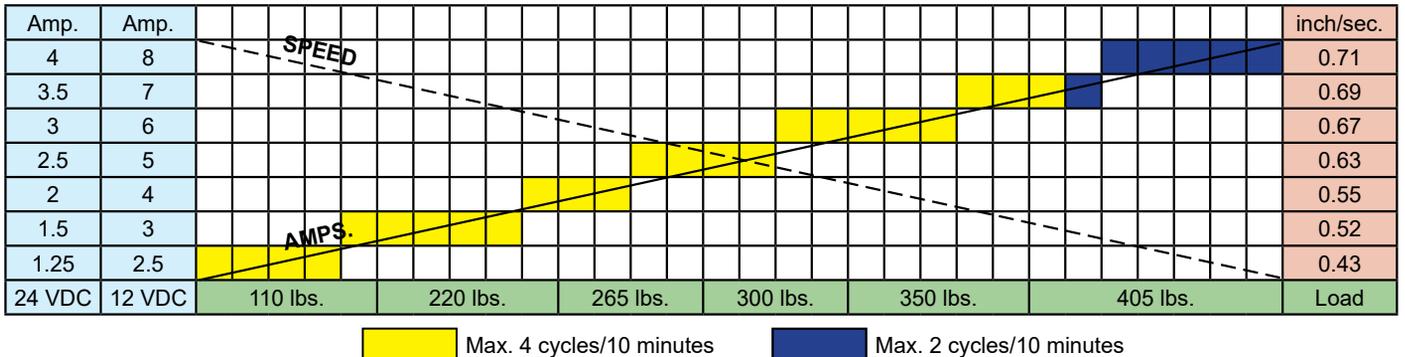

# Linear Actuators

## THRUST 550 LBS.

Inch Dimension + stroke = length of strut closed + stroke = length of strut extended

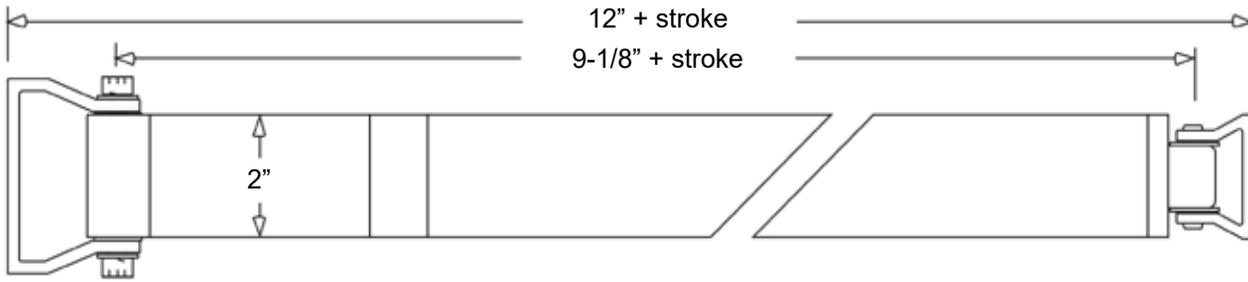

#40102		Push Only	Stroke 19"	12 Volt	12 Amp
#40106		Push Only	Stroke 19"	24 Volt	6 Amp
#40107		Push-Pull	Stroke 19"	12 Volt	12 Amp
#40103		Push Only	Stroke 23"	12 Volt	12 Amp
#40113		Push-Pull	Stroke 12"	12 Volt	12 Amp
#40117	Pair	Push Only	Stroke 23"	12 Volt	12 Amp
#40110		Push Only	Stroke 23"	24 Volt	6 Amp
#40115		Push-Pull	Stroke 23"	12 Volt	12 Amp
#40118	Pair	Push-Pull	Stroke 23"	12 Volt	12 Amp

### Cylinder, piston and brackets in anodized Aluminum.

- Push-Pull Versions allows the same power in both directions (in and out).
- Push-Only Versions allows to lift the struts by hand in case of lack of power or breakdown.
- Available as a pair.
- Supplied with an electronic control box for each strut to control and protect against overloads.
- It's necessary to add a 3 positions switch with automatic return to the OFF state.
- Available for 12 or 24VDC power.
- Available with strokes ranging between 4" and 114".
- IP65 Splash Proof
- Previous thrust was 440 lbs.

### 550 LB. CAPACITY



Max. 4 cycles/10 minutes Max. 2 cycles/10 minutes

# Electric TV Lifts




Engineered for the marine environment, these lifts are built with light anodized aluminum alloy. Standard units can accept up to 60" TV screens. On request we can produce units for larger TV sizes.

- Bulkhead or Floor mount
- 12V or 24V
- Made with marine grade anodized aluminum and 316 Stainless Steel 2-stage worm screw
- IP 67 Indoor or outdoor use
- 220 lbs. Lifting capacity
- Encoded system allows one touch operation. Adjustable top and bottom positions. Includes switch.
- Optional remote control
- Custom sizes on request


## Bulkhead Mount

- #40330** 12V 19-5/8" Stroke
- #40331** 24V 19-5/8" Stroke
- #40340** 12V 25-1/2" Stroke
- #40341** 24V 25-1/2" Stroke
- #40350** 12V 31-1/2" Stroke
- #40351** 24V 31-1/2" Stroke

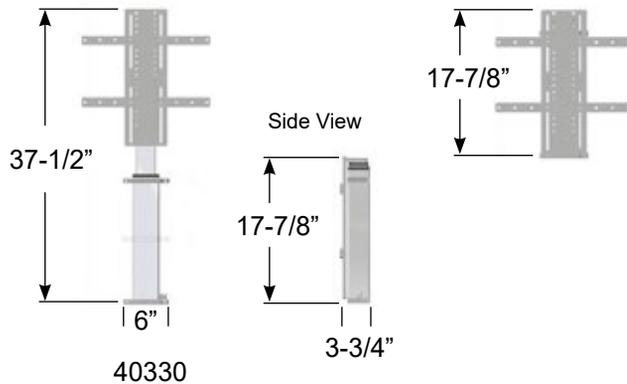


## Floor Mount

- #40300** 12V 19-5/8" Stroke
- #40301** 24V 19-5/8" Stroke
- #40310** 12V 25-1/2" Stroke
- #40311** 24V 25-1/2" Stroke
- #40320** 12V 31-1/2" Stroke
- #40321** 24V 31-1/2" Stroke

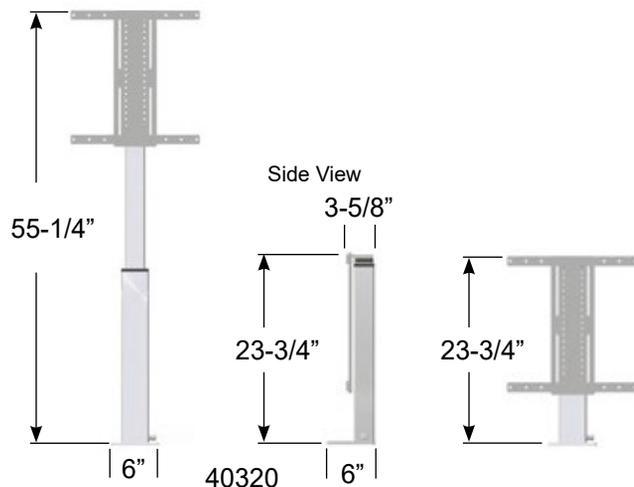


## Door/Hatch Holders


---

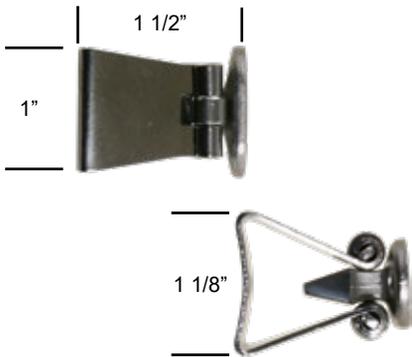


**#10008**  
Small size door holder  
**Material:** Stainless Steel  
**Shipping Weight:** 1 lb.

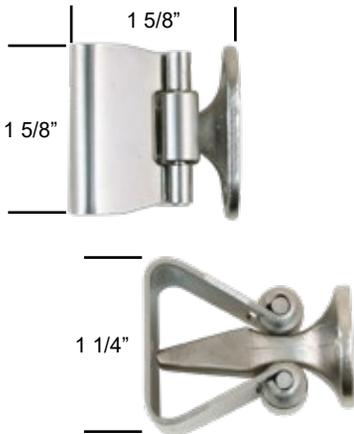

**#10009**  
Large size door holder  
**Material:** Stainless Steel  
**Shipping Weight:** 1 lb.

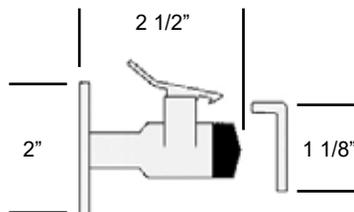

**#14308**  
Large size door holder with spring latch and rubber bumper  
**Material:** Stainless Steel  
**Shipping Weight:** 1 lb.

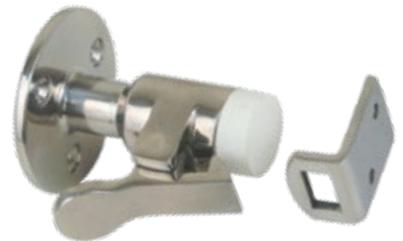

## Dressing & Sealer

### WARNING

This product can expose you to certain chemicals, which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to

[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



Coverage is approximately 55-65 ft<sup>2</sup> / lt.

**TEAK WONDER® DRESSING & SEALER** is a safe and durable, non-oil based product which provides a pleasant golden color without darkening the fake or producing that fake colored look. **TEAK WONDER® DRESSING & SEALER** does not make the teak glossy or slippery, does not darken the teak and does not build up an accumulation on the surface.

**#60100:** 1/2 liter can (Case Quantity: 12)

**#60101:** 1 liter can (Case Quantity: 8)

**#60105:** 4 liter can (Case Quantity: 4)

## Cleaner

Coverage is approximately 65-85 ft<sup>2</sup> / lt. (depending on the condition of the wood)



**TEAK WONDER® CLEANER** is a powerful cleanser that thoroughly cleans the teak easily and with very little effort, without the need for sanding.

**#60120:** 4 liter bottle (Case Quantity: 4)

## Combo Pack

Coverage is approximately 85-100 ft<sup>2</sup> / lt. (depending on the condition of the wood)



The **TEAK WONDER® COMBO PACK** is a complete kit for cleaning small areas. The kit contains one bottle of cleaner and one bottle of brightener to perform the complete cleaning cycle. The one liter bottles are equipped with a handy cap/pourer that allows easy use of the product, avoiding waste.

**#60110:** Combo Pack of 1 lt. bottles  
(Case Quantity: 8 Combo Packs)

## Instant Teak Cleaner



To remove grease stains from small areas without need of rinsing thoroughly.

**#60140:** 250 ml. bottle (Case Quantity: 12)

## Brightener

Coverage is approximately 85-100 ft<sup>2</sup> / lt. (depending on the condition of the wood)



**TEAK WONDER® BRIGHTENER** is a lightening process used to eliminate shading from the teak which may still persist even after the application of the **TEAK WONDER® CLEANER**.

**#60125:** 4 liter bottle (Case Quantity: 4)



**#60115:** Combo Pack of 4 lt. bottles  
(Case Quantity: 2 Combo Packs)

All Scandvik's products are unconditionally *guaranteed to the original purchaser against defects in materials or workmanship for a period of one year*, with the following exceptions:

**ABA 316 Hose Clamps**  
Lifetime warranty  
**Dolphin Battery Chargers**  
3 year limited warranty


Our warranty does not apply to or include any product that has been improperly installed, received improper maintenance or no maintenance at all, being used under conditions exceeding recommended loads or torques as described in Scandvik's catalog or subjected to misuse, negligence, accident or being modified in an unauthorized manner or unauthorized repair, normal wear and tear or electric motor burn-out.

- All measurements in the catalog are **approximate and subject to standard acceptable tolerance variation**.
- *All specifications subject to change, due to our continuous product development.*
- *All products subject to design improvements and change.*
- *All products subject to change without notice.*

THE COMPANY SHALL NOT BE LIABLE FOR CONSEQUENTIAL DAMAGES INCLUDING BUT NOT LIMITED TO; LOSS OF USE OF THE PRODUCT, LOSS OF TIME, INCONVENIENCE, LABOR TO REMOVE OR REINSTALL OR LOSS OF INCOME. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WRITTEN OR ORAL, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

#### **TO RETURN A PRODUCT**

Call **800-535-6009** and ask for a RETURN AUTHORIZATION NUMBER. Leave your name, address and phone number, date of purchase, item number (if possible) and type of product. When the product is returned, include proof of purchase, make sure that the aforementioned information is enclosed and explain the malfunction and how the product was used.

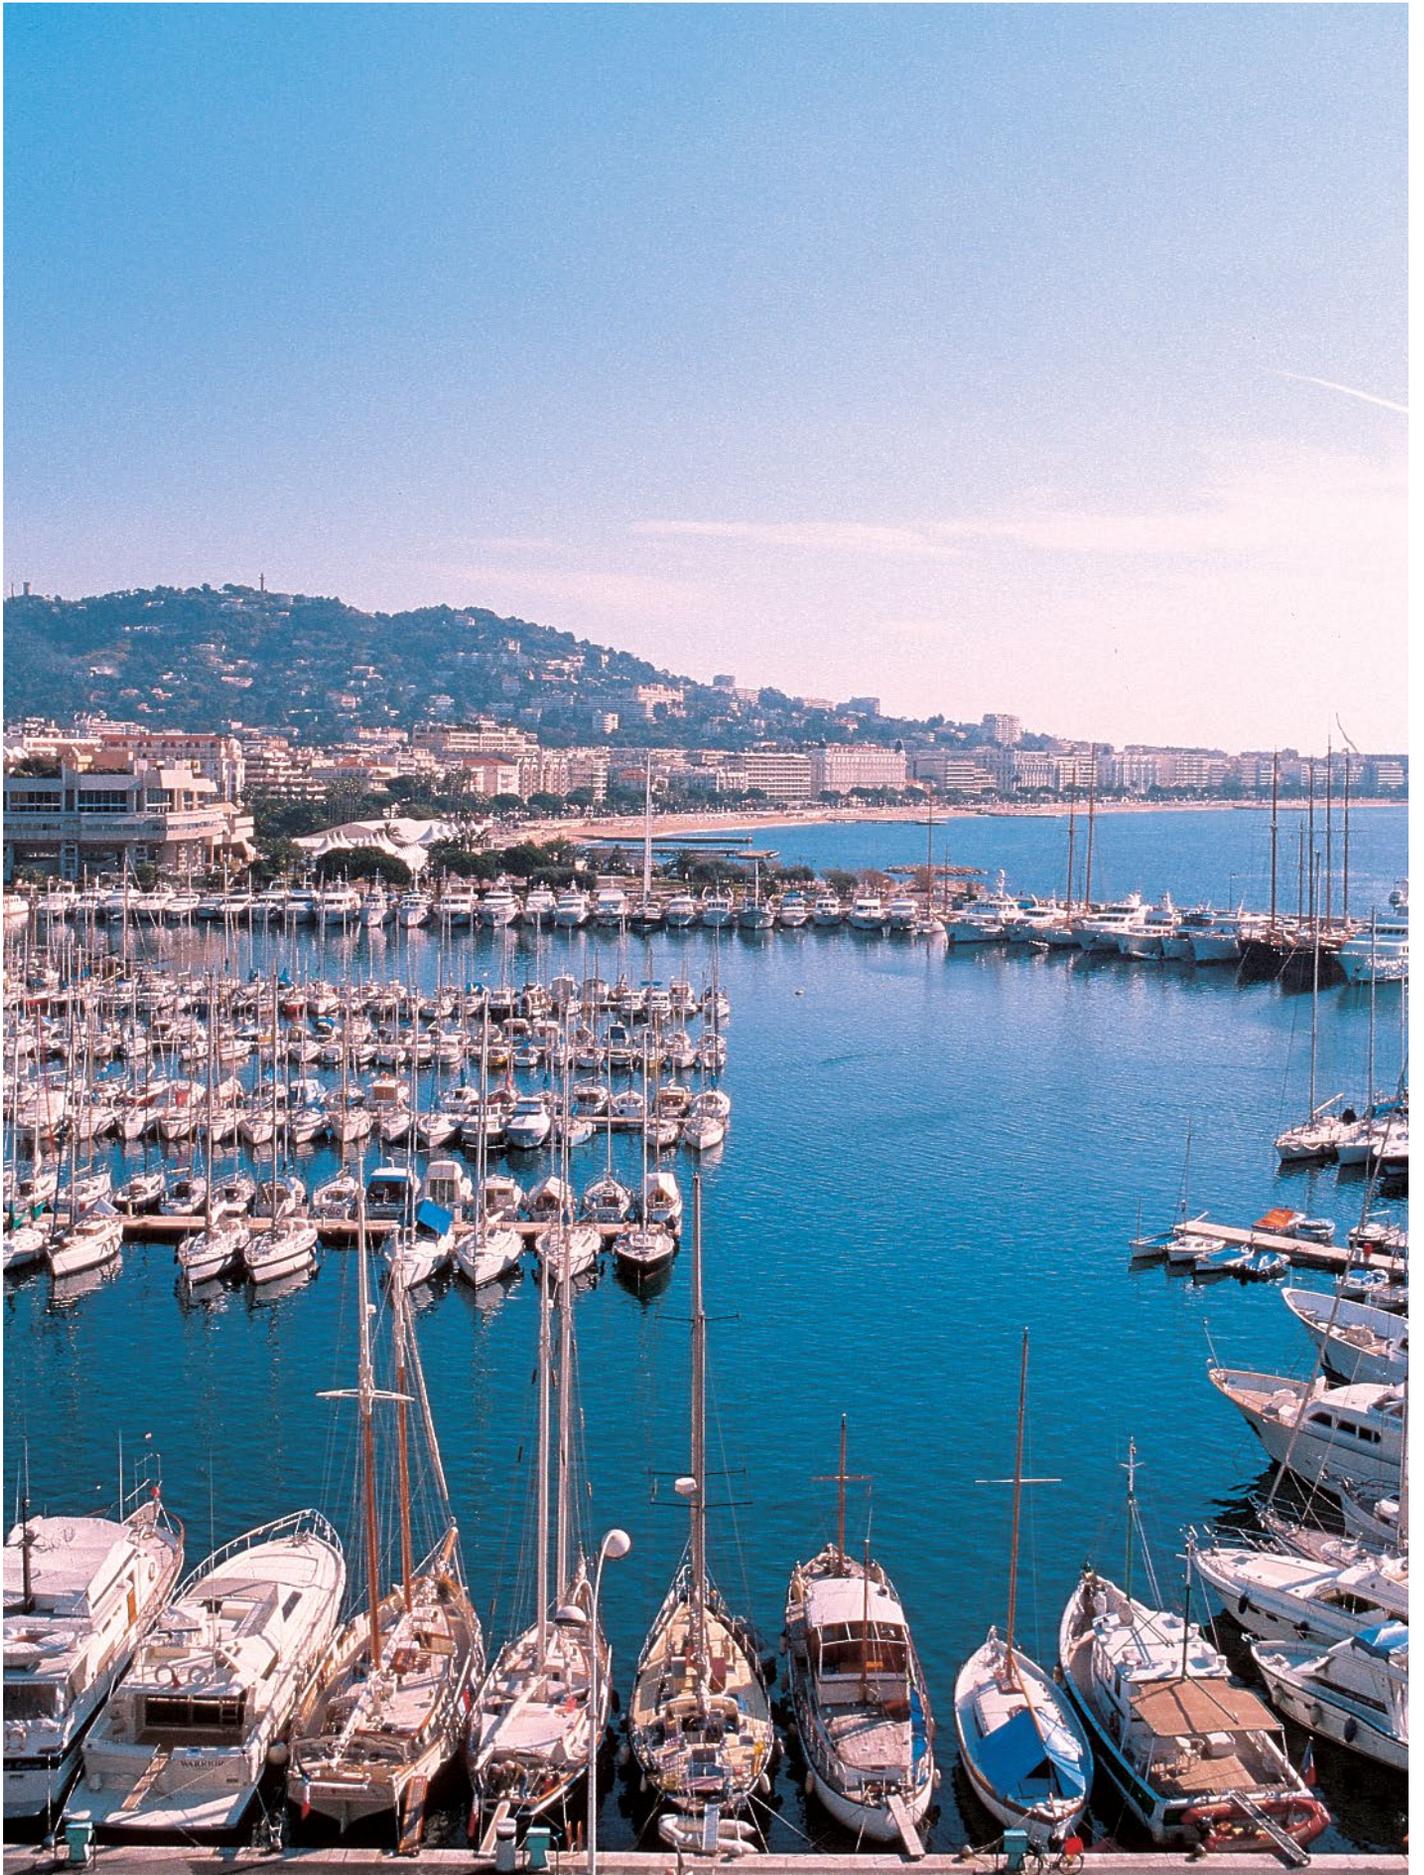

# Index

Part #	Page						
10000	25	10190	23	10232	103	10280	99
10002	94	10191	23	10233	104	10281	99
10003	48	10192	23	10233	104	10283	88
10004	25	10193	23	10234	104	10286	91
10007	48	10194	23	10234	104	10288	90
10008	180	10195	22	10235	104	10289	91
10009	180	10196	22	10236	104	10290	90
10012	25	10197	22	10237	104	10291	91
10013	37	10198	22	10238	103	10292	90
10014	87	10199	23	10239	104	10293	89
10015	94	10201	99	10240	105	10294	89
10017	93	10202	99	10241	100	10295	88
10018	92	10203	99	10242	100	10296	89
10019	92	10204	99	10243	100	10297	88
10026	94	10205	101	10244	100	10298	17
10027	94	10206	99	10245	102	10299	17
10029	87	10207	99	10247	100	10300	106
10030	87	10209	101	10251	86	10301	108
10031	87	10210	102	10252	87	10302	108
10050	75	10211	99	10253	87	10303	108
10054	22	10212	101	10254	86	10304	108
10055	17	10213	101	10258	100	10305	109
10056	75	10214	101	10259	86	10306	106
10062	41	10215	101	10260	86	10307	106
10086	22	10216	101	10262	87	10308	106
10089	75	10217	101	10263	87	10309	109
10091	39	10218	101	10264	87	10310	107
10092	38	10219	101	10265	17	10311	107
10169	75	10220	101	10266	100	10312	106
10172	75	10222	102	10268	86	10313	106
10175	38	10223	102	10269	86	10314	109
10180	83	10224	102	10271	91	10315	107
10182	83	10225	102	10273	91	10316	107
10183	83	10226	103	10274	91	10317	107
10184	83	10227	103	10275	17	10318	108
10186	38	10228	103	10276	17	10320	91
10187	38	10229	103	10277	89	10321	90
10188	25	10230	103	10278	89	10322	91
10189	25	10231	103	10279	88	10323	90

# Index

Part #	Page						
10324	91	10479	45	10665	79	10956	95
10325	90	10480	61	10669	79	10957	94
10326	91	10485	71	10674	102	10959	95
10327	90	10487	43	10675	102	10960	95
10328	90	10488	61	10676	102	10961	94
10331	109	10494	87	10677	102	10962	94
10332	92	10498	17	10680	105	10993	101
10333	106	10500	42	10750	16	10996	100
10334	91	10501	42	10757	99	12095	12
10335	87	10502	43	10760	75	12101	12
10338	107	10504	42	10761	27	12102	87
10339	91	10507	45	10763	27	12103	87
10340	107	10510	40	10765	20	12104	87
10341	109	10512	40	10769	27	12105	87
10346	107	10580	82	10770	30	12106	14
10347	108	10581	80	10775	16	12107	14
10348	94	10611	17	10777	89	12108	14
10349	94	10615	42	10795	16	12109	15
10350	108	10617	42	10810	78	12110	15
10351	108	10618	75	10811	78	12113	20
10352	106	10620	83	10812	78	12114	11
10401	41	10621	83	10813	41	12114	20
10405	30	10622	79	10826	17	12117	14
10406	30	10623	42	10827	17	12119	14
10410	74	10624	42	10835	17	12121	15
10411	41	10625	42	10840	36	12122	15
10422	62	10626	55	10856	39	12123	14
10430	90	10632	104	10857	39	12124	11
10431	90	10637	57	10871	55	12125	11
10438	62	10640	20	10880	55	12127	12
10460	44	10641	20	10881	55	12128	11
10464	44	10642	20	10895	86	12130	11
10465	44	10649	104	10897	62	12131	11
10466	44	10650	36	10914	92	12133	11
10467	41	10651	102	10923	99	12134	12
10474	79	10654	101	10924	99	12139	12
10475	79	10658	104	10948	94	12140	14
10476	79	10663	83	10951	94	12141	13
10477	79	10664	83	10955	94	12142	13

# Index

Part #	Page						
12143	87	13032	120	13632	113	14042	22
12144	13	13038	113	13638	113	14043	22
12145	12	13038	119	13644	113	14044	22
12146	11	13044	113	13650	113	14048	86
12147	11	13044	120	13657	113	14053	22
12148	11	13050	113	13664	113	14054	22
12149	11	13050	119	13670	113	14055	23
12150	11	13050	120	13683	113	14066	23
12151	87	13301	118	13689	113	14067	36
12152	87	13302	118	13694	113	14070	21
12153	87	13303	118	13696	113	14071	21
12154	87	13304	118	13697	113	14072	109
12156	11	13305	118	13698	113	14073	109
12157	11	13306	118	13699	113	14074	22
12158	11	13307	118	14000	89	14075	22
12159	11	13308	118	14001	89	14076	108
12160	14	13310	118	14002	89	14077	21
12161	11	13312	118	14003	88	14078	21
12162	11	13314	118	14004	88	14080	37
12163	14	13316	118	14005	88	14084	39
12164	11	13318	118	14006	89	14085	27
12165	13	13320	118	14010	93	14087	30
12166	13	13322	118	14017	87	14090	83
12167	13	13323	118	14022	23	14091	30
12169	13	13508	112	14023	88	14100	20
12172	14	13509	112	14024	88	14101	20
13001	145	13510	112	14025	23	14103	20
13014	113	13511	112	14026	23	14108	20
13017	113	13512	112	14027	23	14112	30
13017	119	13513	112	14028	23	14117	30
13017	120	13514	112	14029	22	14119	30
13020	113	13515	112	14030	22	14122	21
13020	119	13516	112	14031	22	14126	21
13020	120	13517	112	14032	22	14128	21
13024	113	13614	113	14037	23	14140	30
13028	113	13617	113	14038	23	14157	21
13028	119	13620	113	14039	23	14217	90
13028	120	13624	113	14040	23	14227	30
13032	113	13628	113	14041	23	14229	90

# Index

Part #	Page						
14268	91	14424	63	16135	18	16310	74
14269	91	14428	79	16136	18	16311	63
14289	100	15890	93	16140	18	16312	69
14301	91	15903	92	16141	18	16313	66
14302	91	15914	93	16190	76	16315	65
14306	94	15929	37	16191	66	16316	46
14308	180	15933	88	16195	39	16326	74
14340	88	15948	28	16198	72	16420	42
14341	88	15948	48	16199	68	16605	73
14343	88	15950	88	16200	68	16606	66
14350	91	15951	89	16201	44	16610	58
14351	91	15954	92	16202	64	16615	54
14352	91	15959	90	16203	64	16616	56
14353	91	15982	92	16204	40	16620	60
14360	90	15983	92	16205	45	16622	58
14361	90	15984	92	16206	47	16705	73
14362	90	15995	91	16210	69	16706	66
14363	90	16000	77	16211	63	16710	58
14364	90	16002	57	16212	60	16715	54
14365	90	16006	77	16215	24	16716	56
14371	74	16007	67	16216	50	16722	58
14400	78	16016	77	16217	50	17044	92
14405	53	16020	77	16222	19	17064	92
14406	53	16026	77	16223	19	17100	92
14407	53	16040	77	16224	19	17101	93
14408	53	16050	42	16250	68	17102	92
14410	51	16062	57	16251	45	17103	93
14411	53	16100	34	16251	68	17113	88
14412	53	16101	34	16252	68	17114	40
14413	53	16102	34	16253	45	18000	95
14414	51	16103	34	16253	68	18001	95
14415	53	16104	34	16265	45	18003	95
14416	53	16105	34	16290	60	18004	95
14417	51	16106	34	16295	73	18005	95
14419	51	16110	34	16298	28	18010	95
14420	72	16111	34	16300	47	18015	95
14421	58	16112	34	16301	85	19004	109
14423	54	16114	32	16302	85	19005	98
14424	58	16116	32	16303	85	19005	109

# Index

Part #	Page						
19006	109	40101	177	40170	162	40401	160
19007	98	40102	178	40171	170	41024	93
19007	109	40103	178	40173	163	41140	144
19089	86	40104	177	40174	163	41141	145
22008	112	40105	177	40175	166	41142	145
22009	112	40106	178	40176	166	41144	144
22010	112	40107	178	40177	163	41145	145
22011	112	40110	178	40179	165	41146	145
22012	112	40111	177	40181	164	41201	133
22013	112	40112	177	40183	165	41330	128
22014	112	40113	178	40184	165	41339	135
22015	112	40115	178	40188	168	41343	133
22016	112	40117	178	40189	162	41346	139
22017	112	40118	178	40193	164	41347	139
23000	98	40121	176	40198	169	41350	139
23001	98	40123	176	40199	172	41351	139
23010	98	40124	176	40200	162	41354	139
31601	119	40125	176	40220	162	41356	133
31602	119	40126	176	40221	162	41357	139
31611	119	40147	164	40222	162	41358	139
31612	119	40148	173	40231	167	41359	139
32301	118	40151	171	40232	167	41360	135
32302	118	40152	170	40240	163	41362	135
32303	118	40153	171	40241	163	41365	128
32304	118	40154	169	40245	165	41366	128
32305	118	40155	169	40246	165	41381	134
32306	118	40156	173	40250	161	41382	134
32307	118	40157	170	40251	161	41383	134
32308	118	40159	168	40273	163	41384	134
32310	118	40160	170	40274	163	41435	132
32312	118	40161	168	40283	165	41436	132
32314	118	40162	165	40284	165	41437	132
32316	118	40163	165	40330	179	41460	133
32318	118	40164	168	40331	179	41510	140
32320	118	40166	170	40340	179	41511	140
32322	118	40167	172	40341	179	41514	140
32323	118	40168	162	40350	179	41515	140
37037	117	40169	162	40351	179	41516	140
40100	177	40170	162	40400	160	41517	140

# Index

Part #	Page						
41520	140	46014	49	50033	120	50217	115
41521	140	46015	49	50034	114	60002	119
41522	140	46016	49	50035	114	60003	119
41523	140	46017	49	50035	119	60100	181
41524	140	46018	49	50035	120	60101	181
41525	140	46019	49	50036	114	60105	181
41599	141	46020	49	50036	120	60110	181
41607	136	46021	49	50037	114	60115	181
41607	137	46022	49	50037	120	60120	181
41610	137	46023	49	50038	114	60125	181
41611	137	46024	52	50038	119	60140	181
41612	137	46025	52	50038	120	66057	113
41613	137	46026	52	50039	114	66057	120
41640	135	46027	52	50039	120	66064	113
41641	135	46029	52	50040	114	66064	119
41643	135	46030	50	50041	114	66064	120
41644	135	46031	50	50042	114	66070	113
41645	135	46032	50	50043	114	66070	120
41647	135	46033	50	50044	114	66076	113
41650	138	46034	50	50045	114	66083	113
41651	138	46035	50	50048	114	66089	113
41652	138	50010	114	50049	114	66095	113
45100	70	50010	119	50200	115	66102	113
45120	43	50010	120	50201	115	66108	113
45125	29	50011	114	50202	115	66114	113
45130	48	50011	120	50203	115	66127	113
45130	29	50012	114	50204	115	66140	113
46000	52	50012	119	50205	115	66140	113
46002	52	50013	114	50206	115	66152	113
46003	52	50014	114	50207	115	66152	113
46004	49	50015	114	50208	115	66165	113
46005	49	50016	114	50209	115	66165	113
46006	49	50017	114	50210	115	66178	113
46007	49	50030	114	50211	115	66178	113
46009	52	50031	114	50212	115	66191	113
46010	52	50032	114	50213	115	66203	113
46011	52	50032	119	50214	115	66216	113
46012	52	50032	120	50215	115	66232	113
46013	49	50033	114	50216	115	66257	113

# Index

Part #	Page						
66283	113	67100	117	70000	75	71024	93
66308	113	67101	117	70001	74	71029	90
67000	117	67102	117	70002	62	71039	26
67001	117	67103	117	70101	26	71056	90
67002	117	67104	117	70102	26	74010	93
67003	117	67105	117	70103	71	74024	93
67004	117	67106	117	70104	57	74040	88
67005	117	67107	117	70105	43	74103	71
67006	117	67108	117	70106	76	74106	76
67007	117	67109	117	70108	67	74107	76
67008	117	67110	117	70112	26	74110	73
67009	117	67111	117	70350	26	74121	58
67010	117	67112	117	70353	84	74122	54
67011	117	67113	117	70357	84	74125	81
67012	117	67114	117	70358	85	74126	81
67013	117	67115	117	70359	84	74127	80
67014	117	67116	117	70360	84	74130	61
67015	117	67117	117	70361	85	74140	46
67016	117	67118	117	70401	84	74150	35
67017	117	67119	117	70402	84	74151	35
67018	117	67120	117	70403	84	74153	35
67019	117	67121	117	70405	85	74160	88
67020	117	67122	117	70407	85	74161	88
67021	117	67123	117	70499	45	74165	47
67022	117	67124	117	70502	64	74166	48
67023	117	67125	117	70503	64	74169	90
67024	117	67126	117	70510	46	74170	28
67025	117	67127	117	70600	72	74180	28
67026	117	67128	117	70601	59	99030	149
67027	117	67129	117	70602	43	99031	157
67029	117	67130	117	70603	26	99040	149
67030	117	67131	117	70604	48	99041	149
67031	117	67132	117	70606	26	99050	149
67032	117	67133	117	71001	90	99165	155
67033	117	67134	117	71003	88	99175	155
67034	117	67135	117	71004	36	99185	155
67035	117	67136	117	71005	26	99201	156
67036	117	67138	117	71005	37	99202	156
67038	117	67317	117	71006	26	99215	147

# Index

Part #	Page						
99225	147	41036P	143	41112P	143	41376P	122
99454	151	41037P	143	41113P	143	41377P	122
99464	151	41038P	142	41114P	142	41378P	123
99474	151	41039P	142	41115P	142	41379P	122
99484	151	41040P	142	41120P	143	41380P	123
99501	153	41041P	142	41121P	143	41385P	122
99502	153	41050P	142	41122P	143	41386P	122
99503	153	41051P	142	41290P	123	41387P	123
99504	153	41052P	142	41291P	123	41388P	130
99505	153	41053P	142	41292P	123	41389P	130
99510	153	41070P	142	41293P	123	41393P	122
99511	153	41071P	142	41300P	122	41394P	122
99512	153	41072P	142	41301P	122	41395P	122
99520	157	41073P	142	41302P	122	41396P	129
07006	67	41075P	142	41303P	122	41397P	130
07008	69	41080P	142	41317P	123	41420P	122
07014	35	41081P	142	41320P	124	41421P	122
07023	56	41082P	142	41321P	124	41423P	123
07032	56	41083P	142	41322P	126	41430P	141
07036	31	41084P	143	41323P	125	41431P	141
07037	42	41085P	143	41324P	125	41432P	141
07039	47	41086P	143	41325P	125	41440P	132
19052P	128	41087P	143	41340P	125	41441P	132
19053P	128	41088P	143	41346P	139	41445P	132
41000P	142	41089P	143	41347P	139	41446P	132
41001P	142	41090P	143	41350P	139	41450P	133
41008P	142	41092P	143	41351P	139	41451P	133
41009P	142	41095P	143	41354P	139	41461P	125
41010P	142	41097P	142	41357P	139	41462P	125
41011P	142	41100P	143	41358P	139	41465P	126
41020P	142	41101P	143	41359P	139	41466P	126
41022P	142	41102P	143	41364P	127	41467P	126
41023P	142	41103P	143	41367P	134	41472P	126
41030P	142	41104P	143	41368P	122	41480P	127
41031P	142	41105P	143	41369P	124	41483P	124
41032P	142	41106P	143	41370P	124	41484P	124
41033P	142	41107P	143	41371P	134	41559P	124
41034P	142	41110P	143	41372P	134	41561P	124
41035P	143	41111P	143	41373P	123	41570P	134











**Scandvik, Inc.  
423 4th Place SW  
Vero Beach, FL 32962**

**1-800-535-6009  
[www.scandvik.com](http://www.scandvik.com)**